

**Model 27956  
DECT6.0 Cordless Handset  
with Picture Caller ID  
& Slide Show  
User's Guide**



**Quick  
Start**  
on page 7

Your new GE telephone system is **EXPANDABLE** up to a total of 4 handsets  
(by purchase of optional Model 27911 handset with charge cradle)

# **Equipment Approval Information**

---

Your telephone equipment is approved for connection to the Public Switched Telephone Network and is in compliance with parts 15 and 68, FCC Rules and Regulations and the Technical Requirements for Telephone Terminal Equipment published by ACTA.

## **1 Notification to the Local Telephone Company**

On the bottom of this equipment is a label indicating, among other information, the US number and Ringer Equivalence Number (REN) for the equipment. You must, upon request, provide this information to your telephone company.

The REN is useful in determining the number of devices you may connect to your telephone line and still have all of these devices ring when your telephone number is called. In most (but not all) areas, the sum of the RENs of all devices connected to one line should not exceed 5. To be certain of the number of devices you may connect to your line as determined by the REN, you should contact your local telephone company.

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

### **Notes**

- This equipment may not be used on coin service provided by the telephone company.
- Party lines are subject to state tariffs, and therefore, you may not be able to use your own telephone equipment if you are on a party line. Check with your local telephone company.
- Notice must be given to the telephone company upon permanent disconnection of your telephone from your line.
- If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this product does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

**US Number is located on the cabinet bottom.**

**REN Number is located on the cabinet bottom.**

## **2 Rights of the Telephone Company**

Should your equipment cause trouble on your line which may harm the telephone network, the telephone company shall, where practicable, notify you that temporary discontinuance of service may be required. Where prior notice is not practicable and the circumstances warrant such action, the telephone company may temporarily discontinue service immediately. In case of such temporary discontinuance, the telephone company must:

(1) promptly notify you of such temporary discontinuance; (2) afford you the opportunity to correct the situation; and (3) inform you of your right to bring a complaint to the Commission pursuant to procedures set forth in Subpart E of Part 68, FCC Rules and Regulations.

The telephone company may make changes in its communications facilities, equipment, operations or procedures where such action is required in the operation of its business and not inconsistent with FCC Rules and Regulations. If these changes are expected to affect the use or performance of your telephone equipment, the telephone company must give you adequate notice, in writing, to allow you to maintain uninterrupted service.

## **Interference Information**

---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference; and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

Privacy of Communications may not be ensured when using this product.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is "receiving" the interference).
- Reorient or relocate and increase the separation between the telecommunications equipment and receiving antenna.
- Connect the telecommunications equipment into an outlet on a circuit different from that to which the receiving antenna is connected.

If these measures do not eliminate the interference, please consult your dealer or an experienced radio/television technician for additional suggestions. Also, the Federal Communications Commission has prepared a helpful booklet, "How To Identify and Resolve Radio/TV Interference Problems." This booklet is available from the U.S. Government Printing Office, Washington, D.C. 20402. Please specify stock number 004-000-00345-4 when ordering copies.

**NOTICE:** The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

# Hearing Aid Compatibility (HAC)

This telephone system meets FCC standards for Hearing Aid Compatibility.

## Licensing

Licensed under US Patent 6,427,009.

## FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.”



## Information for DECT Product



This telephone is compliant with the DECT 6.0 standard which operates in the 1.92GHz to 1.93GHz frequency range. Installation of this equipment is subject to notification and coordination with UTAM. Any relocation of this equipment must be coordinated through and approved by UTAM. UTAM may be contacted at 1-800-429-8826.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

**WARNING: TO PREVENT FIRE OR ELECTRICAL SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.**

|   |  |   |
|---|--|---|
|  <p>THE LIGHTNING FLASH AND ARROW HEAD WITHIN THE TRIANGLE IS A WARNING SIGN ALERTING YOU OF "DANGEROUS VOLTAGE" INSIDE THE PRODUCT.</p> | <p><b>CAUTION:</b><br/>RISK OF ELECTRIC SHOCK<br/>DO NOT OPEN</p> <p>CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.</p> |  <p>THE EXCLAMATION POINT WITHIN THE TRIANGLE IS A WARNING SIGN ALERTING YOU OF IMPORTANT INSTRUCTIONS ACCOMPANYING THE PRODUCT.</p> |
| <p>SEE MARKING ON BOTTOM / BACK OF PRODUCT</p>  |  |   |

# Table of Contents

---

|  |           |   |           |
|--|-----------|---|-----------|
| Equipment Approval Information .....     | 2         | Power Saver .....                         | 21        |
| Interference Information .....           | 3         | Frame On/Off Time .....                   | 22        |
| Hearing Aid Compatibility (HAC) .....    | 4         | Brightness .....                          | 22        |
| Licensing .....                          | 4         | Language .....                            | 22        |
| FCC RF Radiation Exposure Statement..    | 4         | Reset All Settings.....                   | 23        |
| Information for DECT Product.....        | 4         | <b>Programming the Telephone.....</b>     | <b>23</b> |
| Table of Contents.....                   | 5         | Handset Setup.....                        | 23        |
| Table of Contents.....                   | 6         | Language .....                            | 24        |
| Quick Start .....                        | 7         | Ring Volume .....                         | 24        |
| Introduction .....                       | 8         | Tones .....                               | 24        |
| <b>Before You Begin.....</b>             | <b>8</b>  | Auto Talk .....                           | 25        |
| Parts Checklist.....                     | 8         | Handset Name.....                         | 25        |
| Telephone Jack Requirements .....        | 9         | Base Setup .....                          | 26        |
| <b>Installation .....</b>                | <b>9</b>  | Area Code.....                            | 26        |
| Digital Security System .....            | 9         | Dial Mode.....                            | 26        |
| Important Installation Guidelines.....   | 9         | Date/Time.....                            | 26        |
| <b>Handset Layout.....</b>               | <b>10</b> | Registration .....                        | 27        |
| <b>Base Layout .....</b>                 | <b>11</b> | De-Registration.....                      | 28        |
| <b>Installing the Phone .....</b>        | <b>12</b> | <b>Telephone Operation .....</b>          | <b>28</b> |
| Installing the Handset Battery.....      | 12        | Charge Indicator on Base.....             | 28        |
| Installing the Base/Photo Frame .....    | 13        | Making a Call .....                       | 28        |
| Changing the Photo Frame.....            | 14        | Answering Calls .....                     | 29        |
| Wall Mounting.....                       | 14        | Inserting a Pause in the Dialing          |           |
| <b>Programming the Photo Frame .....</b> | <b>15</b> | Sequence .....                            | 29        |
| Specifications .....                     | 15        | Redial.....                               | 29        |
| Frame Setup .....                        | 15        | Editing a Redial Record Before Dialing .. |           |
| Adding Photos.....                       | 15        | 30  |           |
| Picture-Caller ID Setup .....            | 17        | Storing a Redial Record in Phone Book ..  |           |
| Add New Picture Caller ID Link .....     | 17        | 30  |           |
| Edit Existing Picture Caller ID Link..   | 19        | Deleting a Redial Record.....             | 30        |
| Delete Existing Picture Caller ID Link   | 19        | Deleting All Redial Records.....          | 31        |
| Delete Photos .....                      | 19        | Call Timer.....                           | 31        |
| Frame Preferences.....                   | 20        | Auto Standby .....                        | 31        |
| Frame Display Mode.....                  | 20        | Ringer On/Off.....                        | 31        |
| Slide Show Setup.....                    | 21        | Flash.....                                | 31        |

# Table of Contents


---

|                                     |           |  |           |
|-------------------------------------|-----------|--|-----------|
| Mute.....                           | 32        | Editing a Phone Book Record.....       | 38        |
| Page.....                           | 32        | Deleting a Phone Book Record.....      | 38        |
| Receiver Volume Control.....        | 32        | Dialing a Phone Book Record.....       | 39        |
| Intercom Operation.....             | 32        | Chain Dialing from Phone Book.....     | 39        |
| Handset to Handset Intercom Call    | 32        | <b>Changing the Battery.....</b>       | <b>40</b> |
| Three-way Conferencing.....         | 33        | <b>Battery Safety Precautions.....</b> | <b>40</b> |
| <b>Caller ID (CID).....</b>         | <b>33</b> | <b>Display Messages.....</b>           | <b>41</b> |
| Call Waiting Caller ID.....         | 34        | <b>Handset Sound Signals.....</b>      | <b>42</b> |
| Receiving CID Records.....          | 34        | <b>Troubleshooting Guide.....</b>      | <b>42</b> |
| Storing CID Records (In CID Memory) | 34        | Telephone Solutions.....               | 42        |
| Reviewing CID Records.....          | 34        | Caller ID Solutions.....               | 43        |
| Dialing a CID Number.....           | 35        | Battery.....                           | 43        |
| Formatting a CID Number Before      |           | <b>General Product Care.....</b>       | <b>44</b> |
| Dialing.....                        | 35        | <b>Causes of Poor Reception.....</b>   | <b>44</b> |
| Storing CID Records into Phone Book | 36        | <b>Warranty Assistance.....</b>        | <b>45</b> |
| Deleting a CID Record.....          | 36        | <b>Accessory Information.....</b>      | <b>45</b> |
| Deleting All CID Records.....       | 37        | <b>Limited Warranty.....</b>           | <b>46</b> |
| <b>Phone Book.....</b>              | <b>37</b> | <b>Index.....</b>                      | <b>48</b> |
| Adding Phone Book Entries.....      | 37        |  |           |
| Reviewing Phone Book Records.....   | 38        |  |           |


# Quick Start

---

1. Insert the legs of the metal stand into the holes on the bottom of the base, push until they snap into place.

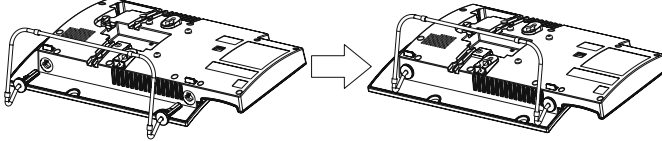


2. Connect the telephone line cord into the TEL LINE jack on the back of the base and the other end into a modular jack.
3. Connect the DC connector into the jack on the back of the base and the AC power adaptor into an electrical outlet. Once power is activated, frame will display sample slideshow.

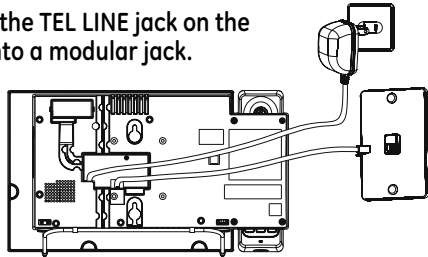

4. Connect the handset battery.

**PRESS DOWN  
FIRMLY**

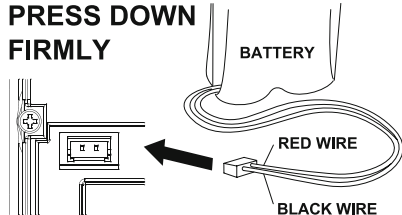

5. Insert a compatible memory card into the slot on the side of frame.
6. Press the menu/ok button to begin programming.

# Introduction

---



**CAUTION:** When using telephone equipment, there are basic safety instructions that should always be followed. Refer to the **IMPORTANT SAFETY INSTRUCTIONS** provided with this product and save them for future reference.


**IMPORTANT:** Because cordless phones operate on electricity, you should have at least one phone in your home that isn't cordless, in case the power in your home goes out.

## Before You Begin

---

### Parts Checklist

Make sure your package includes the items shown here.




Base w/Silver  
frame attached




Handset



Battery  
compartment  
cover



Additional  
Black frame




Metal stand




6 inch line cord



Telephone  
line cord



Handset  
battery pack




AC power  
adaptor



# Telephone Jack Requirements

To use this phone, you need an RJ11C type modular telephone jack, which might look like the one pictured here, installed in your home. If you don't have a modular jack, call your local phone company to find out how to get one installed.



## Installation

---

### Digital Security System

Your cordless phone uses a digital security system to protect against false ringing, unauthorized access, and charges to your phone line.

**INSTALLATION NOTE:** Some cordless telephones operate at frequencies that may cause or receive interference with nearby TVs, microwave ovens, and VCRs. To minimize or prevent such interference, the base of the cordless telephone should not be placed near or on top of a TV, microwave ovens, or VCR. If such interference continues, move the cordless telephone farther away from these appliances.

**Certain other communications devices may also use the 1.9 GHz frequency for communication, and, if not properly set, these devices may interfere with each other and/or your new telephone. If you are concerned with interference, please refer to the owner's manual for these devices on how to properly set channels to avoid interference. Typical devices that may use the 1.9 GHz frequency for communication include wireless audio/video senders, wireless computer networks, multi-handset cordless telephone systems, and some long-range cordless telephone systems.**

### Important Installation Guidelines

- Avoid sources of noise and heat, such as motors, fluorescent lighting, microwave ovens, heating appliances and direct sunlight.
- Avoid areas of excessive dust, moisture and low temperature.
- Avoid other cordless telephones or personal computers.
- Never install telephone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch non-insulated telephone wires or terminals, unless the telephone line has been disconnected at the network interface.
- Use caution when installing or modifying telephone lines.

# Handset Layout

