

**Zoom Date 135V**  
**Zoom 135V**



**3.6x ZOOM**



**135mm**



**38mm**



**Zoom Date 135V**  
features convenient date  
& time imprint.




**Fujifilm 35mm Compact Camera**  
ZOOMDATE 135V/ZOOM 135V ZOOMDATE 120V/ZOOM 120V

**Specifications**

**■ = ZOOM 135V / ZOOM DATE 135V**  
**■ = ZOOM 120V / ZOOM DATE 120V**

- Film: 135 DX-coded roll film
- Picture size: Standard size : 24mm x 36mm
- Lens: Fujinon 3.6x zoom lens ; 38-135mm, f/5.2 - 11  
6 components, 6 elements.  
Fujinon 3.2x zoom lens ; 38-120mm, f/5.2 - 10  
6 components, 6 elements.
- Viewfinder: Real image type zoom viewfinder, 0.40 - 1.25x 0.40 - 1.10x magnification with AF frame, Parallax correction guides, AF lamp
- Focusing: Active type auto-focus, wide-angle : 0.65m (2.1ft.) - ∞, telephoto : 0.9m (3.0ft.) - ∞, with AF lock, landscape mode (long distance lens position setting, flash off setting), AF lamp
- Shutter: Programmed electronic shutter release, 1-1/250 sec. shutter speeds
- Exposure control : Automatic exposure control Interlocking range (ISO 100)  
Wide-angle (at 38mm): EV 10.6 (\*6.0)-16.3  
Telephoto (at 135mm): EV 14.0 (\*7.0)-17.0  
(\* = values for flash off mode)  
Wide-angle (at 38mm): EV 10.6 (\*6.0)-16.3  
Telephoto (at 120mm): EV 13.8 (\*7.0)-17.0  
(\* = values for flash off mode)
- Film speed setting : Automatic (DX roll film) for speeds from ISO 50-3200
- Film loading: Fully automatic loading with rewinding (Drop-in Loading system)
- Film advance: Automatic (motorized) film wind and rewind system, provision for mid-roll rewinding (use the mid-roll rewind button)
- Flash: Built-in zoom type; fired automatically under low light in auto mode; Fill-in Flash on/off, Night (slow synchronization) and Red-eye reduction modes; recycling time; 7 sec.
- Self-timer : Electronic controlled with 10-sec. delay
- LCD: Exposure mode symbols, self-timer settings, battery mark, flash charging sign, and remaining exposure frame number are displayed on LCD panel. \*Date mode and Remote control mode (Zoom Date 135V and Zoom Date 120V only)
- Battery: One lithium CR-123A/DL 123A lithium battery
- Dimensions: 110.0 x 63.0 x 49.0mm / 4.3 x 2.5 x 1.9in (main unit)
- Weight: 185g / 6.5oz. (without battery)

*Note: Specifications are subject to change without notice.  
Photos are for purpose of illustrating functions and may differ from actual product.*




THE AUTOMATIC CHOICE  
FOR ALL 35mm  
COMPACT CAMERAS

**FUJICOLOR**

**FUJIFILM**

**FUJI PHOTO FILM U.S.A., INC.**

200 Summit Lake Drive, Valhalla, NY 10595-1356, U.S.A.  
For More details call 1-800-800-FUJI or visit our web site: [www.fujifilm.com](http://www.fujifilm.com)



Ref. No. CGEB-401U(CA-04-01-MW) Printing in Japan © 2004 FUJI PHOTO OPTICAL CO., LTD.

**FUJIFILM**  
I&I - Imaging & Information

**35mm Compact Camera**

**Zoom Date 135V**  
**Zoom 135V**

**Zoom Date 120V**  
**Zoom 120V**




**NEW**



**Film Loading Is Easier than Ever**  
**New Photo-Friendly Zoom**



## Beautiful Photos, Effortlessly! Your Choice of **3.6x** or **3.2x** Zoom

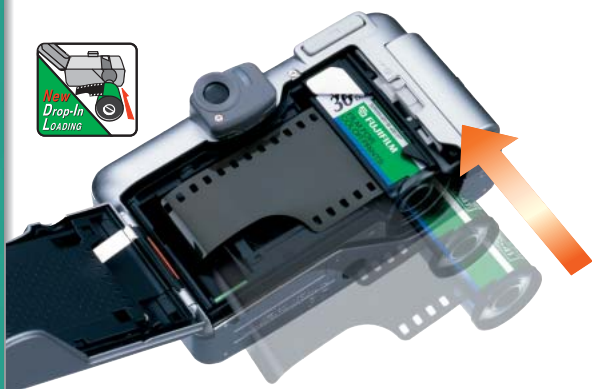

### New DIL (Drop-in Loading) Makes it Easy

Just open the camera, drop in the film, and you're ready to shoot. The camera back opens wide, so it's easy to see what you're doing. And the rewinding function advances the film as you shoot, so your photos are safe, even if you accidentally open the camera back while the film's inside.



### Bright, Big Viewfinder Gives You the Whole Picture

The big, clear viewfinder lets you see the entire scene, making it quick and easy to compose great photos. All you need to do is aim, point, and shoot.

### Large LCD Panel Displays Shooting Data

A large, easy-to-read LCD panel is located on the back of the camera body, making it easy to confirm operating mode and shooting data at-a-glance.



# Zoom Date 120V Zoom 120V



## 3.2x ZOOM



### 120mm



### 38mm



**Zoom Date 120V**  
features convenient date  
& time imprint.



### High-Performance Fujinon Zoom

Choose the Zoom Date 135V/Zoom 135V, with 38-135mm 3.6x zoom. Or the Zoom Date 120V/Zoom 120V, with 38-120mm 3.2x zoom. All feature high-performance autofocus Fujinon lenses, for sharp, vivid photos, time and again.



### Zoom Flash Triggers Automatically in Low Light

The zoom flash system lets you shoot with confidence, even when the light is low. And a range of selectable modes ensures beautiful results in almost any situation.



### Auto mode

Automatically triggers the flash in low-light conditions; adjusts the amount of illumination according to the shooting range.

### Fill-in flash

Subjects in the foreground are clearly visible, even in backlit situations.



### Night portrait mode

Illuminates both the subject and the background.

### Red-eye reduction mode

Minimizes unsightly red-eye effect.

### Flash off mode

Suppresses the flash for creating atmospheric effects with available light.

### Landscape mode

Ensures beautiful photos of distant scenery.

### Electronic self-timer

Lets you put yourself in the picture.

### Remote-control (for Zoom Date 135V/Zoom Date 120V)

Infrared wireless remote control operates at a range of up to 16.4 feet\*. \*Requires remote control unit; sold separately