

Any Time, Anywhere

Unication is committed to Provide You the Best Solution

G4 Voice Pager Supports **P25 Radio** Systems Now! **Analog / Digital / Multi-Protocol**



Voice Pager Specially Designed for Public Safety

- ▀ Advanced Radio Performance
- ▀ Mission Critical Applications
- ▀ Optional GSM Features Available



If you have any requirements, please call our toll free number: 888-657-2963.
www.unication.com

INDEX

● Part A: G4 Specifications and Features	1
● Part B: Pager Overview	4
▶ B1 Pager Appearance	4
▶ B2 LCD Display	5
▶ B3 LED Introduction	5
▶ B4 Icon Introduction	6
● Part C: Operation Introduction	7
▶ C1 Initial Use	7
▶ C2 Pager Message Box	8
▶ C3 Function status	9
▶ C4 Voice Memo Box	11
▶ C5 All Band Scan	12
▶ C6 Function Setting	13
▶ C7 Information	15
▶ C8 Diagnostic	16
● Part D: Warning and Important Notes	17

Part A. G4 Specifications and Features

G4 Digital Trunking and Analog Voice Pager Specification & Feature

A1 Operating Environment			
a	Physical Operating Environment	Operating Temperature Range	-30 to + 60°C
		ESD (Electrostatic Discharge)	contact ± 8KV Air ± 15KV
b	System Operating Environment	Available Modulation Type	Analog (AM / FM)
			Digital (TDMA / FDMA)
			Digital and Analog identify modulation type and decode protocol automatically at the same time. (on same channels and same frequencies)
		Available Support Protocol	Analog : 2-Tone / 5-Tone / MDC 1200 / CTCSS / CDCSS
Digital	DMR Conventional		
	P25 Conventional		
	DMR Trunking		
Available Support Frequency Range	VHF Band : 136MHz~174MHz		
	UHF Band : 406MHz~512MHz		
	700 / 800 MHz Band : 764MHz~870MHz		
c	Apply to (Group)		
A2 Hardware Specification			
a	Mechanical	Fixed and Carry Style	Belt Clip
		Size	102 x 61 x 31.5 (L*W*H /mm)
		Weight (g)	Without Battery(g) : ≤ 220 (g)
		Dust / Waterproof	According to specification of MIL-810 & Ingress Protection Rating is IP 67
		Special Requirement	Drop Protection Pad
Display UV Protection			
b	Operation Buttons	Fixed Function Key	13
		Soft Key	4
		Navigation Key	1
		Power	
		Volume Control	
		Channel Switch	8
c	Display	Display Type	LCD
		Saturation (grayscale / full color)	full color
		Size (length x wide)	2.0 inches (30.6x40.8/mm)
		Number of Dots	220 x 176
		Characters & Length	9 lines x 22 characters
d	Backlights	Type (LED / EL ...) : LED	
e	LED	LED Type (monochrome / multicolor) : red / green / blue / orange	Power LED: No Brightness – Power off / Power on completed

Part A. G4 Specifications and Features

G4 Digital Trunking and Analog Voice Pager Specification & Feature

A2 Hardware Specification					
e	LED	LED Type (monochrome / multicolor) : red / green / blue / orange	Blue - Power on / Connected with USB cable / Charging completed Flash Blue - Charging Message LED: No Brightness – No signal Red - Receiving voice call or data call		
f	Frequency / Channel Specification	Frequency Setting	Channel Spacing	Wied Band : 20/25k Narrow Band :10/12.5k Scan : 2.5k	
		Number of Channels	Hardware : 8 (do not need to switch via software) Software : 64 (8 Ch / 8 Zone) (switch via software) Total : 64		
		Capcodes (Addresses) Frequency / Channel Specification of each channel	Analog Digital		
		Tone : Buzzer and speaker are the main device to be used as message alert and reminder Vibration : Motor and vibration speaker device are useful in meeting Tone and Vibration : Alert tone and vibration remind users as the same time Vibration then Tone : Vibrate first, then alert after few seconds Blacklight : Coloured backlights indicate users to identify the important level of each message, such as different colors, flashing backlights, different brightness LED : Different LED colors, flashing LED, different indicators			
h	External Port	Power Interface : 5V/1.5A DC Internal Power Supply / Battery input interface			
		Data recording streaming interface (PPS)	Mini USB		
		Wireless data streaming interface: (Bluetooth, WiFi...)			
i	Power Supply	Battery type : (Alkaline battery, Lithium Ion battery)	1. Lithium Ion Rechargeable Battery : 3.7V / 2450mA 2. Lilon Rechargeable Battery : 3.7V / 2450mA		
		Battery Life : (Average bettery life at 5/5/90 duty cycle, 3 paging per day)	> 24 hrs 2-Tone protocol continuous using 24 hrs per day Receiving 5 mins of 2-Tone voice message per hour		
j	Storage Memory	Built-in Storage Memory: (including voice, text & saving time of data)		Voice	
				Text	
				Others (Photos / Profiles...)	
A3 Electrical Characteristics					
a	Audio Performance	Audio quality : Audio input in 1KHz, then modulated by system	Receive	Hum & Noise Ratio	> 34 dB
				Squelch Level	< -57 dBw
			Audio Distortion	< 2 % (Electrical) < 3 % (Acoustic)	
		Play Back	Audio Distortion	< 3 % (Electrical) < 4 % (Acoustic)	
		SPL (12") : Alert tone loudness at 12 inches	Alert Output	96 +/- 2 dB SPL	

Part A. G4 Specifications and Features

G4 Digital Trunking and Analog Voice Pager Specification & Feature

A3 Electrical Characteristics

a	Audio Performance	SPL (12") : Alert tone loudness at 12 inches	Speech Output	94 +/- 2 dB SPL		
b	RF RX Performance	Frequency Stability : at the normal atmospheric temperature (25°C)	Low band	+/- 1 ppm		
			VHF			
			UHF			
		Channel Spacing : at (25 °C)	Low band	10/12.5/20/25 kHz		
			VHF			
			UHF			
		Alert Sensitivity 20 paging : at (25 °C)	Low band	≤ -121dBm		
			VHF			
			UHF			
		Alert Probability VS RF Level: at (25 °C)	Low band	100% @ Paging Sensitivity + 3 dB		
			VHF			
			UHF			
		Message Sensitivity 20 paging : (Voice Pager @ 12dB SINAD) (Alpha Pager 3 Non-error) : at (25 °C)	Low band	≤ 4.0 uv/m		
			VHF	≤ 2.5 uv/m		
			UHF	≤ 3.5 uv/m		
		Message Probability VS RF Level : (Voice Pager @ 12dB SINAD) (Alpha Pager 3 Non-error) : at (25 °C)	Low band	≤ 4.0 uv/m		
VHF	≤ 2.5 uv/m					
UHF	≤ 3.5 uv/m					
Adjacent Channel Selectivity : at (25 °C)	Low band	≥ 65 dB @ ±25 KHz				
	VHF					
	UHF					
Co - Channal Rejection : at (25 °C)	Low band	> -8 dB				
	VHF					
	UHF					
Intermodulation Rejection : at (25 °C)	Low band	≥ 70dB @ Alert				
	VHF	≥ 70dB @ 12dB SINAD				
	UHF					
Intermodulation High Level Third Order Rejection : at (25 °C)	Low band	≥ 35 dB @ PS.+60dB				
	VHF					
	UHF					
Spurious & Image Rejection : at (25 °C)	Low band	≥ 70 dB				
	VHF					
	UHF					
Blocking Rejection : at (25 °C)	Low band	≥ 90 dB				
	VHF					
	UHF					

A4 CERTIFICATION

a	Certification	FCC : Part 15 Subpart B / ICES-003			
		CE : EN55022 / EN55024 / EN61000-3-2 / EN61000-3-3			
		RoHS			
		UL	Division 1, Class I, Group C, D, / Class II, Group E, F, G		
		MIL-STD			

B. Additional Function with unique accessories

a	Audio Amplification / Enhance receiving signal / LED Display / Relay / Remote control (OTAC)
---	--

Part B. Pager Overview

B1. Pager Appearance

Front View



Side View



Rear View



Top View



● Accessories

▼ Belt Clip



▼ USB Cable




← Lithium Ion Battery Pack

NO.	Description
1	LED Indicator
2	Navigation Key
3	Soft Key (K1~K4)
4	Back Key (F2)
5	Home Key (F1)
6	Speaker
7	Microphone
8	Receive Antenna
9	Channel Knob
10	Play Key
11	Power on/off & Volume Knob
12	Reset Key
13	Function Status on/off Key (S1)
14	Mini USB Port
15	Belt Clip
16	Battery Cover

Part B. Pager Overview

B2. LCD Display

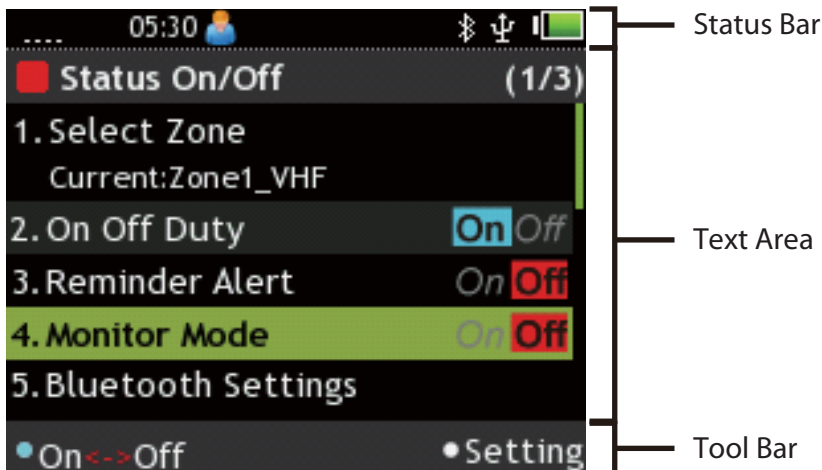

B3. LCD Introduction



Power LED:

NO.	Entity Key	Description
1	Blue	<ul style="list-style-type: none"> Power on process USB cable is connected to G4 and charging is completed.
2	Flash Blue	<ul style="list-style-type: none"> Charging

Message LED:

NO.	Entity Key	Description
1	Red	<ul style="list-style-type: none"> Receiving voice call or data call

Part B. Pager Overview

B4. Icon Introduction

Status Bar Icon


NO.	Item	Icon	Description
1	RF Strength		RF signal strength.
2	Out of Range		Signal is out of range.
3	Message Hint		Unread message icon indication.
4	Time Display	18:30	Time display (24 hour clock).
5	Off Duty Status		Off duty status.
6	On Duty Status		On duty status.
7	Bluetooth		Bluetooth is activated.
8	Bluetooth Headset		Bluetooth earphone is connected.
9	USB cable		USB cable is connected.
10	Trunking Status		Trunking registered.
			Trunking scanning.
11	Clock Alarm		Clock alarm is activated.
12	Battery Status		<p>The battery gauge indicator is located on the status bar and keeps you informed of the battery energy level. The five indicators are: 100%, 75%, 50%, less 0% (flashing battery icon).</p>

Part C. Operation Introduction

C1. Initial Use

Install Battery


- 1 Turn the screws and remove the battery cover.
- 2 Insert the battery pack into G4.
- 3 Replace the battery cover and and tighten the screws.

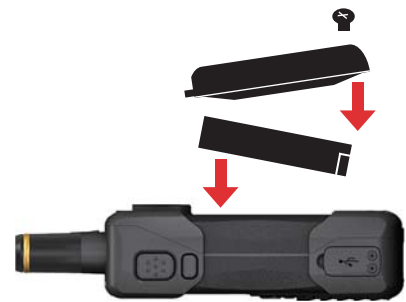

Insert the battery so that the connector pins align with battery contacts of the G4.

Battery Charging

G4 has its own customized lithium Ion battery, it can be charged by mini USB cable.

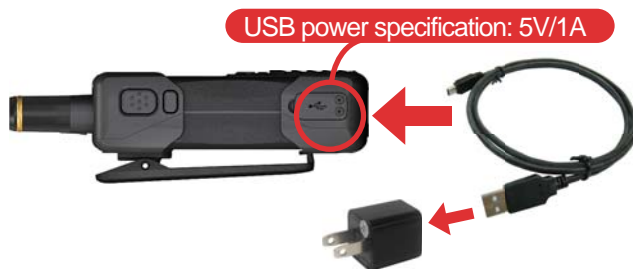


Power On

After the battery installed , turn the volume knob clockwise to turn on G4. You will hear “click” sound and see the word of “Loading” on the display.




Standby Screen

On the standby screen, G4 displays information on the current receiving mode.

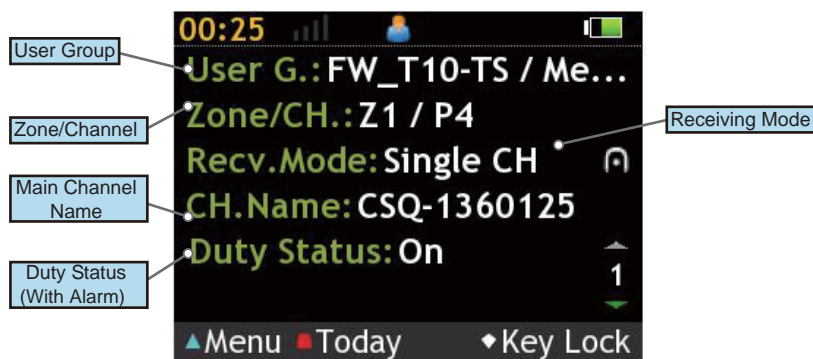


Receive Message

G4 displays the information of the incoming call when receives a message.

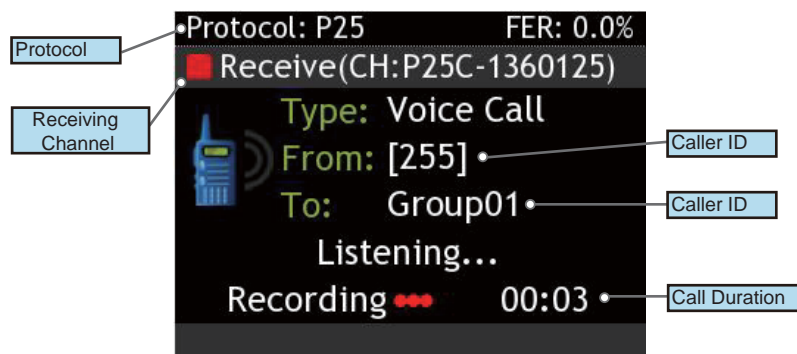

Main Menu

1. In Standby Mode, press the “K1” soft key to enter the Main Menu.
2. Press the “Home” key to go back to Standby Mode.

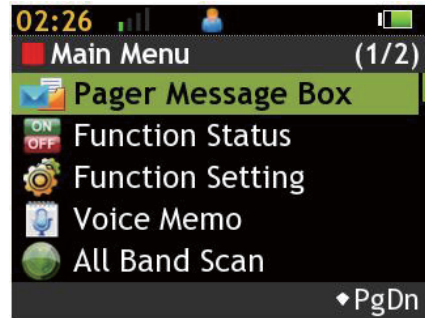

C2. Pager Message Box

- View and Manage Text Message Records in Message Box.

1. Enter Message Box:

Use the Navigation Key to select Message Box in the Main Menu.




2. Operation:

- A. Use the Navigation Key to select Message.
- B. Press the "K1" Key to read highlighted message.
- C. Press the “K2” Key to lock/unlock highlighted message. A lock icon shows on a locked message.
- D. Press the “K3” Key to delete highlighted message.
- E. Press the “K4” to delete all messages.

3. Read Message:

- A. Use the Navigation Key to scroll the message.
- B. Press the “K1” Key to lock/unlock the message.

Note: A locked item cannot be deleted.

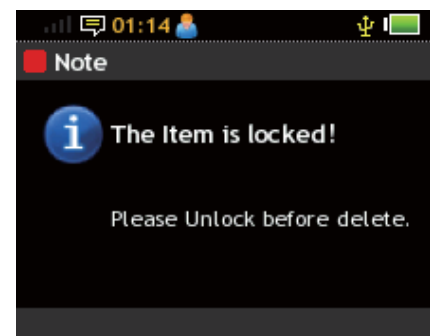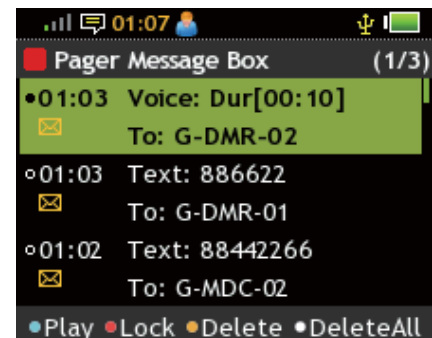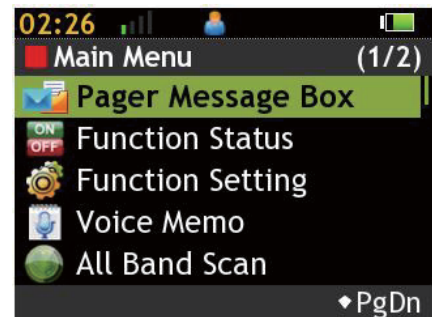


C3. Function status

- **Enter Function Status:**

Use the Navigation key to select Function Status in the Main Menu.


- **Basic Operation:**

Use the Navigation Key to select features to set.

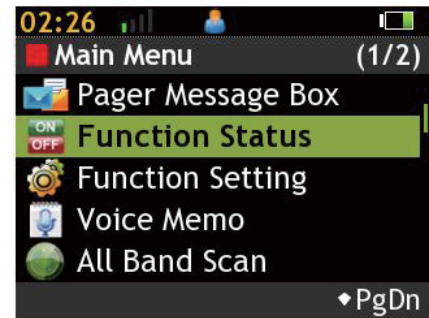


1. **Select Zone:**

Press the "K1" Key to enter setting screen. Use the Navigation Key to select Zone and then press the "K1" Key to confirm. Press the "K2" Key to save. You can press the "K4" Key to check detailed information of highlighted Zone.

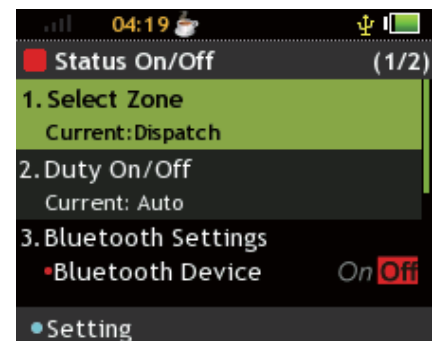

2. **On Off Duty:**

Press the "K1" Key to enable or disable the feature. If On Off Duty is disabled, the speaker is muted when receiving messages.

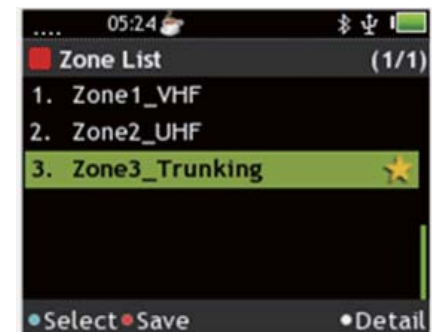

3. Bluetooth:

Bluetooth Device: Press the "K1" Key to enable or disable the feature.





Connect Bluetooth Earphone: Press the "K1" Key to start searching for the Bluetooth Earphone devices.

Connect another Bluetooth Device: Press the "K1" Key to start searching for Bluetooth devices other than earphone.

If only a Bluetooth device is found, the G4 starts pairing to the device. The G4 shows the pairing status on the screen.

If there are 2 or more devices, use the Navigation Key to select device and press the "K1" Key to start pairing.

Press the "K1" Key to stop Bluetooth pairing.

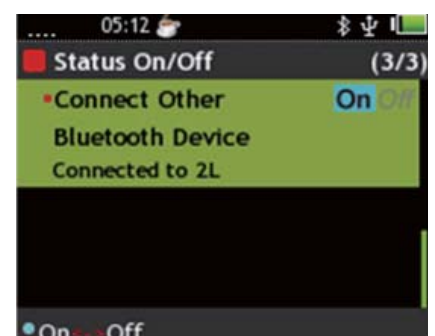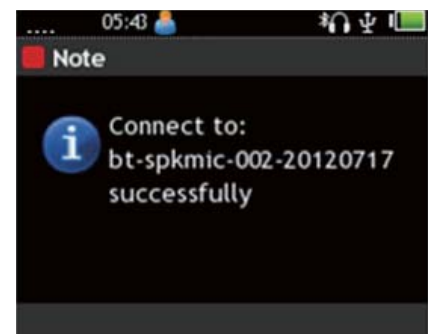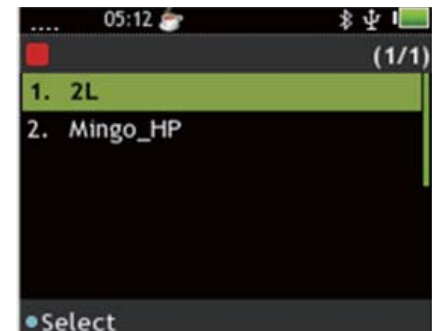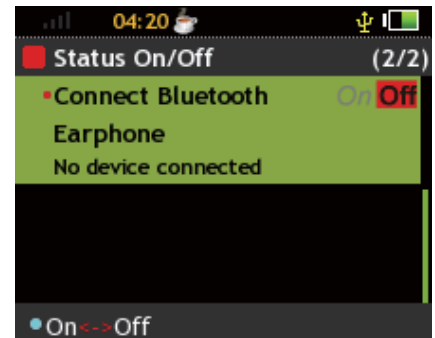

C4. Voice Memo Box

- View and Manage Voice Memo in Voice Memo Box.

1. Enter Voice Record Box:

Use the Navigation Key to select the Voice Memo Box in the Main Menu.

2. Record a New Voice Memo:

If there is no voice memo, press the “K1” Key to start recording.

- A. Press the “K1” Key to pause.
- B. Press the “K4” Key to save the voice memo.
- C. Press the “K1” Key to set the voice memo as Alarm.
- D. Press the “F2” Key to back to Voice Memo box.

3. Voice Memo:

View and manage the voice memos.

Features page 1:




- A. Press the “K1” Key to play highlighted voice memo.
- B. Press the “K2” Key to set highlighted voice memo as Alarm.
- C. Press the “K3” Key to record a new voice memo.
- D. Press the “K4” Key to switch to features page 2.

Features page 2:

- E. Press the “K1” Key to lock/unlock the highlighted item.
- F. Press the “K2” Key to delete the highlighted item.
- G. Press the “K4” Key to switch to features page 1.

4. Set Alarm:

- A. Use the Navigation Key to move.
- B. Press the “K1” Key to make highlighted value +5.
- C. Press the “K2” Key to make highlighted value +1.
- D. Press the “K3” Key to make highlighted value -1.
- E. Press the “K4” Key to save.

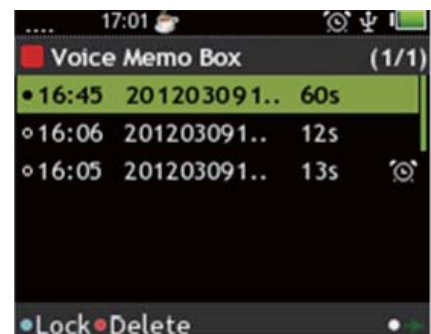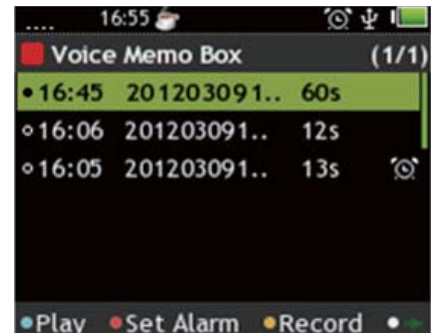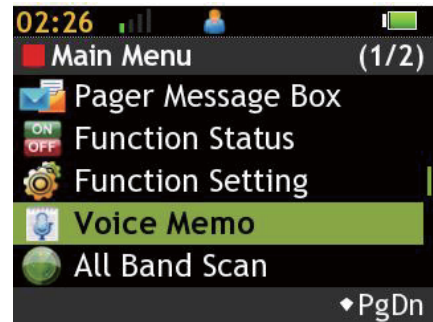


C5. All Band Scan

- Set a range to scan, or view the scanned channel list.

1. Enter Voice Record Box:


- A. Use the Navigation Key to select All Band Scan in the Main Menu.
- B. Use the Navigation Key to select a feature, and press the “K1” key to enter.
- C. Press the “K1” Key to set the voice memo as Alarm.
- D. Press the “F2” Key to back to Voice Memo box.

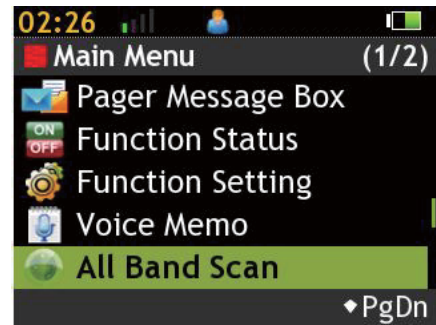

2. Start a New Scan:

Set scan range, band and frequency step.


- A. Use the Navigation Key to move.
- B. Press the “K1” Key to set the highlighted item.
Use the Navigation Key to adjust numeric value.
- C. Press the “K4” Key to start scanning.
- D. Press the “K1” Key to stop scanning.

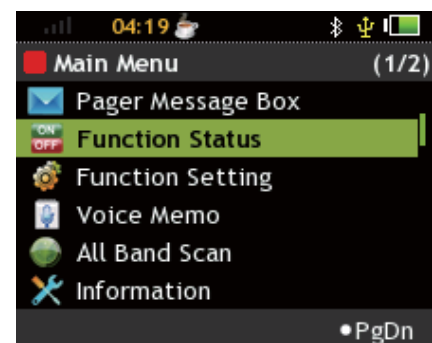

3. Active Frequency List:

View and manage scanned channel list.

- A. Use the Navigation Key to move.
- B. Press the “K1” Key to monitor the highlighted channel.
- C. Press the “K2” Key to lock the highlighted channel.
- D. Press the “K3” Key to delete the highlighted channel.
- E. Press the “K4” to delete all scanned channels.

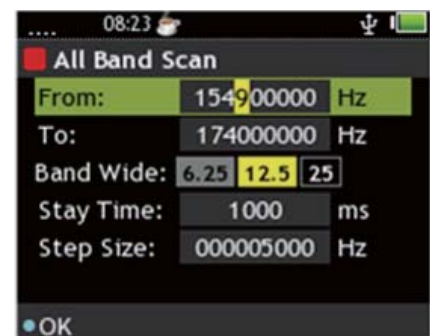

C6. Function Setting

- View and manage pager basic function.
 - Enter Function Status:
Use the Navigation Key to select Function Setting in the Main Menu.
 - Basic Operation:
Use the Navigation Key to select function.
Press “K1” Key to start setting.

1. Zone:

Please refer C2-1 to get detailed information.

2. Alert Tone Volume:





Use the “K1” Key to adjust the pager tone volume.

- A. Operation Allowed: Operation succeeded.
- B. Operation Succeed: Message received.
- C. Operation Failed: Message receiving failed.
- D. Message Arrived: Text message received.
- E. Alarm: Alarm volume

3. Backlight Mode&Level:

Use the “K1” Key to adjust backlight mode.


- A. Mode: Select the backlight mode. There are 2 modes: “Manual” or “Auto”.
- B. Manual: Night is low level, Day is medium and Glare is high level of backlight.

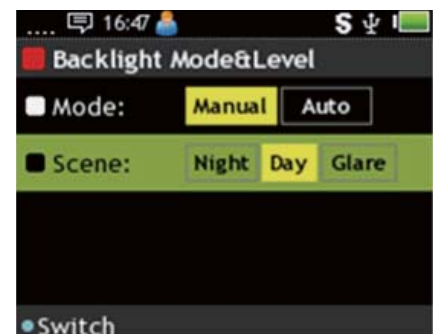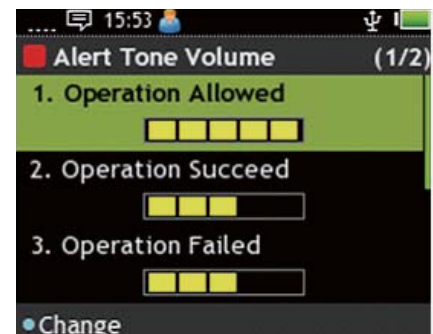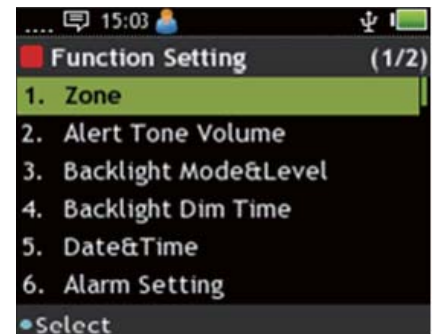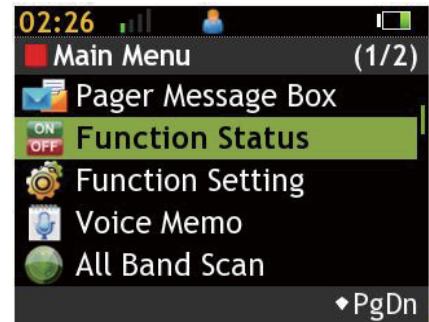

4. Backlight Dim Time:

Adjust screen backlight dim time.


- A. Use the Navigation Key to move.
- B. Press the “K1” Key to make highlighted value +5.
- C. Press the “K2” Key to make highlighted value +1.
- D. Press the “K3” Key to make highlighted value -1.
- E. Press the “K4” Key to save.

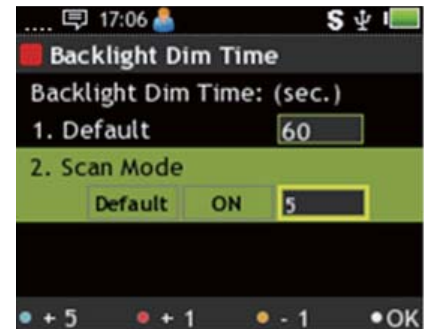

5. Date & Time:

Adjust Time of pager.

- A. Use the Navigation Key to move.
- B. Press the “K1” Key to make highlighted value +5.
- C. Press the “K2” Key to make highlighted value +1.
- D. Press the “K3” Key to make highlighted value -1.
- E. Press the “K4” Key to save.

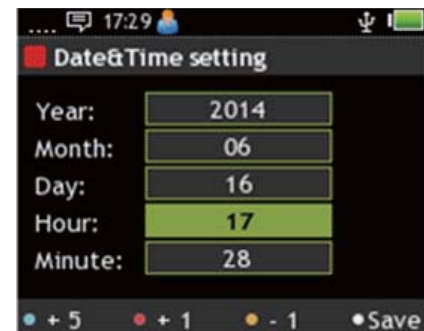


6. Alarm Setting:

Set up to 2 sets of Alarm.

- A. Use the Navigation Key to move.
- B. Press the “K1” Key to activate the Alarm.
- C. Press the “K4” Key to set.

Alarm setting:

- A. Use the Navigation Key to move.
- B. Press the “K1” Key to make highlighted value +5.
- C. Press the “K2” Key to make highlighted value +1.
- D. Press the “K3” Key to make highlighted value -1.
- E. Press the “K4” Key to save.

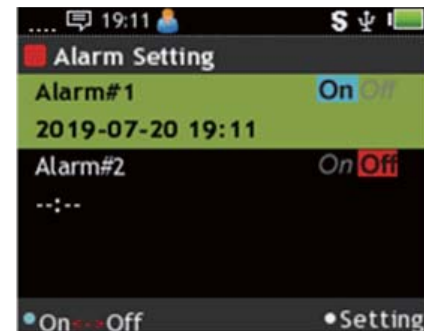

7. Monitor Mode:

Please refer to C2-4 for more detailed information.



8. Ring Mode:

Select Ring mode.

There are 5 modes:

- Tone: Tone only.
- Vibrate: Vibrate only.
- Silent: Mute mode.
- Vibrate then tone: Vibrate first then tone.
- Tone and Vibrate: Both.

A. Use the Navigation Key to move.

B. Press the “K1” Key to select.

C. Press the “K4” Key to save.



C7. Information

- View the Pager information.



1. Enter Information:

Use the Navigation Key to select Information in the Main Menu.

2. Read:

Language: Display language

- Language: Display language
- Version: Firmware version.
- SDRAM: SDRAM size.
- Protocol Model: Device model type.

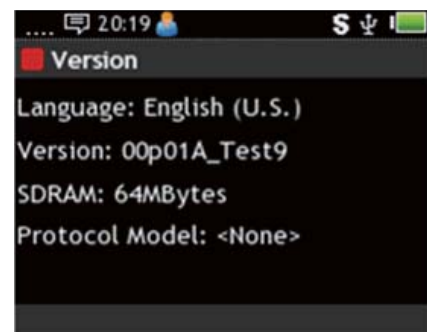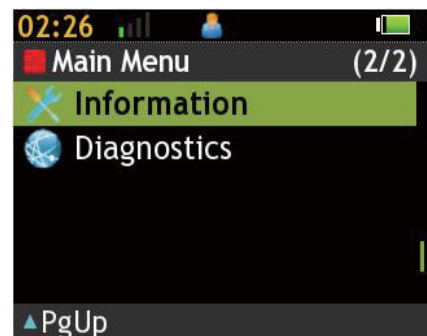

C8. Diagnostic



- View the radio signal strength.

1. Enter Message Box:

Use the Navigation Key to select Message Box in the Main Menu.

2. Read Information:

- A. Rpt Name: Name of repeater
- B. RSSI(dBm): Radio Signal Strength Indicator.
- C. Protocol: Using Protocol of current channel.
- D. Frame Error: Received signal error ratio.
- E. Others: Refer to channel setting.

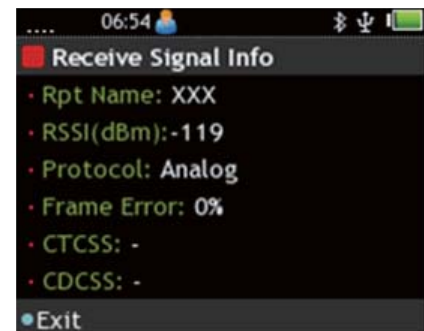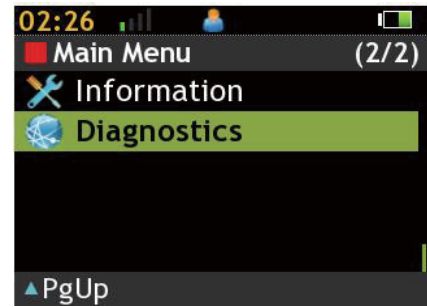

Part D. Warning and Important Notes

Notice :

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Important Note :

To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IC Note :

The term "IC:" before the radio certification number only signifies that Industry Canada Technical specifications were met.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Antenna :

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that required for successful communication.

This device has been designed to operate with an antenna having a maximum gain of -2 dBi. Antenna having a higher gain is strictly prohibited per regulations of Industry Canada. The required antenna impedance is 50 ohms.