




Video Solutions for Security Professionals™

Q1/Q2 2018 Effective January 26 2018

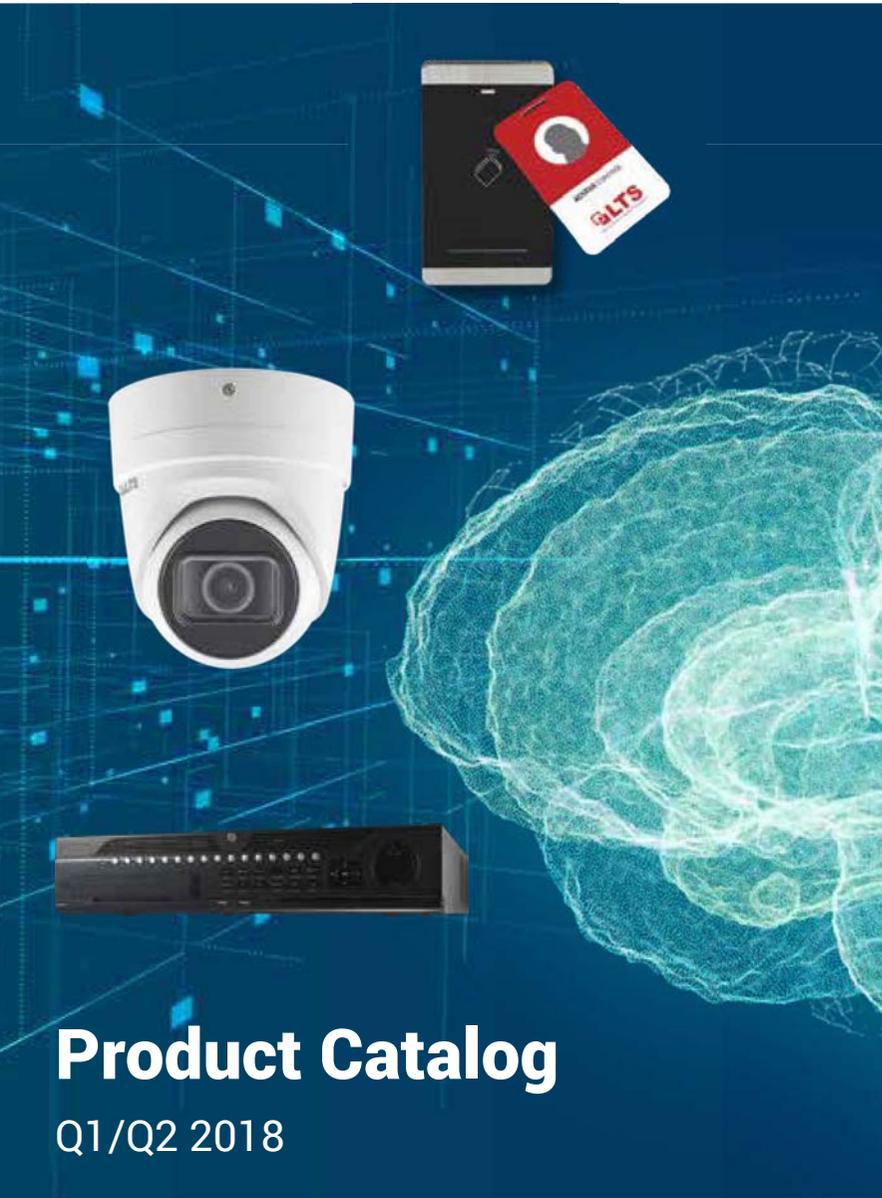

BIG DATA  
SMART  
AUTOMATION  
IOT  
ARTIFICIAL  
INTELLIGENCE  
NEURAL NETWORK

# Product Catalog

Q1/Q2 2018



IP Solutions  
Pg.2 - Pg.18



HD-TVI Solutions  
Pg.19- Pg.29



Access Control  
Pg. 30 - Pg. 31



Accessories  
Pg. 32 - Pg. 37



Partners  
Pg. 38 - Pg. 43

LTS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. LTS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective until August 1, 2018. LTS offers a 3 year warranty on Platinum products unless otherwise specified. © 2018 LTS.



## What's New LTS Platinum Network Video Recorder

- Industry leading H.265/H.265+ video compression technology saves both bandwidth and storage
- PT Cloud platform delivers the easiest and most secure way for remote access
- Built-in Cloud-based upgrade provides reliable system upgrade solution
- 4K Ultra HD resolution displays the most detailed picture quality for live view / playback
- Plug&Play with built-in PoE

### Professional Level

Image

A | B | Mini 1U Case

C | D | E | F | Compact 1U Case



	A	B <b>NEW</b>	C <b>NEW</b>	D	E <b>NEW</b>	F
Model Number	LTN8704-P4	LTN8704Q-P4	LTN8708Q-P8	LTN8708K-P8	LTN8716Q-P16	LTN8716K-P16
Price						
Video Input	4CH IP@40Mbps		8CH IP@80Mbps		16CH IP@160Mbps	
Record	2MP	4CH@30fps/CH		8CH@30fps/CH		16CH@30fps/CH
	4MP	4CH@20fps/CH		8CH@20fps/CH	8CH@30fps/CH	16CH@20fps/CH
	8MP	-	4CH@15fps/CH	8CH@15fps/CH	8CH@20fps/CH	16CH@15fps/CH
Video Output	HDMI / VGA up to 1080P		HDMI up to 4K / VGA up to 1080P		HDMI up to 4K / VGA up to 1080P	
Recording Resolution	Up to 5 MegaPixels (2560x1920)		Up to 4K, 8 MegaPixels (3840x2160)			
Decoding Format	H.264/H.264+		H.265/H.265+/H.264/H.264+			
Decoding Capability	4CH@1080P		1CH@4K / 4CH@1080P		2CH@4K / 8CH@1080P	
Playback Resolution	Up to 5 MegaPixels (2560x1920)		Up to 4K, 8 MegaPixels (3840x2160)			
Audio In/Out	1CH/1CH, RCA					
Alarm In/Out	-		4/1		-	
Built-in PoE	4CH		8CH		16CH	
Network	10/100/1000M, 1 RJ45					
Storage	1 SATA up to 6TB, NAS, IP SAN			2 SATA up to 12TB, NAS, IP SAN		
Support Fisheye Camera#	-					
Support POS#	1 (TCP)		-			
Dimensions	12.4"(W)x9.1"(D)x1.8"(H)			15"(W)x12.4"(D)x1.8"(H)		
Backup	1 USB 2.0, 1 USB 3.0		2 USB 2.0		1 USB 2.0, 1 USB 3.0	



# What's More

## Enterprise Level NVR System

- **Faster:** Quad-Core CPU, the most powerful system
- **More Channel:** Up to 256 IP camera input
- **More space:** Up to 128TB hard drive, support industry standard NAS/eSATA
- **More reliable:** N+1 technology
- **More detail:** 4K IP camera input/output
- **More secure:** fortified by strong password
- **More features:** Integrate with LTS access control/doorbell system



Image



		Enterprise Level											
		G   H   Compact 1 U Case		I   J   K   L   1.5U Case									
				4K H.265+		4K H.265+							
				4K H.265+		4K H.265+							
				4K H.265+		4K H.265+							
				4K H.265+		4K H.265+							
				4K H.265+		4K H.265+							
Model Number		<b>LTN8608-P8</b>		<b>LTN8616-P16</b>		<b>LTN8916</b>		<b>LTN8916-P16</b>		<b>LTN8932</b>		<b>LTN8932-P16</b>	
Price													
Video Input		8CH IP@80Mbps		16CH IP@160Mbps				32CH IP@256Mbps					
Record	2MP	8CH@30fps/CH		16CH@30fps/CH				32CH@30fps/CH					
	4MP	8CH@30fps/CH		16CH@30fps/CH				32CH@30fps/CH					
	8MP	8CH@20fps/CH		16CH@20fps/CH				32CH@20fps/CH					
Video Output		HDMI up to 4K(3840x2160), VGA up to 1920x1080P, CVBS up to 704x480											
Recording Resolution		Up to 12 MegaPixels (4000x3072)											
Decoding Format		H.265/H.265+/H.264/H.264+											
Decoding Capability		2CH@4K / 8CH@1080P		4CH@4K / 16CH@1080P									
Playback Resolution		Up to 12 MegaPixels (4000x3072)											
Audio In/Out		1CH/1CH, RCA											
Alarm In/Out		4/1			16/4								
Built-in PoE		8CH		16CH		-		16CH		-		16CH	
Network		10/100/1000M, 1 RJ45		10/100/1000M, 2 RJ45		10/100/1000M, 1 RJ45		10/100/1000M, 2 RJ45		10/100/1000M, 1 RJ45			
Storage		2 SATA up to 16TB, NAS, IP SAN		4 SATA up to 32TB, eSATA, NAS, IP SAN									
Support Fisheye Camera#		6		8									
Support POS#		4 (TCP)		4 (TCP or RS232)				8 (TCP or RS232)					
Dimensions		15"(W)x12.4"(D)x1.8"(H)		17.5"(W)x15.3"(D)x2.8"(H)									
Backup		1 USB 2.0, 1 USB 3.0		2 USB 2.0, 1 USB 3.0, eSATA, DVD-RW									



## AI Deep learning is Here

### Introducing LTN0732D-R8, Industry Most Advanced NVR with AI Technology

#### Revolutionary Video Analytics:

1. Accurate detection of human body, over 100x more accurate than simple motion detection
2. Smart and Efficient video search, saving hours on searching playback footages

Available in select model LTN0732D-R8

#### Enterprise Level



A | B | 2U Case

C | 2U Case

D | 3U Case



A



B

C



D

Image		Enterprise Level			
		A	B	C	D
Model Number		<b>LTN8932-R</b>	<b>LTN8964-R</b>	<b>LTN0732D-R8</b>	<b>LTN07256-R16</b>
Price					
Video Input		32CH IP@320Mbps	64CH IP@320Mbps	32CH IP@256Mbps	256CH IP@768Mbps
Record	2MP	32CH@30fps/CH	64CH@30fps/CH	32CH@30fps/CH	256CH@15fps
	4MP	32CH@30fps/CH	64CH@20fps/CH	32CH@30fps/CH	256CH@10fps
	8MP	32CH@20fps/CH	64CH@15fps/CH	32CH@15fps/CH	256CH@4fps
Video Output		HDMI1 up to 4K(3840x2160)/VGA1 up to 2K(2560x1440), HDMI2/VGA2 up to 1920x1080P		HDMI1 up to 4K(3840x2160)/VGA1 up to 2K(2560x1440), HDMI2/VGA2 up to 1920x1080P	
Recording Resolution		Up to 12 MegaPixels (4000x3072)			
Decoding Format		H.265/H.265+/H.264/H.264+			
Decoding Capability		4CH@4K / 16CH@1080P		2CH@4K / 8CH@1080P	
Playback Resolution		Up to 12 MegaPixels (4000x3072)			
Audio In/Out		1CH/2CH, RCA			1CH/1CH, RCA
Alarm In/Out		16/4			16/8
Built-in PoE		-			
Network		10/100/1000M, 2 RJ45			10/100/1000M, 4 RJ45, 4 Fiber Optic
Storage		8 SATA up to 64TB, eSATA, NAS, IP SAN RAID 0, 1, 5, 6, and 10, Hot Swap			16 SATA up to 128TB, NAS, IPSAN RAID 0, 1, 5, 6 and 10, Hot Swap
Support Fisheye Camera#		8			16
Support POS#		8 (TCP or RS232)			16 (TCP)
Dimensions		17.5"(W)x18.5"(D)x3.5"(H)			17.5" (W)x19.4"(D)x 5.7"(H)
Backup		2 USB 2.0, 1 USB 3.0, eSATA			2 USB 2.0, 2 USB 3.0



# Cyber Security You're in Control

## We'll Take You Further LTS best practices in Cyber Security

- We Use**
- PT Cloud
  - HTTPS
  - PCI DSS Compliance

- We Don't Recommend**
- UPnP
  - Telnet
  - SSH

- You're in Control**
- Free DDNS
  - ONVIF
  - RTSP
  - ISAPI

		Hybrid and Wi-Fi Solutions			
Image					
		E	F	G	H
Model Number		<b>LTN8704T-HT</b>	<b>LTN8708T-HT</b>	<b>LTN8716T-HT</b>	<b>LTN8208-W</b>
Price					
Video Input		4CH IP(40Mbps) + 4CH TVI3.0	8CH IP(80Mbps) + 8CH TVI3.0	16CH IP(72Mbps) + 16CH TVI3.0	8CH IP@50Mbps
Record	2MP	4CH IP@30fps + 4CH TVI 3MP@15fps	8CH IP@30fps + 8CH TVI 3MP@15fps	16CH IP@30fps + 16CH TVI 3MP@15fps	8CH@25fps/CH
	4MP	4CH IP@20fps + 4CH TVI 3MP@15fps	8CH IP@20fps + 8CH TVI 3MP@15fps	16CH IP@15fps + 16CH TVI 3MP@15fps	8CH@15fps/CH
	5MP	4CH IP@15fps + 4CH TVI 3MP@15fps	8CH IP@15fps + 8CH TVI 3MP@15fps	16CH IP@10fps + 16CH TVI 3MP@15fps	-
Video Output		VGA/ HDMI up to 1920x1080P, CVBS up to 704x480			HDMI up to 1920x1080P
Recording Resolution		Up to 5 MegaPixels (2560x1920)			Up to 3 MegaPixels (2048x1536)
Decoding Format		H.264/H.264+			H.264
Decoding Capability		4CH	8CH	16CH	8CH
Playback Resolution		Up to 5 MegaPixels (2560x1920)			Up to 3 MegaPixels (2048x1536)
Audio In/Out		4CH/1CH, RCA			-
Alarm In/Out		4CH/1CH	8CH/4CH	16CH/4CH	-
Network		10/100/1000M, 1 RJ45			1x 10/100M WAN, 3x 10/100M LAN Wifi 802.11n 300Mbps, 2x2 MIMO
Storage		1 SATA up to 6TB, NAS, IP SAN	2 SATA up to 12TB, NAS, IP SAN		1TB 2.5"HDD (Included), NAS, IP SAN
Support Fisheye Camera#		-			-
Support POS#		1 (TCP)	2 (TCP)		-
Dimensions		12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)		3.4 "(W)x3.4"(D) x6.2"(H)
Backup		2 USB 2.0	1 USB 2.0, 1 USB 3.0		1 USB 3.0




## What's New LTS Platinum IP Cameras

- H.265/H.265+ Smart Codec Technology: Maximize bandwidth savings while maintaining high-quality imaging up to 4K
- Built-in Micro SD Slot up to 128GB for ANR to avoid critical data loss
- Matrix IR LED lights capture more night details by minimizing halo effects with higher luminous efficiency and longer lifespan.
- Full product lineup from 2MP to 4K resolution

### IP Turret Camera

#### Dimensions

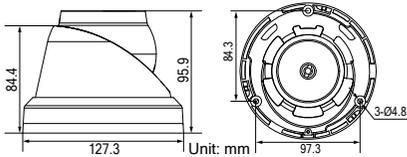

#### Key Features

- Advanced Compression H.265 / H.265+
- Matrix IR LED up to 100ft
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67
- 3D DNR, BLC
- DC 12V, PoE, UL Listed

<b>CMIP3382W-28M</b>	<b>CMIP3382NW-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP3382NW-M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP3362W-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP3362W-M</b> <span style="color: blue; font-weight: bold;">NEW</span>	
<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 2.8mm Fixed Lens</li> <li>• 3840 × 2160@20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 2.8mm Fixed Lens</li> <li>• 3840 × 2160@15fps</li> </ul>	<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 4mm Fixed Lens</li> <li>• 3840 × 2160@15fps</li> </ul>	<ul style="list-style-type: none"> <li>• 6MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 3072 × 2048@20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 6MP</li> <li>• 4mm Fixed Lens</li> <li>• 3072 × 2048@20fps</li> </ul>	
<b>CMIP3352W-28</b>	<b>CMIP3342W-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP3342W-M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP3322W-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP3322W-M</b> <span style="color: blue; font-weight: bold;">NEW</span>	
<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2560 × 1920 @20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 × 1520@30fps</li> <li>• 0.018 Lux @ F1.6</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 × 1520@30fps</li> <li>• 0.018 Lux @ F1.6</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 1920 × 1080@30fps</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 × 1080@30fps</li> </ul>	
<b>LTB03-W</b>	<b>LTB307</b>	<b>LTB301</b>	<b>LTB371</b>	<b>LTB378</b>	<b>LTB379</b>
Junction box	Junction Box	Wall mount	Pendant mount	Vertical pole mount	Corner mount




## What's More Intelligent Features

1. Video Content Analytics
  - Intrusion Detection
  - Line Crossing Detection
  - Face Detection
2. Built-in junction box for cable management
3. Easy to install with mounting plate
4. 3.5mm Audio Jack I/O



IP Turret Camera

### Dimensions

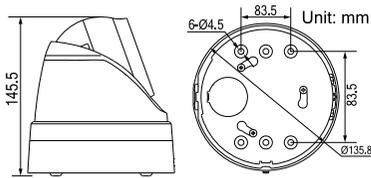

### Key Features

- Advanced Compression H.265/ H.265+
- Matrix IR LED up to 100ft
- Motorized Lens with Smart Focus
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- 3.5mm Audio Jack I/O, Alarm I/O
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67, IK10 Vandal Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Junction Box included

4K

CMIP3883W-SZ

- 8MP/4K
- 2.8 - 12 mm VF Motorized Lens
- 3840 × 2160@20fps
- 0.014 Lux @ F1.4

4K

CMIP3883NW-SZ **NEW**

- 8MP/4K
- 2.8 - 12 mm VF Motorized Lens
- 3840 × 2160@15fps
- 0.018 Lux @ F1.6

4K

CMIP3863W-SZ **NEW**

- 6MP
- 2.8 - 12 mm VF Motorized Lens
- 3072 × 2048@20fps
- 0.018 Lux @ F1.6

CMIP3853W-SZ

- 5MP
- 2.8 - 12 mm VF Motorized Lens
- 2944 × 1656@20fps
- 0.014 Lux @ F1.4

LTB344-135 **NEW**



Wall Mount

LTB388 **NEW**



Vertical pole mount


LTB389 **NEW**



Corner mount

## IP Dome Camera

### Dimensions



### Key Features


- Advanced Compression H.265/ H.265+
- Matrix IR LED up to 100ft
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67, IK10 Vandal Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed

<b>CMIP7382W-28M</b>	<b>CMIP7382NW-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7382NW-M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7362W-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7362W-M</b> <span style="color: blue; font-weight: bold;">NEW</span>
<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 2.8mm Fixed Lens</li> <li>• 3840 × 2160@20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 2.8mm Fixed Lens</li> <li>• 3840 × 2160@15fps</li> </ul>	<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 4mm Fixed Lens</li> <li>• 3840 × 2160@15fps</li> </ul>	<ul style="list-style-type: none"> <li>• 6MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 3072 × 2048@20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 6MP</li> <li>• 4mm Fixed Lens</li> <li>• 3072 × 2048@20fps</li> </ul>
<b>CMIP7352W-28</b>	<b>CMIP7352W</b>	<b>CMIP7342W-28M</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7342W-M</b> <span style="color: blue; font-weight: bold;">NEW</span>	
<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2944 × 1656@20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 4mm Fixed Lens</li> <li>• 2944 × 1656@20fps</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 × 1520@30fps</li> <li>• 0.018 Lux @ F1.6</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 × 1520@30fps</li> <li>• 0.018 Lux @ F1.6</li> </ul>	

<b>LTB347</b>	<b>LTB349</b>	<b>LTB348</b>	<b>LTB376</b>	<b>LTB342-110</b>	<b>LTB378</b>	<b>LTB379</b>
Junction box	Inclined ceiling mount	Wall Mount	Pendant mount	Wall mount	Vertical pole mount	Corner mount

## IP Dome Camera

### Dimensions

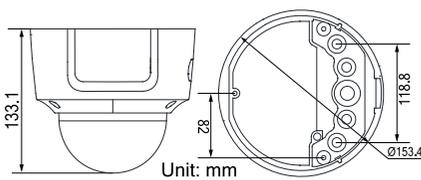

### Key Features

- Advanced Compression H.265/ H.265+
- Matrix IR LED up to 100ft
- Motorized Lens with Smart Focus
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- 3.5mm Audio Jack I/O, Alarm I/O
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67, IK10 Vandal Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Junction Box included

<b>CMIP7883W-SZ</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7883NW-SZ</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7863W-SZ</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMIP7853W-SZ</b>
<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 2.8 - 12 mm VF Motorized Lens</li> <li>• 3840 × 2160@20fps</li> <li>• 0.014 Lux @ F1.4</li> </ul>	<ul style="list-style-type: none"> <li>• 8MP/4K</li> <li>• 2.8 - 12 mm VF Motorized Lens</li> <li>• 3840 × 2160@15fps</li> <li>• 0.018 Lux @ F1.6</li> </ul>	<ul style="list-style-type: none"> <li>• 6MP</li> <li>• 2.8 - 12 mm VF Motorized Lens</li> <li>• 3072 × 2048@20fps</li> <li>• 0.018 Lux @ F1.6</li> </ul>	<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 2.8 - 12 mm VF Motorized Lens</li> <li>• 2944 × 1656@20fps</li> <li>• 0.014 Lux @ F1.4</li> </ul>

<b>LTB781</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>LTB342-155</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>LTB388</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>LTB389</b> <span style="color: blue; font-weight: bold;">NEW</span>
Pendant mount	Wall mount	Vertical pole mount	Corner mount



## IP Turret Camera

### Key Features

- Advanced Compression H.265/ H.265+
- IR LED up to 100ft
- IP67
- DWDR
- 3D DNR, BLC
- DC 12V, PoE
- Metal Housing




**CMIP1042-28**



- 4MP
- 2.8mm Fixed Lens
- 1/3" CMOS
- 2560 × 1440@20fps

### Dimensions

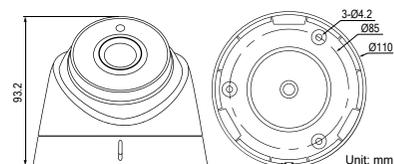

LTB03-W	LTB307	LTB301	LTB378	LTB379
Junction Box	Junction Box	Wall Mount	Pole Mount	Corner Mount

## IP Dome Camera

### Key Features

- Advanced Compression H.265/ H.265+
- IR LED up to 100ft
- IP67, IK10 Vandal-Proof
- DWDR
- 3D DNR, BLC
- DC 12V, PoE
- Metal Housing
- 2-Axis




**CMIP7042-28**



- 4MP
- 2.8mm Fixed Lens
- 1/3" CMOS
- 2560 × 1440@20fps

### Dimensions

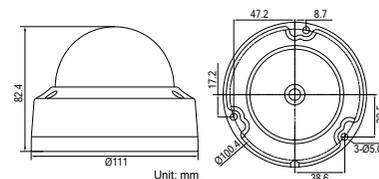

LTB347	LTB349	LTB348	LTB342-110	LTB376	LTB378	LTB379
Junction Box	Ceiling Mount	Wall Mount	Wall Mount	Pendant Mount	Pole Mount	Corner Mount

## IP Bullet Camera

### Key Features

- Advanced Compression H.265/ H.265+
- IR LED up to 100ft
- IP67
- DWDR
- 3D DNR, BLC
- DC 12V, PoE
- Metal Housing



**CMIP8022-28**




**CMIP8042-28**



- 2MP
- 2.8mm Fixed Lens
- 1/2.8" CMOS
- 1920×1080@30fps
- DWDR

- 4MP
- 2.8mm Fixed Lens
- 1/3" CMOS
- 2560×1440@20fps
- DWDR

### Dimensions



LTB345
Universal Junction Box

IP Turret Camera

Key Features


- Varifocal Motorized Lens
- Support H.264 Zip+, H.264
- IR LED up to 100ft
- IP67
- True WDR 120dB
- 3D DNR, BLC
- DC 12V, PoE
- Metal Housing



CMIP1043W-MZ **NEW**

- 4MP
- 2.8 - 12 mm VF Motorized Lens
- 1/3" CMOS
- 2688 × 1520@20fps

Dimensions

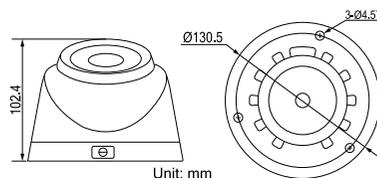

LTB307	LTB301	LTB378	LTB379
Junction Box	Wall Mount	Pole Mount	Corner Mount

IP Dome Camera

Key Features


- Advanced Compression H.265/ H.265+
- Varifocal Motorized Lens
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IR LED up to 100ft
- IP67, IK10 Vandal-Proof
- True WDR 120dB
- 3D DNR, BLC
- DC 12V, PoE
- Metal Housing



CMIP7043W-MZ **NEW**

- 4MP
- 2.8 - 12 mm VF Motorized Lens
- 1/3" CMOS
- 2560 × 1440@20fps

Dimensions

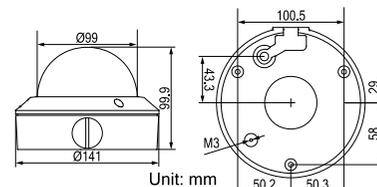

LTB701 <b>NEW</b>	LTB342-135	LTB342-135B	LTB381 <b>NEW</b>	LTB378	LTB379
Junction Box	Wall Mount	Wall Mount	Pendant mount	Pole Mount	Corner Mount

IP Bullet Camera

Key Features


- Advanced Compression H.265/ H.265+
- Varifocal Motorized Lens
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- IR LEDs up to 100ft
- IP67
- True WDR 120dB
- 3D DNR, BLC
- DC 12V, PoE
- Metal Housing



CMIP8043W-MZ **NEW**

- 4MP
- 2.8 - 12 mm VF Motorized Lens
- 1/3" CMOS
- 2560 × 1440@20fps

Dimensions

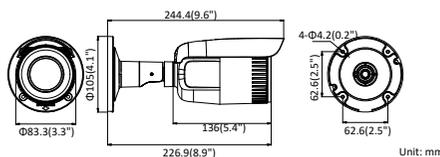

LTB801 <b>NEW</b>	LTB378	LTB379
Junction Box	Pole Mount	Corner Mount

# Video Doorbell

## Security Starts at Your Front Door


### Compatible to LTS NVR/DVR

The video doorbell lets you see, hear, and speak to visitors no matter where you are



 <b>LTK6128W-WIFI</b>
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 180° Panoramic View</li> <li>• 1920x1080P</li> <li>• IR up to 15ft</li> <li>• Two-Way Audio</li> <li>• 16VAC - 24VAC</li> <li>• Built-in Wi-Fi</li> <li>• DWDR, DNR</li> <li>• Micro SD Card up to 128GB</li> </ul>

LTSecurityinc.com/Doorbell

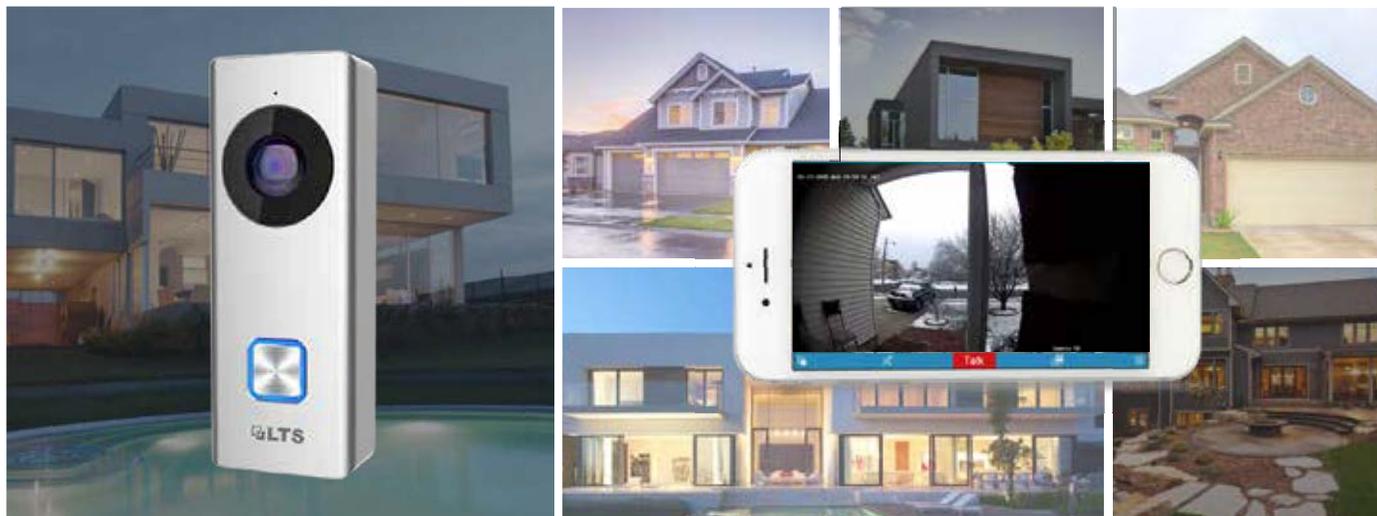


### IP Turret Camera

#### Key Features

- 2 - 4 Megapixel Resolution
- Support H.264 Zip+, H.264
- Matrix IR LED up to 100ft
- Video Content Analytics
- IP67
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



#### Dimensions

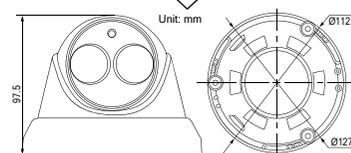

CMIP1122-28/ CMIP3022-28	CMIP1122/ CMIP3022	CMIP3022W-28	CMIP3022W	CMIP1142-28/ CMIP3042-28
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• DWDR</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• DWDR</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• True WDR 120dB</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• True WDR 120dB</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• DWDR</li> </ul>
CMIP1142/ CMIP3042	CMIP1142W-28/ CMIP3042W-28	CMIP1142W/ CMIP3042W	CMIP1142W-6/ CMIP3042W-6	
<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• DWDR</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 6mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> </ul>	

LTB03-W	LTB307	LTB301	LTB371	LTB378	LTB379
Junction Box	Junction Box	Wall Mount	Pendant Mount	Pole Mount	Corner Mount



**Key Features**

- 2 - 4 Megapixel Resolution
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3-Axis
- IP67, IK10 Vandal-Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed




\* Junction Box Sold Separately



IP Dome Camera

CMIP7422N-28WIFI		CMIP7442W-28WIFI		CMIP7422N-28M		CMIP7422-M	
• 2MP	• 12 IR up to 70ft	• 2.8mm Fixed Lens	• 1920 x 1080P@30fps	• DWDR	• Built-in Wi-Fi	• 4MP	• 30 IR up to 100ft
• 2.8mm Fixed Lens	• 1920 x 1080P@30fps	• DWDR	• Built-in Wi-Fi	• 2MP	• 12 IR up to 70ft	• 2.8mm Fixed Lens	• 4mm Fixed Lens
• 1920 x 1080P@30fps	• DWDR	• Built-in Wi-Fi		• 1920 x 1080P@30fps	• DWDR	• 1920 x 1080P@30fps	• DWDR
• DWDR	• Built-in Wi-Fi			• Special Design for Wide FoV			
CMIP7442-M		CMIP7442W-28M		CMIP7442WB-28M			
• 4MP	• 30 IR up to 100ft	• 4mm Fixed Lens	• 2688 x 1520P@20fps	• DWDR			
• 4MP	• 30 IR up to 100ft	• 2.8mm Fixed Lens	• 2688 x 1520P@20fps	• True WDR 120dB			
• 4mm Fixed Lens	• 2688 x 1520P@20fps	• True WDR 120dB		• 4MP	• 30 IR up to 100ft	• 2.8mm Fixed Lens	• 2688 x 1520P@20fps
• 2688 x 1520P@20fps	• DWDR			• 2.8mm Fixed Lens	• 2688 x 1520P@20fps	• True WDR 120dB	• Black Housing
• DWDR				• True WDR 120dB	• Black Housing		

Dimensions

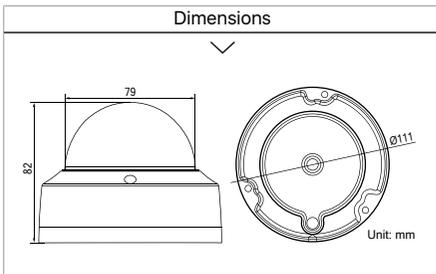

CMIP8942W-28WIFI

- 4MP
- Supports H.264/ H.264 ZIP+
- 2.8mm Fixed Lens
- 2688 x 1520P@20fps
- True WDR 120dB
- IR up to 33ft
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Alarm I/O
- Built-in Microphone & Speaker
- Indoor



LTB347/B	LTB349	LTB348 /B	LTB342-110	LTB376	LTB378	LTB379
Junction Box(White/Black)	Ceiling Mount	Wall Mount (White/Black)	Wall Mount	Pendant mount	Pole Mount	Corner Mount



# IP Cameras - Platinum Series


## IP Dome Camera

### Key Features

- 2 - 4 Megapixel Resolution
- Varifocal Lens
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- 24 IR up to 100ft
- Audio I/O, Alarm I/O
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3-Axis
- IP67, IK10 Vandal-Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



### Dimensions

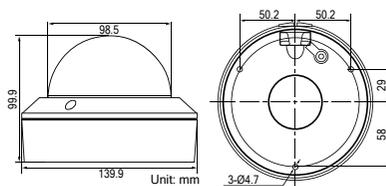

CMIP7223-SZ	CMIP7243-SZ	CMIP7243W-SZ
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8-12mm VF Motorized Lens</li> <li>• 1920x1080P@30fps</li> <li>• DWDR</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8-12mm VF Motorized Lens</li> <li>• 2688x1520P@20fps</li> <li>• DWDR</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8-12mm VF Motorized Lens</li> <li>• 2688x1520P@20fps</li> <li>• True WDR 120dB</li> </ul>

LTB342-135	LTB342-135B	LTB378	LTB379	LTB396
Wall Mount	Wall Mount with Junction Box	Pole Mount	Corner Mount	Pendant Mount


## IP Mini Bullet Camera

### Key Features

- 2 - 4 Megapixel Resolution
- Support H.264 Zip+, H.264
- 30 IR up to 100ft
- Video Content Analytics
- 3D DNR, BLC
- IP67
- DC 12V, PoE
- UL Listed



### Dimensions

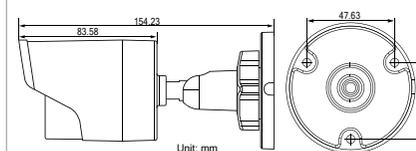


CMIP8222-WIFI	CMIP8222	CMIP8222B	CMIP8222W	CMIP8222WB
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• DWDR</li> <li>• Built-in Wi-Fi</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• DWDR</li> <li>• White Housing</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• DWDR</li> <li>• Black Housing</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• True WDR 120dB</li> <li>• White Housing</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 4mm Fixed Lens</li> <li>• 1920 x 1080P@30fps</li> <li>• True WDR 120dB</li> <li>• Black Housing</li> </ul>
CMIP8242	CMIP8242B	CMIP8242W	CMIP8242WB	
<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• DWDR</li> <li>• White Housing</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• DWDR</li> <li>• Black Housing</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> <li>• White Housing</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 4mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> <li>• Black Housing</li> </ul>	

LTB345	LTB345B
Universal Junction Box	Universal Junction Box (Black)

IP Bullet Camera

Key Features

- 2 - 4 Megapixel Resolution
- Varifocal Lens
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- 42 IR up to 100ft
- Audio I/O, Alarm I/O
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- IP67
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Junction Box Included

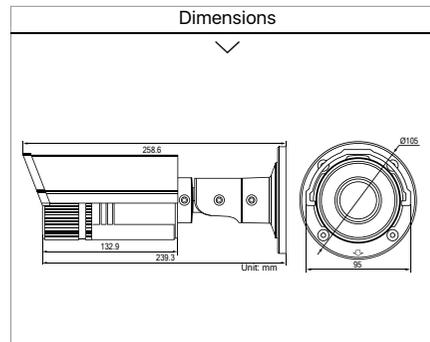

CMIP9723-S

- 2MP
- 2.8 - 12mm Varifocal Lens
- 1920 x 1080P@30fps
- DWDR

CMIP9723W-S

- 2MP
- 2.8 - 12mm Varifocal Lens
- 1920 x 1080P@30fps
- True WDR 120dB

CMIP9743-SZ

- 4MP
- 2.8 - 12mm VF Motorized Lens with Smart Focus
- 2688 x 1520P@20fps
- DWDR



LTB378



Pole Mount

LTB379



Corner Mount

Long Range IP Bullet Camera

Key Features


- 4 x Matrix IR LED up to 394ft
- 20x Optical Zoom Motorized Lens with Auto Focus
- Up to 60fps
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- Audio I/O, Alarm I/O
- True WDR 120dB
- IP67
- HLC
- 3D DNR, BLC
- DC12V, PoE
- UL Listed



CMIP9223W-SZ

- 2MP
- 4.7 - 94mm VF Motorized Lens
- Ultra-Low Light
- 1920 x 1080P up to 60fps

Dimensions



Fixed IP Bullet Camera

Key Features

- 4 Megapixel Resolution
- Support H.264 Zip+, H.264
- 2 x Matrix IR LED up to 165ft
- Video Content Analytics
- IP67
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed
- Junction Box Included



CMIP9142

- 4MP
- 4mm Fixed Lens
- 2688 x 1520P@20fps
- DWDR


CMIP9142W

- 4MP
- 4mm Fixed Lens
- 2688 x 1520P@20fps
- True WDR 120dB

CMIP9142W-6

- 4MP
- 6mm Fixed Lens
- 2688 x 1520P@20fps
- True WDR 120dB

Dimensions





IP Dome Camera


# Super Low Profile

**Maximize forensic evidence with assurance of efficient on-board storage, audio, and optimal viewing resolution.**



### Key Features

- 4 - 5 Megapixel Resolution
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Support H.264 Zip+, H.264
- 10 IR up to 33ft
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- 3-Axis
- Built-in Microphone, Audio Output, Alarm I/O
- IP67, IK8 Vandal-Proof
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed

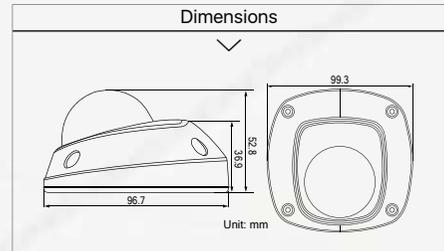

CMIP3142W-28SWIFI	CMIP3142-28S	CMIP3142W-28S	CMIP3152-28S
<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> <li>• Built-in Wi-Fi</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• DWDR</li> </ul>	<ul style="list-style-type: none"> <li>• 4MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2688 x 1520P@20fps</li> <li>• True WDR 120dB</li> </ul>	<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 2.8mm Fixed Lens</li> <li>• 2560 x 1920P@20fps</li> <li>• DWDR</li> </ul>

Fisheye IP Camera

### Key Features

- 6 & 12 Megapixel Resolution
- 360° Fisheye and 180° Panoramic View
- Multiple Viewing Modes and Virtual PTZ
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- Heat Map for Motion Analytics
- Low-light, IR up to 33ft
- IP66, IK10 Vandal-Proof
- Built-in Microphone and Speaker
- DWDR
- DC12V, PoE
- UL Listed



CMIP7562F-E	CMIP75122F-SE	Dimensions
<ul style="list-style-type: none"> <li>• Fisheye IP Camera</li> <li>• 6MP</li> <li>• 1.27mm Fixed Lens</li> <li>• 3072 x 2048@25fps</li> </ul>	<ul style="list-style-type: none"> <li>• Fisheye IP Camera</li> <li>• 12MP</li> <li>• 1.98mm Fixed Lens</li> <li>• 4000 x 3072@25fps</li> <li>• Audio I/O, Alarm I/O</li> </ul>	

LTB756	LTB759	LTB755
Wall Mount	Ceiling Mount	Inclined Ceiling/Wall Mount

LPR IP Bullet Camera

See License Plate Details at Night

The all-new Platinum VF Motorized Lens LPR Network IP Camera utilizes white flux LEDs to minimize reflections and improve clarity on plate numbers in color.

Key Features


- White Flux LEDs
- Varifocal Motorized Lens
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Video Content Analytics
- ANR (Automatic Network Replenishment)
- True WDR 120dB
- 3D DNR, BLC
- Audio I/O, Alarm I/O
- IP67
- DC 12V, PoE
- UL Listed



CMIP7923LPR-20

- 2MP
- 8 - 20mm VF Motorized Lens
- 1920 x 1080P@30fps

Dimensions

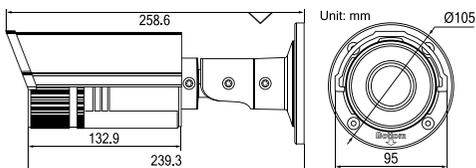

CMIP7812W

- People Counting IP Camera
- 1.3MP
- 2.8mm Fixed Lens
- 1280 x 960P@30fps
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Audio I/O, Alarm I/O
- Length of Cable: 2m
- DC12V



CMIP2832DW-S

- Box IP Camera
- 3MP
- 2048 x 1536P@20fps
- Supports H.264/ H.264 ZIP +
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- True WDR 120dB
- Audio I/O, Alarm I/O
- DC12V/AC24V/PoE



\* Lens Sold Separately

CMIP7122

- 2MP
- 4mm Fixed Lens
- 1920 x 1080P@30fps
- Magnetic Snap-on Dome Cover, Screwless Installation
- In-Ceiling Installation
- Support H.264 Zip+, H.264
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- DWDR
- 3D DNR, BLC
- DC 12V, PoE
- UL Listed



CMIP183

- Pinhole IP Camera
- 1.3MP
- 2.8mm Fixed Lens
- 1280x960P@30fps
- Supports H.264/ H.264 ZIP +
- True WDR 120dB
- Micro SD/SDHC/SDXC Card Slot up to 128GB
- Audio I/O, Alarm I/O
- DC12V, PoE



LTLM550



2MP HD Lens, F1.4  
Varifocal 5 - 50mm  
1/3", Auto Iris, CS Mount

LTL3M2812



3MP HD Lens, F1.4  
Varifocal 2.8 - 12mm  
1/2.7", Auto Iris, CS Mount

LTLM358



2MP HD Lens, F1.4  
Varifocal 3.5-8mm  
1/3", Auto Iris, CS Mount

LTL510011



Long Range Lens, F1.6  
Varifocal 5-100mm  
1/3", Auto Iris, CS Mount



IP PTZ Camera



YouTube

Key Features

- 1/2.8" CMOS
- Auto IR Intensity Adjustment
- 3D Zoom
- Schedule Task
- Audio I/O, Alarm I/O
- BNC Output

Smart Tracking PTZ

- Detects Moving targets
- Tracks Movement
- Zoom in for Forensic Details



PTZIP762X20IR

- Smart Tracking
- 2MP, Full HD 1080P
- 1920x1080P@30fps
- 4.7-94mm
- 20x Optical Zoom
- 10 IR LEDs@495ft
- High PoE, AC 24V
- 6" (Φ)

Key Features

- 1/2.8" CMOS
- 20x Optical Zoom
- 4.7-94mm
- 3D Zoom
- Schedule Task
- Audio I/O, Alarm I/O
- True Day/Night
- 3D DNR, DWDR
- 3D Privacy Masking
- PoE Plus, AC 24V
- 4" (Φ)



Wall Mount bracket Included



Ceiling & Flush Mount

PTZIP211X20-C

- 1MP, HD 720P
- 1280x720P@30fps
- Ceiling & Flush Mount
- Indoor

PTZIP212X20N

- 2MP, Full HD 1080P
- 1920x1080P@30fps
- IP66
- Indoor/Outdoor
- Wall Mount Bracket Included

PTZIP212X20N-C

- 2MP, Full HD 1080P
- 1920x1080P@30fps
- Ceiling & Flush Mount
- Indoor

Key Features

- 1/2.8" CMOS
- Auto IR Intensity Adjustment
- 3D Zoom
- Schedule Task
- IP66
- Audio I/O, Alarm I/O
- True Day/Night
- 3D DNR, DWDR
- 3D Privacy Masking
- PoE Plus, AC 24V
- Wall Mount Bracket Included



PTZIP512X20NIR

- 2MP, Full HD 1080P
- 1920x1080P@30fps
- 20x Optical Zoom
- 4.7-94mm
- 20x Optical Zoom
- 1/2.8" CMOS
- 4 Matrix IR LEDs@492ft
- High PoE, AC 24V
- BNC Output
- 5" (Φ)

PTZIP772X30NIR

- 2MP, Full HD 1080P
- 1920x1080P@30fps
- 30x Optical Zoom
- 4.3-129mm
- 30x Optical Zoom
- 1/2.8" CMOS
- 6 IR LEDs@394ft
- High PoE, AC 24V
- 6" (Φ)



HD-TVI PTZ Camera

Key Features

- 23x Optical Zoom, 4-92mm
- 1/3" CMOS
- True Day/Night, 3D DNR, DWDR
- 3D Privacy Masking
- 256 Preset Positions
- 4 Patterns, 8 Patrols
- Self-adaptive, RS485 Pelco D/Pelco P
- CVBS Output
- AC 24V
- 4" (Φ)



Wall Mount bracket Included

Ceiling & Flush Mount

A	B	C
<b>PTZH213X23-C</b>	<b>PTZH212X23</b>	<b>PTZH212X23-C</b>
<ul style="list-style-type: none"> <li>• 1MP, HD 720P</li> <li>• 1280x720P@30fps</li> <li>• Ceiling &amp; Flush Mount</li> <li>• Indoor</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP, Full HD 1080P</li> <li>• 1920x1080P@30fps</li> <li>• IP66</li> <li>• Wall Mount Bracket Included</li> <li>• Indoor/Outdoor</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP, Full HD 1080P</li> <li>• 1920x1080P@30fps</li> <li>• Ceiling &amp; Flush Mount</li> <li>• Indoor</li> </ul>

Key Features

- 1/3" CMOS
- True Day/Night, 3D DNR, DWDR
- 3D Privacy Masking
- 256 Preset Positions
- 4 Patterns, 8 Patrols
- Self-adaptive, RS485 Pelco D/Pelco P
- IP66, Indoor/ Outdoor
- AC 24V
- Wall Mount Bracket Included
- 5" (Φ)



D

**PTZH512X30IR**

- 2MP, Full HD 1080P
- 1920X1080P @30fps
- 30x Optical Zoom, 4-120mm
- 4 Matrix IR LEDs@492ft
- CVBS Output

PTZ Keyboard



Image	A	B	C
	<b>KB833</b>	<b>KB835</b>	<b>KB837</b>
Connection Type	RS485		USB
Compatible Model	TVI PTZs and Analog PTZs PTZIP762X20IR		NVR NVMS7000 PC Software
Price			


LTB751	LTB751-20	LTB378	LTB397	LTB742
Pendant Mount	Pendant Mount	Pole Mount	Corner Mount	Parapet Wall Mount



# What's New

## LTS Platinum Network Video Recorder

- The market's first HD-TVI DVR H.265/H.265+ Smart Codec Technology
- 5-in-1 Penta-brid and self-adaptive
  - TVI
  - CVI
  - AHD
  - IP
  - Analog
- Supports up to 40 IP cameras
- Up to 4K IP camera input/output, live view, and playback



Professional Level



Image



A | Mini 1U Case

B | C | Compact Case



	A	B	C
Model Number	<b>LTD8504K-ST</b>	<b>LTD8508K-ST</b>	<b>LTD8516K-ST</b>
Price			
Analog & HD-TVI Video In	4CH	8CH	16CH
Record Rate	5MP (2560x1920P)@12fps/3MP (1920x1536P)@15fps/1920x1080P@30fps		
IPC Input	2CH, Up to 6MP (3072x2048P)		
Video Output	1CVBS, 1VGA/HDMI up to 1920x1080P	1CVBS, 1VGA/HDMI, VGA up to 1920x1080P, HDMI output up to 4K (3840x2160P)	
Playback Channel	4CH	8CH	16CH
Audio In/Out	4CH/1CH, RCA		
Alarm In/Out	4/1	8/4	16/4
Network	10/100/1000Mbps		
Storage	1 SATA up to 8TB,NAS,IP SAN	2 SATA up to 16TB,NAS,IP SAN	
eSATA	-		
USB	2, USB2.0	1 USB 2.0/1 USB 3.0	
PTZ	1 RS485		
Support POS#	-	-	4
Product Dimensions	12.4"(W)x9.1"(D)x1.8"(H)	15"(W)x12.4"(D)x1.8"(H)	



# What's More

## Enterprise Level DVR System

- PT Cloud and Cloud-based upgrade
- Support POS
- Integrated with access control and doorbell system
- Video verification
- Supports multiple languages



Image



	D	E	F
Model Number	LTD8416K-ST	LTD8424K-ST <b>NEW</b>	LTD8432K-ST <b>NEW</b>
Price			
Analog & HD-TVI Video In	16CH	24CH	32CH
Record Rate	5MP (2560x1920P)@12fps/3MP (1920x1536P)@15fps/1920x1080P@30fps		
IPC Input	up to 18CH & up to 8MP IP input (3840x2160P)	up to 32CH & up to 8MP IP input (3840x2160P)	up to 40CH & up to 8MP IP input (3840x2160P)
Video Output	1CVBS, 1VGA/2HDMI, VGA/HDMI1 up to 1920x1080P, HDMI2 up to 4K (3840x2160P)		
Playback Channel	16CH		
Audio In/Out	4CH/2CH, RCA		4CH/1CH, RCA
Alarm In/Out	16/4		
Network	10/100/1000Mbps		
Storage	4 SATA up to 32TB,NAS, IP SAN, RAID 0, 1, 5, 6, 10		
eSATA	1		
USB	2 USB2.0/1 USB3.0		
PTZ	RS-232, RS-485 (full-duplex), Keyboard		
Support POS#	8		12
Product Dimensions	17.5"(W)x15.3"(D)x2.8"(H)		



## DVRs - Platinum Series

### Advanced Level



G | H | Mini 1U Case

I | J | Compact Case

K | 1U Case

Image



	G	H	I	J	K
<b>Model Number</b>	<b>LTD8304K-ET</b>	<b>LTD8308K-ETC</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>LTD8308K-ET</b>	<b>LTD8316K-ET</b>	<b>LTD8308T-ST</b>
Price					
Analog & HD-TVI Video In	4CH	8CH		16CH	8CH
Record Rate	Channel 1 up to 4MP	Channel 1, 2 up to 4MP		Channel 1,2,3,4 up to 4MP	1080P@30fps
IPC Input	1CH up to 4MP@20fps	2CH up to 4MP @20fps			2CH up to 2MP @30fps
Video Output	1CVBS, 1VGA/1HDMI, HDMI up to 1920x1080P			1CVBS, 1VGA/1HDMI, HDMI output up to 4K (3840 x 2160@30Hz)	1CVBS, 1VGA/1HDMI, HDMI up to 1920x1080P
Playback Channel	4CH	8CH		16CH	8CH
Audio In/Out	1CH/1CH, RCA				4 CH/1CH, RCA
Alarm In/Out	-				8/4
Network	10/100Mbps			10/100/1000Mbps	
Storage	1 SATA up to 6TB, NAS, IP SAN		2 SATA up to 12TB, NAS, IP SAN		
eSATA	-				
USB	2, USB 2.0		1 USB 2.0, 1 USB 3.0		2, USB 2.0
PTZ	1 RS485				
Support POS#	-				4
Product Dimensions	12.4"(W)x9.1"(D)x1.8"(H)		15"(W)x12.4"(D)x1.8"(H)		17.5"(W)x11.4"(D)x1.8"(H)

### Enterprise Level



K | L | 1.5U Case

M | N | 2U Case

Image




	L	M	N	O
<b>Model Number</b>	<b>LTD8424T-FA</b>	<b>LTD8432T-FA</b>	<b>LTD9224T-FA</b>	<b>LTD9232T-FA</b>
Price				
Analog & HD-TVI Video In	24CH	32CH	24CH	32CH
Record Rate	24CH 720P@30fps 24CH 1080P@15fps	32CH 720P@30fps 32CH 1080P@15fps	24CH 720P@30fps 24CH 1080P@15fps	32CH 720P@30fps 32CH 1080P@15fps
IPC Input	Up to 8CH 1080P@30fps		Up to 16CH 1080P@30fps	
Video Output	VGA/HDMI up to 1080P		1 VGA, 2 HDMI up to 1080P	1 VGA, 2 HDMI up to 1080P
Playback Channel	24CH	32CH	24CH	32CH
Audio In/Out	4CH/1CH, RCA		16CH/1CH, RCA	
Alarm In/Out	16/4		16/8	
Network	10/100/1000Mbps		10/100/1000Mbps, 2xRJ45	
Storage	4 SATA up to 24TB, NAS, IP SAN		8 SATA up to 48TB, NAS, IP SAN	
eSATA	1			
USB	3, USB 2.0			
PTZ	1 RS485			
Support POS#	8		16	
Product Dimensions	17.5"(W)x15.3"(D)x2.8"(H)		17.5"(W)x18.5"(D)x3.5"(H)	



HD-TVI Turret Camera

Key Features

- High Definition Turret HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 131ft
- UTC Control to OSD Menu
- DC 12V

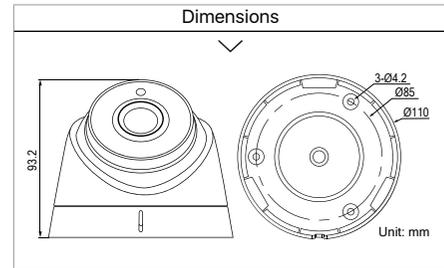

<b>CMHT1722W-28</b>	<b>CMHT1722WE-28</b>	<b>CMHT1752N-28</b> <span style="color: blue; font-weight: bold;">NEW</span>	<b>CMHT1752-28</b>
<b>CMHT1722W</b>	<b>CMHT1722WE</b>	<b>CMHT1752N</b>	
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8mm/3.6mm Fixed Lens</li> <li>• 1920x1080P@30fps</li> <li>• 0.01 Lux, Smart IR</li> <li>• True WDR 120dB</li> <li>• IP66</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP Ultra Low Light</li> <li>• 2.8/3.6mm Fixed Lens</li> <li>• 1920x1080@30fps</li> <li>• 0.005 Lux@F2.0</li> <li>• True WDR 120dB</li> <li>• IP67</li> </ul>	<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 2.8/3.6mm Fixed Lens</li> <li>• 2560x1944@20fps</li> <li>• 0.01 Lux, Smart IR</li> <li>• IP67</li> </ul>	<ul style="list-style-type: none"> <li>• 5MP Ultra Low Light</li> <li>• 2.8mm Fixed Lens</li> <li>• 2560x1944@20fps</li> <li>• 0.008 Lux@F1.2</li> <li>• IP67</li> </ul>

<b>LTB03-W</b>	<b>LTB307</b>	<b>LTB301</b>	<b>LTB378</b>	<b>LTB379</b>	<b>LTB371</b>
Junction Box	Junction Box	Wall Mount	Pole Mount	Corner Mount	Pendant Mount

HD-TVI Turret Camera

Key Features


- High Definition Turret HD-TVI Camera
- 1 Matrix IR LED up to 131ft
- UTC Control to OSD Menu
- 0.01 Lux, Smart IR
- IP66
- DC 12V



HD-TVI Turret Camera

Key Features

- High Definition Turret HD-TVI Camera
- 2MP
- 1920x1080P@30fps
- IP66
- DC 12V



<b>CMHT2722-28/ CMHT2722B-28</b>	<b>CMHT2722W-28</b>	<b>CMHT2023R/B-A</b>	<b>Dimensions</b>
<b>CMHT2722</b>	<b>CMHT2722W</b>	<ul style="list-style-type: none"> <li>• 2.8-12mm Varifocal Lens</li> <li>• 36 IR LEDs up to 115ft</li> <li>• CVBS Output (jumper included)</li> <li>• Housing option (White/Black)</li> </ul>	
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8mm/3.6mm Fixed Lens</li> <li>• 1920x1080P@30fps</li> </ul>	<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 2.8/3.6mm Fixed Lens</li> <li>• 1920x1080P@30fps</li> <li>• True WDR 120dB</li> </ul>		

<b>LTB03-W</b>	<b>LTB307</b>	<b>LTB301</b>	<b>LTB378</b>	<b>LTB379</b>	<b>LTB371</b>	<b>LTB01-W</b>	<b>LTB01-B</b>
Junction Box	Junction Box	Wall Mount	Pole Mount	Corner Mount	Pendant Mount	Junction box	Junction box




# HD-TVI Cameras - Platinum Series

## HD-TVI Turret Camera

### Key Features

- High Definition Turret HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 65ft
- UTC Control to OSD Menu
- IP67
- DC 12V

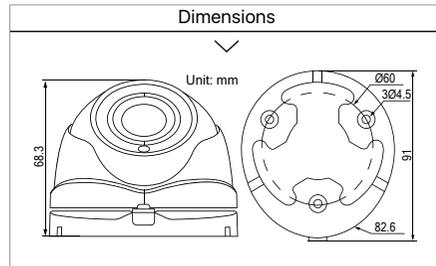

**CMHT1322WE-28**



**CMHT1322WE**

- 2MP Ultra Low Light
- 2.8/3.6mm Fixed Lens
- 1920x1080@30fps
- 0.005 Lux@F2.0
- True WDR 120dB

**CMHT1352N-28**



**CMHT1352N**

- 5MP
- 2.8/3.6mm Fixed Lens
- 2560x1944@20fps
- 0.01Lux, Smart IR

LTB342-110T



Wall Mount

LTB378



Pole Mount

LTB379



Corner Mount

LTB345



Universal Junction Box


## HD-TVI Turret Camera

### Key Features

- High Definition Turret HD-TVI Camera
- 24 IR LEDs up to 65ft
- IP66
- DC 12V



### Dimensions



**CMHT1422W-28**

- 2MP
- 2.8mm Fixed Lens
- 1920x1080P@30fps
- True WDR 120dB
- UTC Control to OSD Menu


## HD-TVI Turret Camera

### Key Features

- High Definition Turret HD-TVI Camera
- 2MP
- 1920x1080P@30fps
- 24 IR LEDs up to 65ft
- UTC Control to OSD Menu
- IP66
- DC 12V



### Dimensions



**CMHT2122/B-28**  
**CMHT2122/B**

- 2MP
- 2.8/3.6mm Fixed Lens
- Housing option (White/Black)

LTB342-110T



Wall Mount

LTB378



Pole Mount

LTB379



Corner Mount

LTB345



Universal Junction Box

LTB345B



Universal Junction Box





HD-TVI Turret Camera

Key Features

- High Definition Turret HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- UTC Control to OSD Menu
- DC 12V

Dimensions

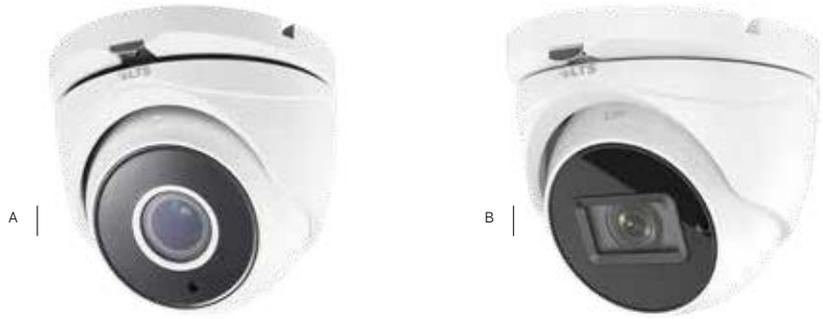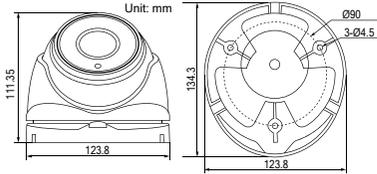

<b>CMHT1923W-Z</b>	A	<b>CMHT1923WE-Z</b>	A	<b>CMHT1953N-Z</b> <span style="color: blue; font-weight: bold;">NEW</span>	B
<ul style="list-style-type: none"> <li>• 2MP</li> <li>• 1920x1080@30fps</li> <li>• 0.01 Lux, Smart IR</li> <li>• 6 Matrix IR LED up to 131ft</li> <li>• True WDR 120dB</li> <li>• IP66</li> </ul>		<ul style="list-style-type: none"> <li>• 2MP Ultra Low Light</li> <li>• 1920x1080@30fps</li> <li>• 0.005 Lux@F1.8</li> <li>• 6 Matrix IR LED up to 131ft</li> <li>• True WDR 120dB</li> <li>• Auto focus</li> <li>• IP67</li> </ul>		<ul style="list-style-type: none"> <li>• 5MP</li> <li>• 2560x1944@20fps</li> <li>• 0.01Lux, Smart IR</li> <li>• 2 Matrix IR LED up to 131ft</li> <li>• IP67</li> </ul>	

LTB307	LTB301	LTB378	LTB379
Junction Box	Wall Mount	Pole Mount	Corner Mount

HD-TVI Turret Camera

Key Features

- High Definition Turret HD-TVI Camera
- 2MP
- 1920x1080P@30fps
- 42 IR LEDs up to 131ft
- UTC Control to OSD Menu
- IP66
- DC 12V




HD-TVI Dome Camera

Key Features

- High Definition Dome HD-TVI Camera
- 2MP
- 1920x1080P@30fps
- 2.8-12mm Varifocal Lens
- 24 IR LEDs up to 131ft
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation
- UTC Control to OSD Menu
- IP66



Dimensions



<b>CMHT1823/B</b>	Dimensions		<b>CMHD3423D</b>	<b>CMHD3423DW</b>	<b>LTB396</b>
<ul style="list-style-type: none"> <li>• 2.8-12mm Varifocal Lens</li> <li>• Housing option (White/Black)</li> </ul>			<ul style="list-style-type: none"> <li>• DC 12V, AC 24V</li> </ul>	<ul style="list-style-type: none"> <li>• DC 12V, AC 24V</li> <li>• True WDR 120dB</li> <li>• CVBS Output</li> </ul>	
					Pendant Mount

LTB307	LTB301	LTB378	LTB379	LTB342-140	LTB342-140B	LTB378	LTB379	LTB340
Junction Box	Wall Mount	Pole Mount	Corner Mount	Wall Mount	Wall Mount	Pole Mount	Corner Mount	In-ceiling Mount




# HD-TVI Cameras - Platinum Series

## HD-TVI Dome Camera

### Key Features

- High Definition Dome HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- 2 Matrix IR 2.0 LED up to 131ft
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation
- UTC Control to OSD Menu
- IP67
- DC 12V, AC 24V

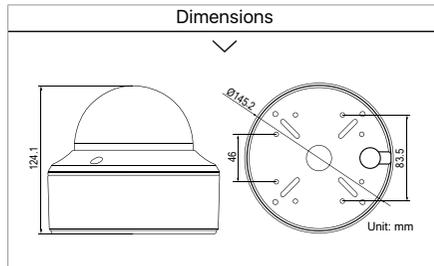

#### CMHD3523DW-Z

- 2MP
- 1920x1080@30fps
- 0.01 Lux, Smart IR
- True WDR 120dB

#### CMHD3523DWE-Z

- 2MP Ultra Low Light
- 1920x1080@30fps
- 0.005 Lux@F1.8
- True WDR 120dB
- Auto focus

#### CMHD3553DN-Z

- 5MP
- 2560x1944@20fps
- 0.01 Lux, Smart IR



#### CMHD3553D-Z

- 5MP Ultra Low Light
- 2560x1944@20fps
- 0.008 Lux@F1.2

#### LTB342-140



Wall Mount

#### LTB342-140B



Wall Mount

#### LTB378



Pole Mount

#### LTB379



Corner Mount

#### LTB340



In-ceiling Mount

#### LTB396




Pendant Mount

## HD-TVI Dome Camera

### Key Features

- High Definition Dome HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 65ft
- IK10 Vandal-Proof Dome
- 3-Axis Easy Installation
- UTC Control to OSD Menu
- IP67
- DC 12V

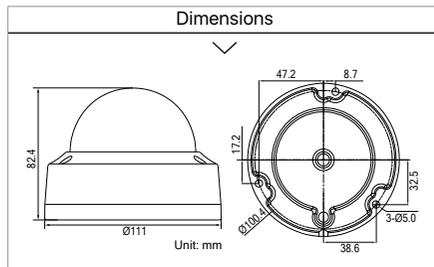

#### CMHD7322WE-28

- 2MP Ultra Low Light
- 2.8mm Fixed Lens
- 1920x1080@30fps
- 0.005 Lux@F2.0
- True WDR 120dB

#### CMHD7352N-28



- 5MP
- 2.8mm Fixed Lens
- 2560x1944@20fps
- 0.01 Lux, Smart IR

#### CMHD7352-28

- 5MP Ultra Low Light
- 2.8mm Fixed Lens
- 2560x1944@20fps
- 0.008 Lux@F1.2

#### LTB347/B



Junction Box (White/Black)

#### LTB349



Ceiling Mount

#### LTB348/B



Wall Mount (White/Black)

#### LTB378



Pole Mount

#### LTB379



Corner Mount

#### LTB342-110





Wall Mount


#### LTB376



Pendant mount



HD-TVI Dome Camera						HD-TVI Mini Bullet Camera	
<h3>Key Features</h3> <ul style="list-style-type: none"> <li>• High Definition Dome HD-TVI Camera</li> <li>• 1920×1080P@30fps</li> <li>• 18 IR LEDs up to 65ft</li> <li>• IK10 Vandal-Proof Dome</li> <li>• 3-Axis Easy Installation</li> <li>• UTC Control to OSD Menu</li> <li>• IP66</li> <li>• DC 12V</li> <li>• Housing option (White/Black)</li> </ul> 						<h3>Key Features</h3> <ul style="list-style-type: none"> <li>• High Definition Bullet HD-TVI Camera</li> <li>• 3.6mm Fixed Lens</li> <li>• 24 IR LEDs up to 65ft</li> <li>• UTC Control to OSD Menu</li> <li>• IP66</li> <li>• DC 12V</li> </ul> 	
<h4>Dimensions</h4> 						<h4>Dimensions</h4> 	
<b>CMHD7422/B-28</b> • 2MP • 2.8mm Fixed Lens • AoV 105.8°		<b>CMHD7422/B</b> • 2MP • 3.6mm Fixed Lens • AoV 84.3°		<b>LTB376</b>  Pendant mount		<b>CMHR6222/B</b> • 2MP • 1920×1080P@30fps • Housing option (White/Black)	
<b>LTB347/B</b>	<b>LTB349</b>	<b>LTB348/B</b>	<b>LTB378</b>	<b>LTB379</b>	<b>LTB342-110</b>	<b>LTB345</b>  Universal Junction Box	
						<b>LTB345B</b>  Universal Junction Box	

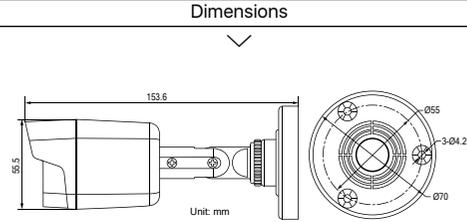HD-TVI Bullet Camera	
<h3>Key Features</h3> <ul style="list-style-type: none"> <li>• High Definition Bullet HD-TVI Camera</li> <li>• 2 Matrix IR 2.0 LED up to 65ft</li> <li>• 0.01 Lux, Smart IR</li> <li>• UTC Control to OSD Menu</li> <li>• DC 12V</li> </ul> 	
<h4>Dimensions</h4> 	
<b>CMHR6422W-28</b> <b>CMHR6422W</b> • 2MP • 2.8mm/3.6mm Fixed Lens • 1920×1080P@30fps • True WDR 120dB • IP66	<b>CMHR6452N-28</b> <span style="background-color: #007bff; color: white; padding: 2px;">NEW</span> • 5MP • 2.8mm Fixed Lens • 2560×1944@20fps • IP67
<b>LTB345</b>  Universal Junction Box	<b>LTB345B</b>  Universal Junction Box

# HD-TVI Cameras - Platinum Series


## HD-TVI Bullet Camera

### Key Features

- High Definition Bullet HD-TVI Camera
- 2 Matrix IR 2.0 LED up to 131ft
- 0.01 Lux, Smart IR
- UTC Control to OSD Menu
- Junction Box Included
- DC 12V



### Dimensions



**CMHR9222W-28**

**CMHR9252-28**

**CMHR9222W**

- 2MP
- 2.8mm/3.6mm Fixed Lens
- 1920x1080P@30fps
- 0.01 Lux, Smart IR
- True WDR 120dB
- IP66

- 5MP Ultra Low Light
- 2.8mm Fixed Lens
- 2560x1944@20fps
- 0.008 Lux@F1.2
- IP67

## HD-TVI Bullet Camera

### Key Features


- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Lens
- 42 IR LEDs up to 165ft
- UTC Control to OSD Menu
- Junction Box Included
- IP66



**CMHR9323D/B**

- 2MP
- 1920x1080P@30fps
- DC 12V, AC 24V
- Housing option (White/Black)

### Dimensions



## HD-TVI Bullet Camera

### Key Features

- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Motorized Lens
- 0.01 Lux, Smart IR
- UTC Control to OSD Menu
- Junction Box Included
- DC 12V, AC 24V




**CMHR9623DW-Z**

- 2MP
- 1920x1080P@30fps
- True WDR 120dB
- 6 Matrix IR LED up to 175ft
- IP66

**CMHR9653DN-Z**

- 5MP
- 2560x1944@20fps
- 2 Matrix IR LED up to 175ft
- IP67

### Dimensions



## HD-TVI Bullet Camera

### Key Features


- High Definition Bullet HD-TVI Camera
- 3.6mm Fixed Lens
- 1 Matrix IR LED up to 131ft
- UTC Control to OSD Menu
- Junction Box Included
- IP66



**CMHR9422**

- 2MP
- 1920x1080P@30fps

### Dimensions



## HD-TVI Bullet Camera

### Key Features


- High Definition Bullet HD-TVI Camera
- 2.8-12mm Varifocal Lens
- 1 Matrix IR LED up to 175ft
- 3D DNR, ICR, Smart IR
- UTC Control to OSD Menu
- Junction Box Included
- IP66
- DC 12V, AC 24V



**CMHR9923DW**

- 2MP
- 1920x1080P@30fps
- True WDR 120dB
- CVBS Output
- 0.014 Lux @ (AGC ON), 0 Lux with IR

### Dimensions



LPR Bullet Camera

# Affordable License Plate Recognition **Day or Night in Color**

The all-new Platinum VF Motorized Lens LPR ensures parking lots and structures, entrance/exit points, apartments and enclosed communities are secured by recognizing who is coming and going at an affordable price.




**LPR100**

- High Definition LPR HD-TVI Camera
- 1.3MP
- 1280x960P@30fps
- 6-22mm Varifocal Motorized Lens
- 6 White Giant Flux IR LEDs up to 131ft
- Ultra Low Lux
- 24/7 Color Mode
- Bracket LTB100 Included
- IP66, DC 12V
- CVBS Output



Dimensions

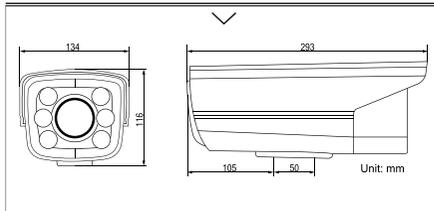

24/7  
**Color  
Mode**

Convert Camera

**CM1922T**

- High Definition Covert HD-TVI Camera
- 2MP
- 3.7mm Pinhole Lens
- 1920x1080P@30fps
- DC 12V
- HD-TVI/Analog/AHD/CVI 4-in-1 Toggle
- 1.6" x 1.9" x 1.5" (41mm x 48mm x 38mm)



**CM1924T**

- High Definition Covert HD-TVI Camera
- 2MP
- 3.7mm Pinhole Lens
- 1920x1080P@30fps
- DC 12V
- HD-TVI/Analog/AHD/CVI 4-in-1 Toggle
- 4.7" x 2.0" x 2.2" (120mm x 59mm x 57mm)



**CM1925T**

- High Definition Covert HD-TVI Camera
- 2MP
- 3.7mm Pinhole Lens
- 1920x1080P@30fps
- DC 12V
- HD-TVI/Analog/AHD/CVI 4-in-1 Toggle
- 2.7" x 4.7" x 1.9" (69mm x 120mm x 47mm)



Long-range Bullet Camera

## Long Distance HD-TVI Camera




**CMHR6123DWA**

- High Definition Long-range HD-TVI Camera
- 2MP
- 1920x1080P@30fps
- 5-50mm Varifocal Long-range Lens
- Auto focus
- 2 Matrix IR LEDs up to 360ft
- True WDR 120dB
- CVBS Output
- Junction Box Included
- IP66
- UTC Control to OSD Menu
- DC 12V, AC 24V



Dimensions



Up to  
**360ft**



# Reliable & Affordable Access Control With Video Verification

LTS Access Control Fully Integrated with LTS Video Solutions.



NVMS7000 PC

Live Event Instant Playback  
Log Search Remote Playback



## Controllers

- 32-bit High Speed Processor
- TCP/IP Network Communication
- Supports Wiegand W26/W34 Card Readers
- Up to 10,000 Cards Information
- Up to 50,000 Card Swiping Records
- Anti Passing Back, Open Door with First Card
- Free Access Control Management Software NVMS7000 with Video Integration

NEW



**LTK2802**  
2 Door Controller  
Up to 4 Wiegand Card Readers

NEW



**LTK2804**  
4 Door Controller  
Up to 4 Wiegand Card Readers

## Terminals

- 2MP 1920x1080p@30fps with IR HD Camera
- Support Mifare Card
- LTS NVR/DVR Compatible
- Built-in Mic and Speaker
- Support TCP/IP
- MicroSD Card up to 128GB
- Up to 50,000 Card Information
- Up to 200,000 Card Swiping Records
- IP65

NEW



**LTK3500S**  
Video Access Control and Doorbell

- Support Mifare Card and Passcode
- Up to 3,000 Card Information
- No Software Needed

NEW



**LTK3801M**  
Standalone Access Control 1 Door Terminal

# Mifare Card Readers

- Wiegand W26/W34 Card Reader
- Mifare Card (13.56MHz) Compatible
- Built-in Buzzer
- LED Indicator
- DC 12V



**LTK1802M**  
IP65  
4.56"x1.7"x0.67"  
-4°F ~ 149°F



**LTK1107M**  
IP65  
4.56"x1.7"x0.87"  
-4°F ~ 149°F



**LTK1103M**  
IP64  
5.08"x2.99"x0.58"  
-40°F ~ 158°F



**LTK1802MK**  
Keypad w/ 12 keys  
IP65  
4.56"x1.7"x0.67"  
-4°F ~ 149°F



**LTK1107MK**  
Keypad w/ 12 keys  
IP65  
4.56"x1.7"x0.87"  
-4°F ~ 149°F



**LTK1103MK**  
Keypad w/ 12 keys  
IP64  
5.08"x2.99"x0.58"  
-40°F ~ 158°F

# Accessories



**LTKB01**  
Aluminum Alloy Exit Button  
(3.39"x3.39"x0.79")



**LTKB02**  
Aluminum Alloy Exit Button  
(3.54"x1.38"x1.14")



**LTKB04**  
Touchless Aluminum Alloy Exit Button  
(3.39"x1.97"x1.34")



**LTKC1356M**  
Smart Card  
Frequency: 13.56MHz.



**LTKF1356M**  
Key Fob  
Frequency: 13.56MHz.



**LTKI100ME**  
Plug and Play USB Mifare  
Card Issuer



**LTA1806G-CMR**  
18/6 99.99%  
OFC 500ft Gray Stranded  
Shielded Control Cable



**LTKL101**  
DC 12V Electric Door Strike



**LTKL206**  
DC 12V 600LB Magnetic Lock



**LTKLBLZ06**  
LZ Bracket for LTKL206



**LTKLBU06**  
U Bracket for LTKL206



# We have you covered, like nobody else.



## Enhance Wireless Coverage

- Connect Even Miles Away
- Simple Untethered Solution

### Wireless Solution



<b>LTUBNSM5</b>	<b>LTUBNBM5-16</b> <b>LTUBNBM5-19</b>	<b>LTUBNBE-5AC-16</b> <b>LTUBNBE-5AC-19</b>	<b>LTUBNBE-WMK</b>
5GHz NanoStation M5 15+ km; 150+Mbps	5GHz NanoBeam M5 150+ Mbps 16dBi (10+ km) /19dBi (15+ km)	5GHz NanoBeam AC 450+ Mbps 16dBi (10+ km) /19dBi (15+ km)	NanoBeam Wall Mount Kit



<b>LTUBROCKET-M5</b> <b>NEW</b>	<b>LTUBR5AC-LITE</b> <b>NEW</b>	<b>LTUBAMO-5G10-OMNI</b> <b>NEW</b>	<b>LTUBAMO-5G13</b> <b>NEW</b>
5GHz 150+Mbps Rocket M5 BaseStation	5GHz 500+Mbps Rocket AC BaseStation	5GHz airMAX Omni 10dBi Antenna	5GHz airMAX Omni 13dBi Antenna



**Better Coverage**  
End to end solutions, now including power  
strips, extension cords, and SD cards.  
**Coming Soon!**



Tester

# 5-in-1 Multi-Purpose Camera Tester Offers Convenience

Adjust camera settings on-site instead of the NVR/DVR. 5-1 allows you to test IP, HD-TVI, CVI, AHD, and Analog in Full HD 1080P



<b>LTA-AU25S</b>	<b>LTA-X43M</b>	<b>LTA-X48M</b>	<b>LTA-X78M</b>
Multi-Function Network Cable Tester Testing RJ45=USOC 4/6/8, 10 Base-T, ELA/TIA 568A/B, AT&T258A, Token Ring, BNC, LED, USB	4.3 inch Touch Screen,800X480 Resolution 5-1 Multi-purpose Camera Tester Support IP/TVI/AHD/CVI/Analog test	4.3 inch IPS Touch Screen, 960X540 Resolution; 5-1 Multi-purpose Camera Tester; 8MP IP, 5MP TVI, 4MP AHD, 4MP CVI , Analog test; H.265/H.264, 4K video display via mainstream; Built in WIFI ; HDMI input & output	7 inch retina Touch Screen,1920x1200 Resolution; 5-1 Multi-purpose Camera Tester; 8MP IP, 5MP TVI, 4MP AHD, 4MP CVI , Analog test; H.265/H.264, 4K video display via mainstream; Built in WIFI ; HDMI input & output

## Injectors / Switches / Repeaters



<b>POE-I100H</b>	<b>POE-I100GL/POE-I100GH</b>	<b>POE-SW401</b>
Single Port Injector 19W-802.3af/10/100Mbps	Single Port Gigabit Injector 15.4W-802.3af/ 30W-802.3af-10/100/1000Mbps	4 PoE Port Switch with 1 Port Uplink 58W-802.3af/at-10/100Mbps Up to 820ft



<b>POE-SW800G</b>	<b>POE-SW801</b>	<b>POE-SW1602</b>	<b>POE-SW2402</b>
8 Port Gigabit Switch 130W-802.3af/10/100/1000Mbps	8 PoE Port Switch with 1 Port Uplink 123W-802.3af/at-10/100Mbps Up to 820ft	16 PoE Port Switch with 2 Gb Uplink and 2 SFP Ports 230W-802.3af/at-10/100Mbps Up to 820ft	24 PoE Port Switch with 2 Gb Uplink and 2 SFP Ports 370W-802.3af/at-10/100Mbps Up to 820ft

## CCTV Monitors CALL FOR PRICE



M-185JPGM8



M-215JPGM8

**Monitors come with:**  
Remote, BNC, HDMI & VGA Inputs



DVR Mounting Brackets	DVR Lockboxes
LTB191D	LT-DVRLB18-18-5
LTB380D	LT-DVRLB21-21-8
LTB201D	LT-DVRLB21-24-8
LTB202D	LTBHWB (Wall Mount Bracket)



## Accessories

### IR Illuminators & Emergency Lights



<b>LTIR802</b> <b>NEW</b>	<b>LTIR803</b> <b>NEW</b>	<b>LTEL001</b>	<b>LTEL002G / LTEL002R</b>	<b>LTEL004G / LTEL004R</b>
6 IRs@210ft/45° DC 12V/ 1A	12 IRs@210ft/80° DC 12V/ 2A	Twin Head Emergency Universal Mount LED Thermoplastic Unit	LED Exit with Battery Backup Green/Red Letters 120/277V	Combo EXIT & Emergency Universal Mount LED Thermoplastic Unit

### Power Adapters



<b>PS120V0800</b>	<b>PS120V1000</b>	<b>PS120V2000</b>	<b>PS120V3000</b>	<b>TS5-6W</b>	<b>PS240V1000</b>	<b>PS240V3000</b>	<b>DV-AT12015-D01</b>
800mA DC 12V	1000mA DC 12V	2000mA DC 12V	3000mA DC 12V	5000mA DC 12V	1000mA AC 24V	3000mA AC 24V	1500mA (Max) AC 24V to DC 12V

### Power Supplies



<b>PS120V5-D</b>	<b>DV-AT1207M-D09</b>	<b>DV-AT1209A-D9P</b>	<b>DV-AT1212A-D18P</b>	<b>DV-RT1224A-D24</b>
4 Port; 5 Amp Protection: PTC DC 12V	9 Port; 7 Amp Protection: PTC DC 12V	9 Port; 9 Amp Protection: PTC DC 12V	18 Port; 12 Amp Protection: PTC DC 12V	24 Port; 24 Amp Protection: PTC DC 12V



<b>DV-RT1232A-D32</b>	<b>DV-AC2408A-D07</b>	<b>DV-AC2412A-D10</b>	<b>DV-AT1205A-D07</b>	<b>DV-AT1209A-D9</b>
32 Port; 32 Amp Protection: PTC DC 12V	9 Port; 8 Amp Protection: PTC AC 24V	18 Port; 12 Amp Protection: PTC AC 24V	4 Port; 5 Amp Protection: Fuse DC 12V	9 Port; 9 Amp Protection: Fuse DC 12V



<b>DV-AT1212A-D18</b>	<b>DV-AT1210A-D07</b>	<b>DV-AT1210A-D10</b>	<b>DV-AT1215A-D10</b>	<b>DV-AT1232A-D18</b>	<b>DV-AT1232A-D27</b>
18 Port; 12 Amp Protection: Fuse DC 12V	9 Port; 10 Amp Protection: Fuse DC 12V	18 Port; 10 Amp Protection: Fuse DC 12V	18 Port; 18 Amp Protection: Fuse DC 12V	18 Port; 32 Amp Protection: Fuse DC 12V	27 Port; 32 Amp Protection: Fuse DC 12V



Passive Video Balun Transceivers



<b>LTAB3010T</b> 1-ch HD passive video balun support HDTV I up to 2MP	<b>LTAB3020T</b> 1-ch HD passive video balun support HDTV I up to 2MP	<b>LTAB4020T</b> 1-ch HD passive video balun Support 3/4/5MP HD-TVI, CVI, AHD and CVBS	<b>LTAB4030TP</b> 1-ch HD video & power balun for 3/4/5MP HD-TVI, CVI, AHD and CVBS
--	--	---	--



<b>LTAB1015</b> I type Video Balun	<b>LTAB1016</b> L type Video Balun	<b>LTA1011</b> Video Balun	<b>LTA1010</b> Video Balun BNC/RJ45 DC Power	<b>LTAB1017DC</b> Video Balun BNC/RJ45 DC Power	<b>LTA2009A</b> 4 CH UTP Video Transceiver 4 x BNC Female To 1 x RJ45
---------------------------------------	---------------------------------------	-------------------------------	---	--	--

Warning Signs



<b>LTSTICKER</b> Warning Sticker Decal Weather-Resistant	<b>LTSIGNB</b> 9" (W) x 11"(H)	<b>LTSIGNA</b> 11" (W) x 18"(H)	<b>ACS-801</b> Solar Power (No Battery Needed) Actively Flashing LCD
---	-----------------------------------	------------------------------------	---

Camera and Monitor Brackets



<b>LTB303W</b> Bracket for Camera White Indoor Camera Bracket Swivel 360°, Tilt 90°Aluminum	<b>LTB303S</b> Bracket for Camera Silver Indoor Camera Bracket Swivel 360°, Tilt 90°Aluminum	<b>WM-LCD</b> Bracket for Monitor LCD Monitor Wall Mount 2.2"-14.4" Ext. Max Ld. 33lbs., Vesa 70/100	<b>WM-CEILING-LCD</b> Bracket for Monitor LCD Monitor Ceiling Mount 15.5"-22.8" Ext. Max Ld. 44lbs,Support 10-30" Monitor
--	---	---	--

Connectors

<b>LTA1001</b> BNC Twist-On RG59 Male (20pcs/pack)	<b>LTA1002</b> BNC Male to RCA Female (20pcs/pack)	<b>LTA1003</b> BNC Female to RCA Male (20pcs/pack)	<b>LTA1004</b> BNC Male to RCA Male (20pcs/pack)	<b>LTA1005</b> BNC Coupler Female to Female (20pcs/pack)	<b>LTA1006</b> BNC Compression for RG59 (20pcs/pack)	<b>LTA1007</b> BNC Male Crimp-on (20pcs/pack)	<b>LTA1013</b> BNC Male to 2 BNC Female (20pcs/pack)	<b>LTA1014</b> RJ45 8P8C Cat5e Crimp Connector	<b>LTA1016</b> RJ45 8P8C Cat6 Crimp Connector	<b>KY5E110</b> Enhanced Cat5e Keystone Jack



## Accessories

### Cables (CAT5, CAT6, Pre-Made Siamese, Coaxial Siamese)

<b>LTAC2040</b> <b>LTAC2046</b>	<b>LTAC5100W-CMR</b> <b>LTAC5100BL-CMR</b> <b>LTAC5100B-CMX</b>	<b>LTAC6250W-CMR</b> <b>LTAC6250BL-CMR</b> <b>LTAC6250B-CMX</b>	<b>LTAC1806G-CMR</b>	<b>LTAC2060W / B</b> <b>LTAC2100W / B</b> <b>LTAC2150W / B</b>
1000ft CCA CAT5e/CAT6 Commercial Grade Network Cable	1000ft CAT5e 99.99% OFC UL listed, RoHS Compliant Pass Fluke Test CMR Rated, White/Blue LTAC5100B-CMX : Black Outdoor Rated	1000ft CAT6 99.99% OFC UL listed, RoHS Compliant Pass Fluke Test CMR Rated, White/Blue LTAC6250B-CMX : Black Outdoor Rated	18/6 control cable 500ft Stranded CMR rated Shielded ETL Color Gray	Pre-made HD Siamese Cable W/B with BNC and Power HD-TVI 60ft / 100ft / 150ft
<b>LTAC2031W</b> <b>LTAC2031B</b>	<b>LTAC2033W</b> <b>LTAC2033B</b>	<b>LTAC2030W</b> <b>LTAC2030B</b>	<b>LTAC2032W</b> <b>LTAC2032B</b>	<b>LT-CT601W LT-CT601B</b> <b>LT-CT801W LT-CT801B</b> <b>LT-CT1201W LT-CT1201B</b> <span style="background-color: #007bff; color: white; padding: 2px;">NEW</span>
Siamese Coaxial Cable White/Black Bare Wire 500ft/1000ft- RG59 Coaxial 95% Braided +18/2; 18 AWG CCA Cable		Siamese Coaxial Cable White/Black Bare Wire 500ft/1000ft- RG59 Coaxial 95% Braided +18/2; Solid 100% 18AWG Oxygen Free Copper		Cable tie (100pcs/pack) 6 inch white/ black 8 inch white/ black 12 inch white/ black

### Cables (HDMI, DC Power, RJ45 CAT5e Network, VGA, Microphone)

<b>LTAC2042</b> <b>LTAC2041</b>	<b>LTAC3005/LTAC3110</b> <b>LTAC3125/LTAC3150</b>	<b>LTA2003</b>	<b>LTAC3100</b>
Pre-made RJ45 CAT5e Cable LTAC2042-50ft LTAC2041-100ft	HDMI w/Ethernet 4.5/10/25/50ft Cable Hi-Speed 1080P/3D, 100% Triple Shield 24K Gold Plated w/Nylon Jacket	Terminal Connector 9 Terminal, DC & AC Connector/Splitter	100ft HDMI Cable Hi-Speed 1080P with USB Booster 26AWG
<b>LTA2017</b> <b>LTA2013</b>	<b>LTA2004</b> <b>LTA2014</b>	<b>LTA2010</b> <b>LTA2008</b>	<b>LTA2005</b> <b>LTA2006</b> <b>LTA2011</b> <b>LTA2018</b>
DC Power Connector LTA2017-Male LTA2013-Female (20pcs/pack)	DC Power Adapter Cable LTA2004-Male LTA2014-Female (20pcs/pack)	Male/Female Pigtail LTA2010-Male LTA2008-Female	DC Power Splitter 1 Female to 2 Male DC Power Splitter 1 Male to 2 Female DC Power Splitter 1 Female to 4 Male DC Power Splitter 1 Female to 8 Male
<b>LTAS06</b>	<b>LTA2001</b> <b>LTA2002</b>	<b>LTA2002</b>	<b>LTAV3010</b> <b>LTAV3025</b> <b>LTAV3050</b> <b>LTAV3100</b>
High Sensitivity Audio Monitor Mic Bug range: 30 sq. meters Frequency: 100-5500Hz	12" Microphone w/ Power Cable Microphone with Amplifier	45" Microphone w/Video & Power Microphone with Amplifier	VGA Extension Cable 10ft VGA Extension Cable 25ft VGA Extension Cable 50ft VGA Extension Cable 100ft



Converters, Splitters, Switches, Extenders



<b>LTA1012</b> RS-232 to RS-485 Converter A Port Powered RS-232 to RS-485 Converter	<b>LTAVB0VA6</b> BNC to VGA Converter Convert BNC Output to VGA Display Monitor Support 1920x1080	<b>LTAH014L</b> 1 in/4 out HDMI Splitter Support HDMI 1.3 Support 1080P HDCP & 3D Support	<b>LTAH018L</b> 1 in/8 out HDMI Splitter 8 Identical HDMI Outputs Up to 225MHz Support 3D	<b>LTAH2100E</b> USB RJ45 Extender USB2, USB A Female Plug & Play Cable Type: CAT5,5E,6, UTP Extend Distance to 150ft	<b>LTAH103C</b> POS IP Server
---	---	---	---	--	----------------------------------



<b>LTAH3100E</b> VGA/Audio RJ45 Extender Video Type: VGA Support 1920x1440 1x Stereo Audio (R/L) Extend Distance to 900ft	<b>LTAH1050E</b> HDMI Extender using 1xRJ45 Cable Signal Rates up to 1.65Gbps Supports 1080P Up to 100ft	<b>LTAH5100T</b> HD-TVI To HDMI Converter Input: 1xHD-TVI Output:1xHDMI,1xHD-TVI loop out	<b>LTAH5300T</b> HD-TVI Distributor Input: 1xHD-TVI Output:3xHD-TVI
--	---	--	--

Tools



<b>T201WS</b> Coaxial Cable Stripper Cut & Strip Coaxial Cable Durable Delrin Material Rotating Ring	<b>T203MS</b> Wire Stripper Strip Wire (12 - 22 gauge) with One Pull of Trigger Built-in Ruler Splicer with Auto Adjust	<b>T205CM</b> Professional Crimping Tool BNC Compression, F-Type, RCA Connectors For CATV, DSS sec. and Residential Cable Connection	<b>LTA-T206S</b> 4 in 1 Wire Cutter & Stripper Easy to Strip & Cut Wire One Lock Control (open/close) AWG 24.22.20.18.16.14.12	<b>LTA-T208CS</b> Multi-Modular Plug Crimp, Strip and Cut Tool Pro Modular Crimp Tool with Cut and Strip Crimp types: 8P8C, 6P6C, 4P4C	<b>LTA-T207C</b> Coaxial Crimping Tool Hex Tool for BNC F-type Crimp on Connector
--	--	---	--	--	---

Dummy Cameras



<b>DUM-301E</b>	<b>DUM-301EB</b>	<b>DUM-101E</b>	<b>DUM-501E</b>	<b>DUM-501EB</b>	<b>DUM-701E</b>
-----------------	------------------	-----------------	-----------------	------------------	-----------------

LTS Meets Industry Standards



A global standard for the interface of IP based physical security products

Global forum for development, enhancement, storage, dissemination, and implementation of security standards for account data protection

American Worldwide safety consulting and certification. LTS complies with multiple certification numbers.



DS-2CD2122FWD-IS(B) DS-2CD2142FWD-IS(B)	DS-2CD2322WD-I DS-2CD2342WD-I	DS-2CD2722FWD-IZS(B) DS-2CD2742FWD-IZS(B)	DS-2CD2032-I	DS-2CE56D1T-VP1R(B)
<b>2MP, 4MP</b>	<b>2MP, 4MP</b>	<b>2MP, 4MP</b>	<b>3MP</b>	<b>2MP</b>
<b>Value Plus Solution Network Outdoor Dome Camera</b>	<b>Value Plus Solution Network Outdoor Turret Camera</b>	<b>Value Plus Solution Network Outdoor Dome Camera</b>	<b>Value Solution Network Outdoor Bullet Camera</b>	<b>TurboHD Analog Outdoor Dome Camera</b>
<ul style="list-style-type: none"> <li>• 2.8/4/6mm fixed lens</li> <li>• H.264+/H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• 100ft IR range max</li> <li>• Motion detection</li> <li>• MicroSD 128 GB max</li> <li>• IP67, IK10, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8/4/6mm fixed lens</li> <li>• H.264+/H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• EXIR with 100ft range max</li> <li>• Motion detection</li> <li>• IP67, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8-12mm motorized lens</li> <li>• H.264+/H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• 100ft IR range max</li> <li>• Motion detection</li> <li>• MicroSD 128 GB max</li> <li>• IP67, IK10, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 4/6/12mm fixed lens</li> <li>• H.264/MJPEG</li> <li>• Digital WDR</li> <li>• 100ft IR range max</li> <li>• Motion detection</li> <li>• IP66, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8/3.6/6mm fixed lens</li> <li>• HD-TVI video out</li> <li>• 60ft IR range max</li> <li>• True Day/Night</li> <li>• IP66, IK10, UL/cUL Listed</li> </ul>
PC110 Pendant Cap CB110 Conduit Base AB110 Angled Base WM110 Wall Mount	PC130T Pendant Cap CBM Conduit Base ABM Angled Base	PC135 Pendant Cap CB135 Conduit Base AB135 Angled Base	CBXS Conduit Base	PC110 Pendant Cap CB110 Conduit Base AB110 Angled Base WM110 Wall Mount



DS-2CE56D5T-IT3(B)	DS-2CE56D1T-IRM(B)	DS-7608NI-E2-8P DS-7616NI-E2-16P	DS-7608NI-I2-8P DS-7616NI-I2-16P	DS-7208HGHI-SH DS-7216HGHI-SH
<b>2MP</b>	<b>2MP</b>			
<b>TurboHD Analog Outdoor Turret Camera</b>	<b>TurboHD Analog Outdoor Turret Camera</b>	<b>Value Solution Plug-and-Play NVR</b>	<b>Value Solution Plug-and-Play NVR</b>	<b>Value Solution Tribrid DVR</b>
<ul style="list-style-type: none"> <li>• 2.8/3.6/6/12mm fixed lens</li> <li>• HD-TVI video out</li> <li>• 120dB WDR</li> <li>• 120ft IR range max</li> <li>• True Day/Night</li> <li>• IP66, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8/3.6/6mm fixed lens</li> <li>• HD-TVI video out</li> <li>• 60ft IR range max</li> <li>• True Day/Night</li> <li>• IP66, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 6 MP max recording resolution</li> <li>• H.264+/H.264</li> <li>• 1920x1080P HDMI/VGA output</li> <li>• 4-ch/1-ch alarm input/output</li> <li>• Max 12 TB internal storage (2 x 6 TB)</li> <li>• 8-port/16-port 802.3af/at PoE switch</li> <li>• 120W/200W PoE budget</li> <li>• UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 12 MP max recording resolution</li> <li>• H.265+/H.265/H.264+/H.264/MPEG4</li> <li>• 3840x2160P/1920x1080P HDMI/VGA output</li> <li>• 4-ch/1-ch alarm input/output</li> <li>• Max 12 TB internal storage (2 x 6 TB)</li> <li>• 8-port/16-port 802.3af/at PoE switch</li> <li>• 120W/200W PoE budget</li> <li>• UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2 MP max recording resolution</li> <li>• H.264</li> <li>• 1920x1080P HDMI/VGA output</li> <li>• 8-ch/4-ch, 16-ch/4-ch alarm input/output</li> <li>• Max 12 TB internal storage (2 x 6 TB)</li> <li>• Supports Up to 2 x 2MP IP Cameras</li> </ul>
PC130T Pendant Cap CBM Conduit Base ABM Angled Base	PC110T Pendant Cap CBXS Conduit Base			

# Save More on Hikvision with LTS

[LTSecurityinc.com/Hikvision](http://LTSecurityinc.com/Hikvision)



- Full Access to Hikvision Product Line
- In-House Certified Hikvision Experts



**HIKVISION** | AUTHORIZED DISTRIBUTOR

# HIKVISION - H.265+ and TurboHD 4.0 Solutions



DS-2CD2125FWD-I DS-2CD2135FWD-I DS-2CD2155FWD-I DS-2CD2185FWD-I	DS-2CD2325FWD-I DS-2CD2335FWD-I DS-2CD2355FWD-I DS-2CD2385FWD-I	DS-2CD2625FWD-IZS DS-2CD2635FWD-IZS DS-2CD2655FWD-IZS DS-2CD2685FWD-IZS	DS-7732NI-I4 DS-7732NI-I4-16P	DS-9616NI-I8 DS-9632NI-I8 DS-9632NI-I16 DS-9664NI-I8
<b>2MP, 3MP, 5MP, 8MP</b>	<b>2MP, 3MP, 5MP, 8MP</b>	<b>2MP, 3MP, 5MP, 8MP</b>		
<b>Value Plus Solution H.265+ Network Outdoor Dome Camera</b>	<b>Value Plus Solution H.265+ Network Outdoor Turret Camera</b>	<b>Value Plus Solution H.265+ Network Outdoor Bullet Camera</b>	<b>Value Solution Plug-and-Play NVR</b>	<b>Professional Solution NVR</b>
<ul style="list-style-type: none"> <li>• 2.8/4/6/8mm fixed lens</li> <li>• H.265+/H.265/H.264+/H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• EXIR 2.0 with 100ft IR range max</li> <li>• MicroSD 128 GB max</li> <li>• IP67, IK10, UL/cUL Listed</li> <li>• DarkFighter (2MP, 3MP)</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8/4/6/8mm fixed lens</li> <li>• H.265+/H.265/H.264+/H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• EXIR 2.0 with 100ft IR range max</li> <li>• MicroSD 128 GB max</li> <li>• IP67, UL/cUL Listed</li> <li>• DarkFighter (2MP, 3MP)</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8-12mm motorized lens</li> <li>• H.265+/H.265/H.264+/H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• EXIR 2.0 with 100ft IR range max</li> <li>• MicroSD 128 GB max</li> <li>• IP67, IK11, UL/cUL Listed</li> <li>• DarkFighter (2MP, 3MP)</li> </ul>	<ul style="list-style-type: none"> <li>• 12 MP max recording resolution</li> <li>• H.265+/H.265/H.264+/H.264/MPEG4</li> <li>• 3840x2160P/1920x1080P HDMI/VGA output</li> <li>• 16-ch/4-ch alarm input/output</li> <li>• Max 24 TB internal storage (4 x 6 TB)</li> <li>• 16-port 803.af/at PoE switch (-16P)</li> <li>• 200W PoE budget (-16P)</li> <li>• UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 12 MP max recording resolution</li> <li>• H.265+/H.265/H.264+/H.264/MPEG4</li> <li>• 3840x2160P/1920x1080P HDMI1/VGA1 output</li> <li>• 1920 x 1080p/1920 x 1080P HDMI2/VGA2 output</li> <li>• 16-ch/4-ch alarm input/output</li> <li>• 16-ch/8-ch alarm input/output (DS-9632NI-I16)</li> <li>• Max 48 TB internal storage</li> <li>• Max 96 TB internal storage (DS-9632NI-I16)</li> <li>• UL/cUL Listed</li> </ul>
PC110 Pendant Cap CB110 Conduit Base AB110 Angled Base WM110 Wall Mount	PC130T Pendant Cap CBM Conduit Base ABM Angled Base	CB130 Conduit Base		



DS-2CE56H1T-VPIT(B)	DS-2CE16H1T-IT1 DS-2CE16H1T-IT3 DS-2CE16H1T-IT5	DS-2CE56H1T-IT3	DS-7308HUI-K4 DS-7316HUI-K4 DS-7332HUI-K4	DS-9008HQHI-SH DS-9016HQHI-SH
<b>5MP</b>	<b>5MP</b>	<b>5MP</b>		
<b>TurboHD 4.0 HD-TVI Outdoor Dome Camera</b>	<b>TurboHD 4.0 HD-TVI Outdoor Bullet Camera</b>	<b>TurboHD 4.0 HD-TVI Outdoor Turret Camera</b>	<b>Professional Solution TurboHD 4.0 Tribrid DVR</b>	<b>Professional Solution TurboHD 4.0 Tribrid DVR</b>
<ul style="list-style-type: none"> <li>• 2.8/3.6/6mm fixed lens</li> <li>• HD-TVI video out</li> <li>• 120dB WDR</li> <li>• EXIR with 50ft IR range max</li> <li>• True Day/Night</li> <li>• IP67, IK10, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8/3.6/6/12mm fixed lens</li> <li>• HD-TVI video out</li> <li>• 120dB WDR</li> <li>• EXIR with 60ft/120ft/240ft IR range max</li> <li>• True Day/Night</li> <li>• IP67, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2.8/3.6/6/12mm fixed lens</li> <li>• HD-TVI video out</li> <li>• 120dB WDR</li> <li>• EXIR with 120ft IR range max</li> <li>• True Day/Night</li> <li>• IP67, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 5 MP max recording resolution</li> <li>• H.265+/H.265/H.264+/H.264</li> <li>• 3840x2160P/1920x1080P HDMI/VGA output</li> <li>• 16-ch/4-ch alarm input/output</li> <li>• Max 32 TB internal storage (4 x 8 TB)</li> <li>• UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 2 MP max recording resolution</li> <li>• H.265+/H.265/H.264+/H.264</li> <li>• 3840x2160P/1920x1080P HDMI/VGA output</li> <li>• 16-ch/4-ch alarm input/output</li> <li>• Max 48 TB internal storage (6 x 8 TB)</li> <li>• UL/cUL Listed</li> </ul>
PC110 Pendant Cap CB110 Conduit Base WM110 Wall Mount	CBS Conduit Base	PC110 Pendant Cap CBS Conduit Base ABS Angled Base WML Wall Mount		

## Exclusive Sale

# Love Tuesday Sale

LTSecurityinc.com/Hikvision



**HIKVISION** AUTHORIZED DISTRIBUTOR

Maryland  
240-493-8988

New York  
646-558-3888

Illinois  
630-348-8088

Illinois - Chicago  
312-800-0766

Texas - Dallas  
469-289-5780

Arizona  
877-284-2890



<b>DS-2DF6223-CX</b>	<b>DS-2DP1636Z-D</b>	<b>DS-2DY5223IW-AE</b>	<b>DS-2TD2166-7/15/25/35</b>	<b>DS-2CD63C2F-IV</b>
<b>2MP</b>	<b>16MP</b>	<b>2MP</b>		<b>12MP</b>
<b>Smart Pro Series Specialty Outdoor Explosion Proof PTZ</b>	<b>Smart Pro Series Multi-Sensor Outdoor Panovu</b>	<b>Smart Pro Series Specialty Outdoor PTZ</b>	<b>Smart Pro Series Network Thermal Bullet Camera</b>	<b>Smart Series Network Outdoor Fisheye Camera</b>
<ul style="list-style-type: none"> <li>• 5.9-135.7mm motorized lens</li> <li>• H.265+/H.265/H.264+/H.264</li> <li>• 120dB WDR</li> <li>• 23x Optical zoom</li> <li>• Electronic image stabilization</li> <li>• MicroSD 128 GB max</li> <li>• IP68, 304L</li> </ul>	<ul style="list-style-type: none"> <li>• 8 x 5mm lens with 360° pan range</li> <li>• 5.7-205mm lens PTZ with 36x zoom</li> <li>• H.264/MJPEG</li> <li>• 36x Optical zoom</li> <li>• 3D DNR, BLC, AWB, WDR, EIS, Defog</li> <li>• MicroSD 128 GB max</li> <li>• IP66, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 5.9-135.7mm motorized autofocus lens</li> <li>• H.264/MJPEG</li> <li>• 120dB WDR</li> <li>• 23x Optical zoom</li> <li>• 450ft IR range max</li> <li>• MicroSD 128 GB max</li> <li>• IP66, UL/cUL Listed</li> <li>• DarkFighter</li> </ul>	<ul style="list-style-type: none"> <li>• Vanadium oxide UFPA thermal sensor</li> <li>• 640 x 512P</li> <li>• 7/15/25/35mm lens</li> <li>• &lt; 40mK NETD (Noise Equivalent Temperature Difference)</li> <li>• 3D DNR, adaptive AGC, DDE image enhancement</li> <li>• 10 accurate fire detection</li> <li>• MicroSD 64 GB max</li> <li>• IP66, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 1.98mm fixed lens</li> <li>• H.264+/H.264/MJPEG</li> <li>• Digital WDR</li> <li>• 45ft IR range max</li> <li>• MicroSD 128 GB max</li> <li>• IP67, IK10, UL/cUL Listed</li> <li>• Built-in speaker and mic</li> </ul>
		WBPT-S Wall Bracket		PC-FE Pendant Cap CB-FE Conduit Base AB-FE, AB-FE45 Angled Base



<b>DS-2CD4A26FWD-IZHS-P</b> <b>DS-2CD4A26FWD-IZHS8P</b>	<b>iDS-9632NXI-I8-16S</b>	<b>DS-KV8102-IM</b> <b>DS-KV8202-IM</b> <b>DS-KV8402-IM</b>	<b>DS-KH8300-T</b> <b>DS-KH8301-WT</b>	<b>HIKCENTRAL</b>
<b>2MP</b>				
<b>Smart Series Network License Plate Recognition Camera</b>	<b>DeepInMind Series NVR</b>	<b>Intercom IP Villa Door Station</b>	<b>Intercom IP Indoor Station</b>	<b>Windows-based Central Management Software (CMS)</b>
<ul style="list-style-type: none"> <li>• 2.8-12mm/8-32mm motorized lens</li> <li>• H.264+/H.264/MPEG4/MJPEG</li> <li>• 120dB WDR</li> <li>• 150ft/300ft IR range max</li> <li>• MicroSD 128 GB max</li> <li>• IP67, UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• Deep learning technology</li> <li>• 12 MP max recording resolution</li> <li>• H.265+/H.265/H.264+/H.264/MPEG4</li> <li>• 3840x2160P/2560x1440P HDMI1/VGA1 output</li> <li>• 1920 x 1080p/1920 x 1080p HDMI2/VGA2 output</li> <li>• 16-ch/8-ch alarm input/output</li> <li>• Max 64 TB internal storage</li> <li>• UL/cUL Listed</li> </ul>	<ul style="list-style-type: none"> <li>• 1280 x 720P</li> <li>• H.264</li> <li>• Built-In IC card reader</li> <li>• Batch configuration up to 256 cards</li> <li>• 4 I/O input and 1 I/O output</li> <li>• Remotely reboot and upgrade via client or App</li> <li>• Remotely unlock via client or App</li> <li>• Remotely answer call via client or App</li> </ul>	<ul style="list-style-type: none"> <li>• 1024 x 600P 7" TFT LCD</li> <li>• Capacitive Touch Screen</li> <li>• 8-ch Alarm Input Sensor</li> <li>• 2 I/O output</li> <li>• MicroSD 32 GB max</li> <li>• Remotely unlock via client or App</li> <li>• 0.3MP Camera (DS-KH8301-WT)</li> <li>• WiFi (DS-KH8301-WT)</li> </ul>	<ul style="list-style-type: none"> <li>• Max 1024 IP Cameras/NVRs/DVRs</li> <li>• Max 3000 channels</li> <li>• Max 3000 alarm input or output</li> <li>• Max concurrently 100 mobile and 100 web client connections</li> <li>• Server available (optional)</li> </ul>
CB130, CBS Conduit Base		DS-KAB02 Wall Mount	DS-KAB21-H Desktop Stand	

LTSecurityinc.com/Hikvision



# Bid to Win!

Gain Advantages with HDP

Sign Up with Your In-House Certified Hikvision Expert

## Existing HDP Customer?

Add LTS to my HDP program

## New to HDP?

We'll help check to see if you qualify



California - Los Angeles  
626-435-2838

New Jersey  
856-780-9888

Texas - Houston  
713-587-1800

California - San Francisco  
510-201-9868

Florida - Miami  
786-693-1813

Georgia  
678-710-3788



## A 4K FEAST FOR YOUR EYES-IN-THE-SKY

Purpose-built storage for all mainstream high-definition DVR and NVR surveillance systems



**WD PURPLE™**  
SURVEILLANCE DRIVE  
**DRIVE TO CAPTURE**

- Available capacities include: 500GB, 1TB, 2TB, 3TB, 4TB, 6TB, 8TB, and 10TB
- Enhanced performance with AllFrame 4K™ technology
- Up to 3X the workload rate of desktop drives
- Engineered for compatibility in a wide range of surveillance systems
- Supports more than 8 bays (4TB and larger) and up to 64 cameras per drive
- Low power and quiet operation
- Designed with tarnish-resistant components for premium protection in harsh environments (4TB and larger)
- Enables upgrades and expansion of existing surveillance systems

## THE GOLD STANDARD FOR VIDEO ANALYTICS

Increased reliability and balanced performance for video analytics servers and high-capacity back-end surveillance storage



**WD GOLD™**  
ENTERPRISE-CLASS DRIVE  
**DRIVE TO ENDURE**

- Available capacities include: 4TB, 6TB, 8TB, 10TB, and 12TB with an MTBF rating of 2.5 million hours\*
- Designed with a workload rating up to 550TB per year
- StableTrac™ and RAFF™ for enhanced vibration tolerance
- 7200 RPM Class performance
- Designed for 24x7x365 operation

\* Available capacities include: 4TB, 6TB, 8TB, 10TB, and 12TB with an MTBF rating of 2.5 million hours



WD, the WD logo, AllFrame 4K, RAFF, StableTrac, WD Gold and WD Purple are registered trademarks or trademarks of Western Digital Corporation or its affiliates in the U.S. and/or other countries. All other marks are the property of their respective owners. As used for storage capacity, one gigabyte (GB) = one billion bytes and one terabyte (TB) = one trillion bytes. Total accessible capacity varies depending on operating environment. Product specifications subject to change without notice. Pictures shown may vary from actual products. Not all products are available in all regions of the world. © 2017 Western Digital Corporation or its affiliates. All rights reserved.

**Call for price. Available up to 12TB**

## Scalable. Responsive. Innovative. Most Powerful Fleet for Surveillance Video Analytics

Exos enterprise hard drives are designed for hyperscale efficiency and ever-evolving security mandates. You can always rely on Exos for maximum capacity/density, scalability, power efficiency and security.

The Exos Enterprise HDD is built for following application with workload rating up to 550TB/year:

- Video Analytics Servers
- High-Capacity Scale Surveillance Storage



Available up to 12TB

Maryland  
240-493-8988

New York  
646-558-3888

Illinois  
630-348-8088

## Smart. Safe. Secure. Seagate Surveillance-Optimized Storage

SkyHawk™ is built to keep systems in the field longer and reduce the need for post-deployment support. The ImagePerfect™ firmware enables multi-stream, write intensive workloads for SDVR and NVR delivering reliable video image integrity & reduction of frame loss in 24x7 recording usage at surveillance workloads up to 180TB/year.

The SkyHawk HDD is a best-fit for the following applications with a workload rating of up to 180TB/year:

- NVR - network video recorder
- Embedded DVR
- Hybrid DVR
- PC-Based DVR



Illinois - Chicago  
312-800-0766

Texas - Dallas  
469-289-5780

Arizona  
877-284-2890

# Helix 100% Wireless Intrusion Alarm & Home Automation Platform



LTRE927RSA	LTRE928RSV	LTRE934Z
GSM Expansion Card	CDMA Expansion Card	Helix Z-Wave Expansion Card



LTRE6100S	LTRE622	LTRE600	LTRE609	LTRE656	LTRE610
Helix Wireless Alarm Panel	NanoMax Door/Window Sensor	Helix Keyfob	Glass Break Wireless	Helix Keypad E-Link Display	PIR Motion Pet Immunity

## High Performance X86 Platform with Redundant PS

- High-Grade Hardware Server
- Comprehensive Expansibility
- High Performance
- End-to-End Support



System	PNS4208R	PNS4316R	PNS4424R
Price			
CPU / Speed	Intel® Celeron™ N3160 Processor (Base Frequency 1.60 GHz, up to 2.24GHz)	Intel® Core™ i7-6700 Processor (Base Frequency 3.40 GHz, up to 4.00 GHz)	Intel® Core™ i7-6700 Processor (Base Frequency 3.40 GHz, up to 4.00 GHz)
Memory	DDR3, 4 GB	DDR4, 2 channels have 8 GB respectively. Total 16 GB.	DDR4, 2 channels have 8 GB respectively. Total 16 GB.
Drive / Storage	8 SATA HDDs up to 64TB, Hot-swap, Online replacement	16 SATA/SAS HDDs up to 128TB, Independent HDD bracket, Hot-swap, Online replacement	24 SATA/SAS HDDs up to 192TB, Independent HDD bracket, Hot-swap, Online replacement
IP Video Inputs	32CH	64CH	128CH
Max Input/Record	384Mbps/384Mbps		512Mbps/512Mbps
I / O	2 Gigabit Ethernet: 2 x RJ-45 (10/100/1000Mbps). USB: 2 x USB2.0 on front panel, 1 x USB2.0 on rear panel, 1 x USB3.0 on rear panel, 1 x eSATA port on rear panel. Serial Interface: 1 x RS232 serial port.	4 Gigabit Ethernet: 4 x RJ-45 (10/100/1000Mbps). USB: 2 x USB2.0 on front panel, 2 x USB3.0 on rear panel, 1 x eSATA port on rear panel. SAS Interface: 2 x SAS3.0 port, for storage expansion. Serial Interface: 1 x 3.5mm serial port. Alarm Port: 16 x alarm input port, 8 x alarm output port.	4 Gigabit Ethernet: 4 x RJ-45 (10/100/1000Mbps). USB: 2 x USB2.0 on front panel, 2 x USB3.0 on rear panel, 1 x eSATA port on rear panel. SAS Interface: 2 x SAS3.0 port, for storage expansion. Serial Interface: 1 x 3.5mm serial port. Alarm Port: 16 x alarm input port, 8 x alarm output port.
Expansion		1 x PCI-E3.0 x8; Optional 4 x Gigabit RJ-45/optical port, Optional 2 x 10GE optical port	
Video & Audio	2 x HDMI Output up to 3840x2160, 1 x VGA up to 1920x1080, 1 x Audio input, 1 x Audio output	3 x HDMI Output up to 3840x2160, 1 x VGA up to 1920x1080, 1 x Audio in, 1 x Audio out	
Power Input	AC 110V ~ 240V, 50 ~ 60Hz, 1+1 redundant	AC 110V ~ 240V, 50 ~ 60Hz, Hot-swap. 1+1 redundant, 550W CRPS Current-Sharing Power Supply	
Operating Systems	Microsoft Windows OS		
VMS Licenses	32 channel Professional licenses Included	64 channel Professional licenses Included	128 channel Professional licenses Included

NA-SLE-CDMA (Verizon)  
 NA-SLE-GSM-3/4G (AT&T)



LTSecurityinc.com/NAPCO



Authorized Distributor

**Mercantile/Metal**

NA-SLECDMA-CB  
 NA-SLE3/4G-CB  
 NA-SLECDMAI-CB



**Plugin Xformer**

NA-SLECDMA-CB-TF  
 NA-SLE3/4G-CB-TF  
 NA-SLECDMAI-CB-TF

Napco starlink alarm communicators for universal cell &/or ip reporting - sole or dual path models

- universal – work on all panels and applications
- report to any central station via dial-up or ip
- work with all contact id and 4/2 reporting formats

- Nationwide coverage AT&T or Verizon cdma – works even in fringe areas
- Full data primary or backup reporting
- Easiest, fastest installation & activation with auto-dialer capture
- Powered by panel, low current 71ma. (no separate power supply required.) mercantile models also available in locking metal enclosure.
- Generous tradeup incentive offer on unlimited radios

NA-SLE-CDMA-C  
 NA-SLE-CDMA-Z



NA-SLE-CDMA-FIRE  
 NA-SLE-GSM-FIRE



One and done: takeover & connected home upgrade for virtually any account:

- upgrade accounts' alarm reporting from older networks to choice of verizon network certified or at&t
- generous trade-up incentive available when you upgrade from old radios, networks or landlines see [napcosecurity.com/starlink](http://napcosecurity.com/starlink)
- upgrade/takeover virtually any existing alarm system – provide the very latest features & the smartphone remote interactive control today's consumers want
- use with your favorite panel brand(s) ‡ & any central station

- choice of Verizon network certified® or AT&T® network models
- smart remote virtual keypad & sms/mms text & live video notifications using any/all keypad bus activities & events - powered by ibridge® (app on iTunes® & Google Play®) ‡ • 'z-option' models also include built-in z-wave device control Upload / download, virtual keypad control, ibridge messenger notifications, connected home support
- Compatible with Napco, Honeywell, DSC

GEM-P1632, GEM-DK1CA  
 , (3) GEM-TRANSLP  
 WIRELESS TRANSMITTER,  
 GEM-RECV32, GEM-PIRPET,  
 GEM-KEYF



GEM-P1632, GEM-K4RF,  
 PIR1680PT, 16-32 HYBIRD  
 ZONES, SIREN, POWER  
 SUPPLY/BATTERY



NA-GEM-SS311

NA-GEM-K120PAK

**#1 Buy Any StarLink**

Buy any StarLink Radio and get \$100 back off its low everyday dealer price.

**#2 Activate Online**

Register online at [www.napcocommnet.com](http://www.napcocommnet.com) and activate any StarLink Cellular &/or IP Communicator.

**#3 Tell Us What You're Upgrading From**

Provide this Form & Verify w/ Any One of these:  
 Send in SIM Card from Old Radio or For Brands w/o SIMs (HFI, AHS, etc.) - Photo of Brand/Model/Serial No./ID, or POTV/Landlines - Carrier Name & X-Phone Nos. Mail to Napco StarLink.

**#4 Get \$100**

Napco Will Credit Your Monthly StarLink Radio Account \*\*\$100 USD\*\* and send you an email confirmation (see full details below to [www.napcosecurity.com/contact/StarLink4GUpgrade](http://www.napcosecurity.com/contact/StarLink4GUpgrade))

Also See Rules/Regs. Below:  
**Unlimited Upgrades - Just repeat steps 1 - 4 above. For ADDITIONAL FORMS go online [www.napcosecurity.com/contact/StarLink4GUpgrade](http://www.napcosecurity.com/contact/StarLink4GUpgrade)**



Video Solutions for Security Professionals™

### California - Los Angeles

18738 San Jose Ave.  
City of Industry, CA 91748  
Toll Free: 888-587-5871  
Tel: 626-435-2838  
Fax: 626-435-2801  
Email: Support.LosAngeles@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (PST): MON - FRI  
*En LTS California hablamos español*

### Illinois

1459 Elmhurst Rd.  
Elk Grove Village, IL 60007  
Tel: 630-348-8088  
Fax: 847-979-8385  
Email: Support.Chicago@LTSecurityinc.com  
Sales Office: 9am - 6pm (CST): MON - FRI  
*En LTS Illinois hablamos español*

### Maryland

4501 Forbes Blvd., Suite 1  
Lanham, MD 20706  
Tel: 240-493-8988  
Fax: 240-764-8685  
Email: Support.Maryland@LTSecurityinc.com  
Sales Office: 8am - 5pm (EST): MON - FRI  
*En LTS Maryland hablamos español*

### Arizona

4141 S. 36th St, Suite 150  
Phoenix, AZ 85040  
Toll Free: 877-284-2890  
Tel: 602-903-2220  
Email: Support.AZ@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (MST): MON - FRI  
*En LTS Arizona hablamos español*

### Texas - Plano

**COMING SOON**  
6905 K Avenue, Suite 211  
Plano, TX 75074  
Email: Support.Dallas@LTSecurityinc.com  
Sales Office: 8AM-5PM (CST) MON-FRI  
*En LTS Plano hablamos español*

### New Jersey

109 West Park Dr., Suite C  
Mount Laurel, NJ 08054  
Toll Free: 855-835-8889  
Tel: 856-780-9888  
Fax: 856-222-0059  
Email: Support.NewJersey@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (EST): MON - FRI

### California - San Francisco

38507 Cherry Street, Suite G  
Newark CA 94560  
Toll Free: 888-216-2812  
Tel: 510-201-9868  
Fax: 510-742-3251  
Email: Support.SanFrancisco@LTSecurityinc.com  
Sales Office: 9am - 6pm (PST): MON - FRI

### Texas - Dallas

1100 Valwood Pkwy., Suite 112  
Carrollton, TX 75006  
Tel: 469-289-5780  
Fax: 972-242-2228  
Email: Support.Dallas@LTSecurityinc.com  
Sales Office: 8am - 5pm (CST): MON - FRI  
*En LTS Dallas hablamos español*

### Georgia

5933 Peachtree Industrial Blvd, Suite B.  
Norcross, GA 30092  
Tel: 678-710-3788  
Fax: 770-558-6806  
Email: Support.GA@LTSecurityinc.com  
Sales Office: 9am - 6pm (EST): MON - FRI  
**GRAND OPENING**

### Texas - Houston

8634 Westpark Dr.  
Houston, TX 77063  
Tel: 713-587-1800  
Fax: 713-587-1801  
Email: Support.Houston@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (CST): MON - FRI  
*En LTS Houston hablamos español*

### New York

99 Seaview Blvd., Suite 1B  
Port Washington, NY 11050  
Toll Free: 888-517-3102  
Tel: 646-558-3888  
Fax: 718-366-2296  
Email: Support.NewYork@LTSecurityinc.com  
Sales Office: 9am - 6pm (EST): MON - FRI  
*En LTS New York hablamos español*

### Florida

8400 NW 25th St., Suite 110  
Miami, FL 33122  
Tel: 786-693-1813  
Fax: 786-631-3639  
Email: Support.Florida@LTSecurityinc.com  
Sales Office: 8:30am - 6pm (EST): MON - FRI  
*En LTS Florida hablamos español*

### Illinois - Chicago

2463 S Archer Ave  
Chicago, IL 60616  
Tel: 312-800-0766  
Fax: 630-348-8158  
Email: Support.Chicago@LTSecurityinc.com  
Sales Office: 8:30am - 5:30pm (CST): MON - FRI  
**GRAND OPENING**

**All-New Call Center at LTS!**  
With our dedicated in-house technical staff, expect greater satisfaction!  
We care. Your call is important to us.



## Experience LTS Technologies

 Deep Learning	 Face Detection	 Intrusion Detection	 Line Crossing Detection	 Object Removal Detection	 Unattended Baggage Detection	 POS	 Email Notifications	 On Board Storage 128GB	 Smart Tracking	 PCI
 RAID	 4K	 Starlight	 5MP-6MP FREE Upgrade	 PT Cloud	 Extended PoE (800ft)	 5-1 Pentra Hybrid	 Matrix IR 2.0	 Free DDNS	 Video Verification	 People Counting

## Shop Top Brands



www.LTSecurityinc.com