







fspusafallprotection.com | (P) 704-262-7893 | (F) 704-262-9051
 322 Industrial Court, Concord, NC 28025

TECHNICAL DATA SHEET

SAFELINK

FS-EX2502

SafeLink Form Link Bracket

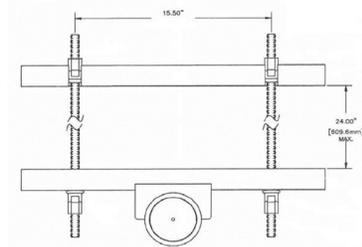

Description Form Link Bracket for use with the SafeLink Horizontal Lifeline System.

Applications:

- 1) Clamped around rebar
- 2) Clamped around a finished column
- 3) Mounded on a finished wall

See SafeLink User Manual for installation instructions.

****Visually Inspect The Unit Before Installation****

Length 28 in (711.2 mm)

Height 24 in (609.6 mm)

Width 3.75 in (95.25 mm) Inside, 4.5 in (114.3 mm) Outside (Pole Receptor)

Material 6061-T6511 Aluminum

Working Load 310 lbs/person; Up to 4-person SafeLink System

Minimum Tensile Strength 5,000 lbs (2267.96 kg)

Weight 26 lbs (11.79 kg))

Applicable Standards Meets OSHA 1926-502, ANSI Z359.1-2007, ANSI A10.32 2012