



*Heritage™
Freestanding
Gas Stove &
Heritage Bay™
Gas Fireplace
Insert*



HERITAGE BAY DVL FS

Direct Vent Gas Large Freestanding Stove



The Heritage Bay DVL gas stove shown in the inset features the standard black bayview door and optional gold grill.

The Heritage Bay DVL Freestanding Stove is perfect for this bedroom and features the optional 24 karat gold door and gold grill.

The Heritage Bay™ DVL Freestanding Stove features a remarkable balance of beauty and performance. It generates up to 43,000 BTU's per hour, yet offers an efficiency of 79% with natural gas and 81% with propane. An Advanced three-tier tube burner and one-piece cast "Fire-Pit"® log system produce realistic flames dancing above glowing embers and a cast firebrick floor. A state-of-the-art ignition system keeps the fire burning even when your electricity fails. Add splendor to the flames with an optional cast "Garland" fireback, or enhance the arched bayview door and decorative grill with 24 karat gold finish. A powerful variable speed blower and, remote control or wall thermostat are also available, making the Heritage Bay DVL Freestanding Stove a truly complete home heating system.

Cast "Garland" Fireback

Heats
When
Power G

Huge
Wind
Firev

24 K
Gold
Opt

Decor
Cast M
De

Remote
& W
Therm
Rec

7-Year V



HERITAGE BAY BV FI

B-Vent Gas Fireplace Insert

Even
n The
goes Out

e Bay
dow
view

Karat
Door
tion

rative
olding
tail

s Control
Wall
mostat
ady

Warranty



The Heritage Bay B-Vent Fireplace Insert warms this living room and features goldenfire brown paint finish and rectangular facing panels.

The Heritage Bay™ B-Vent Fireplace Insert adds elegance and warmth to your existing unefficient masonry or metal zero clearance fireplace. Its unique two-stage heat exchange system generates up to 40,000 BTU's with uncommon efficiency, and a powerful blower helps distribute heat evenly throughout your home. The flames are mesmerizing as they blaze over realistic log set and glowing embers scattered over the firebox floor. Even when your electricity fails, the Heritage Bay B-Vent Insert will operate. Enjoy the fire through a gracefully arched 24 karat gold bayview door accented by decorative gold grill. Enhance the charm of the fire even more by installing an optional arched or rectangular fireplace finish panels. A remote control or wall thermostat is also available, further distinguishing the Heritage Bay B-Vent Fireplace Insert as a beautiful yet sensible home heater.

HERITAGE FREESTANDING STOVE & HERITAGE BAY FIREPLACE INSERT

Heritage DVL FS Freestanding Stove

NOTE: Gas appliance performance can be affected by prevailing atmospheric conditions.

Heating Capacity	Overall Efficiency	Input (Adjustable)	Room Fan	Chimney	Standing Pilot	Safety Feature
Up to 2000 sq. ft	86 % NG with maximum venting configuration 78 % NG with maximum venting configuration	NG - 23,000 to 43,000 Btu's/Hr. LP - 23,000 to 43,000 Btu's/Hr.	170 CFM Standard	6 5/8" DuraVent Direct Vent	Generates Electricity to Allow Operation Even During Power Outages	30 Second Thermocouple Dropout


HEATING CAPACITY: May vary depending on the degree of home insulation, floor plan and the ambient temperature zone of the area in which you live.

Heritage Bay B-Vent Fireplace Insert


Heating Capacity	Overall Efficiency	Input (Adjustable)	Room Fan	Chimney	Standing Pilot	Safety Feature
Up to 1600 sq. ft	Up to 80 % NG & 82 % LP	NG - 23,000 to 40,000 Btu's/Hr. LP - 20,000 to 38,000 Btu's/Hr.	130 CFM Standard	4" B-Vent Liner	Generates Electricity to Allow Operation Even During Power Outages	30 Second Thermocouple Dropout

HEATING CAPACITY: May vary depending on the degree of home insulation, floor plan and the ambient temperature zone of the area in which you live.

Freestanding Stove Dimensions

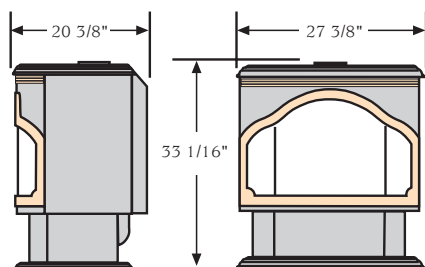


Fireplace Insert Dimensions

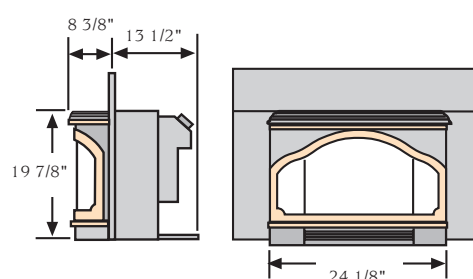

Freestanding Stove Clearances To Unprotected Combustible Walls

Stove clearances measured from stove top.

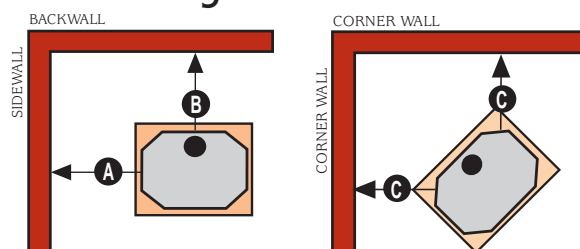

Straight Installation

- A = Stove Top to Sidewall 10"
- B = Stove Top to Backwall 4"

Corner Installation

- C = Stove Top to Corner Wall 4"

Freestanding Floor Protection

When the stove is installed directly on carpeting, vinyl or a combustible floor other than wood or high pressure laminate wood flooring, the stove must be installed on a metal or wood protection panel, extending the full width and depth of the stove.

Fireplace Insert Clearances To Unprotected Combustible


Insert clearances measured from insert top & side.

Please refer to fireplace insert clearance drawing.

- A = Top to Combustible Mantle 17 1/2"
- B = Top to Top Facing 8"
- C = Side of Insert to Side Facing 8"
- D = Side of Insert to Sidewall 10"
- E = Hearth Extension - Front of Insert 0"
- F = Hearth Extension - Side of Insert 0"

Heritage DVL FS SAFETY TESTED By OMNI-Test Laboratories, Inc. to ANSI Z21.88/CSA 2.53-1998, applicable sections of UL 507b and CAN/CGA 2.17-M91. Units must be installed in accordance with all local codes, if any; if not, follow in USA - ANSI Z223.1 1992 and NFPA 54(88), in Canada - CAN/CGA B-149 and other requirements listed in the Owner's Manual.

Heritage Bay B-Vent Insert SAFETY TESTED By OMNI-Test Laboratories, Inc. to ANSI Z21.11.1-1991, ANSI Z21.11.1a-1993, CAN/CGA 2.1M88 and CAN/CGA 2.1M91. Units must be installed in accordance with all local codes, if any; if not, follow in USA - ANSI Z223.1 1992, in Canada - CAN/CGA B-149 and other requirements listed in the Owner's Manual.

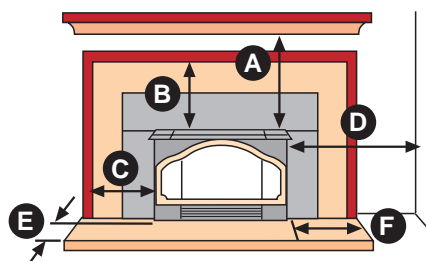

Panel Sizes Rectangular & Arched

Rectangular 8" Panels
27 3/4" H x 40 1/2" W

Rectangular 10" Panels

29 3/4" H x 44 1/2" W

Rectangular 12" Panels

31 3/4" H x 48 1/2" W

Arched 8" x 10" Panels

40 3/8" W x 28 7/8" Height at top of arch

23 1/2" Height at side of arch

NOTE: All panel kits includes trim.

NOTE: Improper installation of your gas appliance or failure to operate it according to the guidelines detailed in the Owner's Manual, may negate your warranty and endanger your home and family. Contact local building or fire officials about restrictions and installation requirements in your area. Insert must be installed only in a masonry or factory built (steel) fireplace.



Your LOPI® Authorized Dealer Is Located At:

Manufactured By T. I., Kirkland, WA

Visit our WEB site at: <http://hearth.com/travis>

©Copyright 1999 Printed In U.S.A. Lopi reserves the right to alter or improve its products at any time without notification.