

# FUEL MANAGEMENT SYSTEMS



**Franklin Fueling Systems**



**PRODUCT CATALOG**



## Fuel Management Systems

Franklin Fueling Systems manufactures and markets a complete line of fuel management systems globally under the INCON product brand. Automatic tank gauges, electronic line leak detection, magnetostrictive probes and remote monitoring software are just some of the products available. All are designed and manufactured using state-of-the-art technology to meet all of our customers' fuel management and leak detection compliance needs.

<b>Fuel Management System Consoles</b>	<b>3</b>	TSP-HIS Hydrostatic Interstitial Brite™ Sensor	33
TS-5 Fuel Management System	3	TSP-DIS Discriminating Interstitial Brite™ Sensor	34
TS-550 and TS-5000 Fuel Management Systems	5	TSP-EIS Electro-Optic Interstitial Sensor	35
Fuel Management System Console Accessories	7	TSP-ULS Liquid Sensor	36
<b>Environmental &amp; Tank Monitoring</b>	<b>9</b>	TSP-UHS Universal Hydrostatic Sensor	36
Colibri Tank Monitor	9	TSP-DMS Discriminating Magnetostrictive Sensor	37
TS-EMS Environmental Monitoring System	11	TSP-DDS Discriminating Dispenser Sump Brite™ Sensor	38
In-Station Diagnostics	13	TSP-DTS Discriminating Turbine Sump Brite™ Sensor	38
<b>Tank Sentinel® Consoles</b>	<b>14</b>	TSP-DVS Discriminating Vapor Brite™ Sensor	39
TS-1001 Full Feature Compliance Console	14	TSP-MWS Monitoring Well Brite™ Sensor	39
TS-1001/G Fixed Feature Generator Tank Monitoring Console	16	TSP-HLS Level Sensor	40
TS-504 and TS-508 Fixed Feature Inventory Control Consoles	17	Sensor Installation Kits	41
TS-750 Fixed Feature Tank Monitoring and Compliance Kits	19	Sensor Installation Accessories	43
<b>Tank Sentinel® Console Accessories</b>	<b>21</b>		
<b>S940 Sensor Alarm Console</b>	<b>22</b>		
<b>Electronic Line Leak Detectors</b>	<b>23</b>		
TS-L300 AutoLearn™	23		
Line Sentinel™	25		
<b>Probes and Sensors</b>	<b>27</b>		
Leak Detection and Inventory Control Probes	27		
Moorman Level Gauge Kit	29		
Float Kits	30		
Density Measurement Float Kit	31		
Probe Installation Kits	32		

Continued on next page...

# Table of Contents

<b>External Console Hardware</b>	<b>44</b>	<b>Accessories</b>	<b>60</b>
TS-RA1 Remote Audible and Visible Alarm Unit	44	Sump Test System Kit	60
TS-RA2 Remote Audible and Visible Alarm Unit	45	<b>Spare Parts</b>	<b>62</b>
TS-RK Remote Alarm Acknowledge Unit	46	TS-5, TS-550, TS-5000 and TS-EMS Consoles	62
TS-DIM Dispenser Interface Module	47	TS-504 and TS-750 Consoles	62
TS-TPI Turbine Pump Interface	49	TS-508 Console	62
TS-ROM2 BriteBox™ Relay Output Module	50	TS-1001 Console	63
TS-SEM BriteBox™ Sensor Expansion Module	51	TS-2001 Console	63
TS-M Modem	52	TS-LLD	63
TS-EPS Ethernet Port Server	53	TS-LS300	64
External Console Hardware Accessories	53	TS-LS500	64
<b>Software</b>	<b>54</b>	TS-STC Sump Test Kit	64
System Sentinel™ Remote Fuel Management Software	54	Accessories	64
System Sentinel AnyWare™ Internet Enabled Fuel Management Software	56		
Get Connected AnyWare™ Remote Polling Service	57		



### Advantages

- Monitors up to 12 tanks.
- Continuous inventory monitoring and tank testing through proven magnetostrictive probe technology.
- Highest rated continuous 24 hour leak detection (SCALD) in the industry.
- Density measurement and alarm capabilities.
- Low cost, compact console.
- Standard communication ports including Ethernet, two RS-232 and USB.
- Internal fax and data modem options.
- Generates inventory, compliance and fuel management reports.

## TS-5 Fuel Management System

The TS-5 fuel management system provides inventory and leak detection for up to 12 storage tanks.



### Specifications

- Number of tanks monitored: 12.
- Input channels: 2.
- Output only channels: 2.
- Display type: touch screen LCD.
- Applicable liquids: petroleum, chemicals and hazardous waste.
- Level units: inches, centimeters and millimeters.
- Volume units: gallons or liters.
- Display size: 320 × 240 pixels.
- Power requirements: 110 to 220 VAC, +15%, -10%, 150 Watt maximum, 1.5 Amps.
- Operating temperature: 32° to 104 °F (0° to 40 °C).
- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Intrinsic safety rating:  
US - Class I, Div. I, Group D.  
Europe - Group IIA, Zone 0.
- LCD backlight contains mercury, dispose of properly.
- Third party approved volumetric leak detection (Pd = 99.9% at 0.2 gph).
- Can provide dispenser information and automate reconciliation when used in conjunction with the dispenser interface module.
- Provides accurate inventory information, including reports that can be used to better schedule deliveries.
- Multipurpose relays can be used for outputs to overfill alarms and external audible and visual indicators.

### Capabilities

- The fuel management system is built on an established open-system software platform.
- Standard Ethernet connection allows easy integration to existing wide area networks.
  - XML-based software allows remote access to data without additional software.
  - Graphical touch screen LCD allows text to be displayed in native language.
  - E-mail notification gives station owners real-time status information.
  - Monitor back-up generators for fuel inventory control, run status reports, and continuous leak detection.

### Applications

The fuel management system has been designed to monitor tank tightness and gather inventory information.

Model	Description
T5	TS-5 console without display
T5D	TS-5 console with LCD display

Note: Includes one TS-PRB 12 input probe module.

## TS-5 Console Hardware and Software Options

The TS-5 console comes standard with the ability to perform in-tank static leak detection. The following software and hardware options can be added to customize your consoles. The internal hardware options will be factory installed when ordered with the console.

### Internal Hardware Options

Part Number	Description
TS-DIMIB5	(I) Internal dispenser interface module, dispenser interface cable must be ordered separately
TS-LON5	(E) EcheLON communication module, IFSF protocol capability
TS-MDMIB	(M) Internal modem, includes fax and data software capability

Note: Only one TS-DIMIB or TS-LON module can be installed per console.

### Internal Software Options

Part Number	Description
TS-TT	(T) Statistical Continuous Automatic Leak Detection, 24 hour continuous tank testing software
TS-TRAC	(R) Tank inventory reconciliation and auto calibration

## TS-5 Fuel Management System Console Ordering Guide

Console model, software and hardware options can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

**T5 DM X / TR**

**T5 = Model**

T5 = TS-5, 110 or 200 VAC.

**DM X = Hardware Options**

D = Display, standard in the TS-5.

M = Internal modem.

X = I for dispenser interface module or E for a LON module.

**TR = Software Options**

T = SCALD 24-hour tank testing.

R = Reconciliation.

## Advantages

- Monitors up to 72 tanks.
- Continuous inventory monitoring and tank testing through proven magnetostrictive probe technology.
- Highest rated continuous 24 hour leak detection (SCALD) in the industry.
- Density measurement and alarm capabilities.
- Patented AutoLearn™ electronic line leak detection capability.
- Standard communication ports including one Ethernet and USB, two RS-232.
- Internal fax and data modem options.
- Interstitial and piping sump leak sensing for up to 72 sensors.
- Can handle 72 dispenser hook inputs, eliminating need for an external box.
- Approved by the California Air Resources Board EO VR-202.

## TS-550 and TS-5000 Fuel Management Systems

The TS-550 and TS-5000 fuel management systems' modular design provides compliance and fuel management capability in a single enclosure.



## Specifications

- Number of tanks monitored: 72.
- Input channels: 2.
- Output only channels: 2.
- Display type: touch screen LCD.
- Applicable liquids: petroleum, chemicals and hazardous waste.
- Level units: inches, centimeters and millimeters.
- Volume units: gallons or liters.
- Display size: 320 × 240 pixels.
- Power requirements: 110 to 220 VAC, +15%, -10%, 150 Watt maximum, 1.5 Amps.
- Operating temperature: 32° to 104 °F (0° to 40 °C).
- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Intrinsic safety rating:  
US - Class I, Div. I, Group D.  
Europe - Group IIA, Zone 0.
- LCD backlight contains mercury, dispose of properly.

## Applications

The flexible architecture of the TS-550 and TS-5000 allows multiple applications to run concurrently, satisfying current business and regulatory requirements.

- Fuel management system applications provide accurate inventory information, third party-approved tank and line leak detection, automated inventory

reconciliation and submersible pump monitoring.

- The vapor recovery monitoring application gauges the effectiveness of a station's vapor recovery equipment through continuous monitoring of gasoline vapors during fueling operations.
- Secondary containment monitoring application continuously monitors the interstitial spaces of double wall tanks, lines and sumps, and notifies station owners when a release of product into the environment has occurred.

## Capabilities

The TS-550 and TS-5000 are built on an established open-system software platform.

- Standard Ethernet connection allows easy integration to existing wide area networks.
- XML-based software allows remote access to data without software.
- Graphical touch screen LCD allows text to be displayed in native language.
- Generic interface modules give flexibility in configuring station monitoring requirements.
- E-mail notification gives station owners real-time status information.
- Multiple printing options give flexibility in style and format of reports.
- Monitor back-up generators for fuel inventory control, run status reports, and continuous leak detection.



## TS-550 110 and 220 VAC Models

Model	Description
T550	TS-550 base console without display and printer
T550D	TS-550 base console with display and without printer
T550DP	TS-550 base console with display and printer

## TS-5000 110 and 220 VAC Models

Model	Description
T5000	TS-5000 base console without display and printer
T5000D	TS-5000 base console with display and without printer
T5000DP	TS-5000 base console with display and printer

## Expansion Console

Model	Description
TS-EXPC	Secondary console to add eleven additional plug-in modules to the primary TS-550/5000 console, comes without a display or printer

## TS-550 and TS-5000 Console Hardware and Software Options

TS-550 and TS-5000 consoles come standard with the ability to perform in-tank static leak detection. The following software and hardware options can be added to customize your console. The internal hardware options will be factory installed when ordered with the console.

### Internal Hardware Options

Part Number	Description
TS-DIMB	(I) Internal dispenser interface module, dispenser interface cable must be ordered separately
TS-LON	(E) EcheLON communication module, IFSF protocol capability
TS-MDMIB	(M) Internal modem, includes fax and data software capability

Note: Only one TS-DIM or TS-LON module can be installed per console.

### Internal Software Options

Part Number	Description
TS-TT	(T) Statistical Continuous Automatic Leak Detection, 24 hour continuous tank testing software
TS-TRAC	(R) Tank inventory reconciliation and auto calibration
TS-ELLD	(L) Electronic line leak detection
TS-VRM	(V) Vapor recovery monitoring, ISD
TS-SCM	(S) Secondary containment monitoring

## TS-550 and TS-5000 Fuel Management System Console Ordering Guide

Console model, software and hardware options can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

**TX DPM Y / TRLVS**

**TX = Model**

T550 = TS-550, 110 or 220 VAC.

T5000 = TS-5000, 110 or 220 VAC.

**DPM Y = Hardware Options**

D = Display.

P = Printer.

M = Internal modem.

Y = I for dispenser interface module or E for a LON module.

**TRLVS = Software Options**

T = SCALD 24-hour tank testing.

R = Reconciliation.

L = Line leak detection.

V = Vapor recovery monitoring.

S = Secondary containment monitoring.



## Fuel Management System Console Accessories

### TS-550 and TS-5000 Fuel Management System Console Interface Modules

TS-550 and TS-5000 consoles come standard with a power supply module and a controller module. Additional interface modules can be installed. Interface modules ordered with a console will be installed at the factory. The following guidelines must be followed:

- TS-550: Six total modules can be installed with a maximum of four intrinsically safe modules and a maximum of three of any one kind of module.
- TS-5000: Eleven total modules can be installed with a maximum of nine intrinsically safe modules and a maximum of three of any one kind of module.

#### Intrinsically Safe Modules

Part Number	Description
TS-PRB	12 input probe module, LL2 Series mag probes, VFM flow meters and DMS Mag sensors
TS-2WSNS	12 input 2-wire sensor module, TSP-ULS and TSP-HLS sensors
TS-3WSNS	8 input 3-wire sensor module, TSP-EIS, TSP-DIS, TSP-DDS, TSP-DTS, TSP-HIS, TSP-MWS and TSP-DVS sensors
TS-4201B	8 input 4-20 mA module, LSU500 transducers and VPS and SCCM pressure sensors

#### Non-Intrinsically Safe Modules

Part Number	Description
TS-ACI	12 input AC input module, dispenser hook inputs
TS-RLY	8 output relay module, SCCM solenoid and STP control
TS-10ARLY	6 output 10 Amp relay output module, dispenser power
TS-IO	Input output module, 4 output 4-20 mA, 8 input 3-240 VAC/DC
TS-420EXP	8 input 4-20 mA module, LSU500E transducers and external devices

Note: TS-RLY Module is not required for STP control when utilizing turbine pump interface (TPI) communications.  
The TS-420EXP module requires Controller Module software version 9.5 or greater

### TS-LS500 AutoLearn™

Pressurized line leak detection provides automatic 3.0 gph hourly, 0.2 gph monthly and 0.1 gph annual precision line leak detection for TS-550 and TS-5000 consoles. Available in intrinsically safe and explosion proof models. Use explosion proof when low voltage conduit is not available. The TS-4201B or TS-420EXP, TS-ACI and TS-RLY module and TS-ELLD software option must be ordered and installed in the fuel management system console.

#### Intrinsically Safe

For new installations where separate low voltage conduits can be used. Use TS-4201B module.

Model	Description
TS-LS500/2	2-line transducer kit
TS-LS500/3	3-line transducer kit
TS-LS500/4	4-line transducer kit

Note: Using turbine pump interface (TPI) communications eliminates the need for a TS-RLY module;  
FFS intelligent controllers required.

#### Explosion Proof

For retrofit installations where only a high voltage conduit can be used. Use TS-420EXP module.

Model	Description
TS-LS500E/2	2-line transducer kit, explosion proof
TS-LS500E/3	3-line transducer kit, explosion proof
TS-LS500E/4	4-line transducer kit, explosion proof

Note: Using turbine pump interface (TPI) communications eliminates the need for a TS-RLY module;  
FFS intelligent controllers required.

#### Alternative Fuels Accessories

Model	Description
TS-AFALNIP	Leak generator needle valve kit required for E85 installations

### Dispenser Interface Module Cables

Part Number	Description
TSP-WDCBL	Wayne cable
TSP-TDCBL	Tokheim cable
TSP-GDCBL	Gilbarco cable
TSP-GSDCBL	Gilbarco G-Site cable
TSP-BDBCBL	Bennett 515 only cable

## Paper Supplies

Part Number	Description
TS-TP5000	TS-550 and TS-5000 impact printer paper
TS-TP5000C	12 rolls of impact printer paper
TS-INKRB	TS-550 and TS-5000 ink ribbon

## Secondary Containment Monitoring

The secondary containment monitoring system is designed to detect leaks in double-wall tanks, sumps and piping. TS-420IB, TS-RLY and TS-ACI modules and the TS-SCM software option must be ordered and installed in the tank gauge console.

### Sensor Modules

Part Number	Description
TS-SCCM/1	Single channel secondary containment control module
TS-SCCM/2	Dual channel secondary containment control module
TS-SCMCAL	Leak generator kit, one per station
VS-SCCM/1	220 VAC single channel secondary containment control module
VS-SCCM/2	220 VAC dual channel secondary containment control module

### Install Kit

Part Number	Description
TSP-SCLSI	Product, vapor line and sump containment install kit
TSP-SCTK2	Tank containment install kit for 2" risers, in-tank hose sold separately
TSP-SCTK2B	Tank containment install kit for 2" risers with BSP threads, in-tank hose sold separately
TSP-SCTK4	Tank containment install kit for 4" risers, in-tank hose sold separately
TSP-SCTK4B	Tank containment install kit for 4" risers with BSP threads, in-tank hose sold separately

### Accessories

Part Number	Description
TSP-SCBRB	Five 1/4" NPT barbed fittings
TSP-SCBRBT	1/4" NPT barbed T-fitting
TSP-SCCLP	Five hose clamps
TSP-SCTB25	25' hose
TSP-SCTB50	50' hose
TSP-SCTB100	100' hose
TSP-SCVLV	Five Schreader valves

## Upgrading Installed Fuel Management System Consoles

Two types of upgrades can be done on a fuel management system console: feature upgrades and software upgrades. The latest software versions are included with all feature upgrades. Most feature upgrades require ordering a software option, hardware options and interface modules. Some modules may already be installed.

### Feature Upgrade

Upgrade	Software	Hardware	Interface Module
Internal modem		TS-MDMIB internal modem	
24 hour tank testing	TS-TT SCALD tank testing		
Line leak	TS-ELLD electronic line leak detection	Appropriate TS-LS500/N transducer kit	TS-RLY module, not needed with TPI TS-420IB module TS-ACI module
Tank inventory reconciliation	TS-TRAC tank inventory reconciliation and auto calibration	TS-DIMIB module Appropriate DIM interface cables	
Secondary containment monitoring	TS-SCM secondary containment monitoring	Appropriate TS-SCCM modules, installation kits and accessories	TS-ACI module TS-RLY module TS-420IB module
Vapor recovery monitoring (ISD)	TS-VRM vapor recovery monitoring	TS-VFM flow meters TS-VPS pressure sensor TS-DIMIB dispenser interface	TS-ACI module (not needed w/VRM 1.2) TS-RLY or TS-10ARLY module TS-PRB probe module TS-420IB module

Note: When placing an order for a feature upgrade, the serial number of the console to be upgraded must be supplied.

### Software Version Upgrade Only

Part Number	Description
TSA-UPGMS	Software version upgrade shipped on a USB memory stick

### Advantages

- Monitors fuel levels and density measurements in up to six tanks.
- Static and continuous tank leak detection capabilities.
- Standard communication ports.
- External USB printer support.
- Web interface for remote access.
- Programmable email notification of alarms and events.
- Compact size provides installation location flexibility.
- Autocalibration can recreate missing or inaccurate tank strapping charts.

## Colibri Tank Monitor

Colibri is the ideal solution for the fueling station owner who requires basic, straightforward functionality in a fuel inventory monitoring system. The Colibri system monitors fuel density and inventory levels in up to six tanks and provides accurate, reliable information without manually taking tank readings. Additional features communicate the status of tank contents, including volume, temperature, mass, water level and continuous tank leak detection. The Web interface feature allows authorized users access to tank information from any computer connected to the internet or wide area network, as well as custom alerts which can be sent to email or mobile devices. The Colibri tank monitor is the highest quality, best value solution available for any fueling station that requires essential tank monitoring capabilities.



### Specifications

- Number of tanks monitored: 6
- Output channels: 2
- Display type: color LCD touch screen
- Internal audible alarm
- Alarm, warning and power LEDs
- Applicable liquids: petroleum, chemicals and hazardous waste
- Level units: centimeters, millimeters and inches
- Volume units: liters or gallons (mass with density option)
- Display size: 142 mm (5.6 in)
- Dimensions: 185 mm x 303 mm x 57 mm (7.27 in x 11.92 in x 2.24 in)
- Power requirements: 94 to 264 VAC, 50/60 Hz 1.0 Amps
- Operating temperature: 0 to 40 °C (32 to 104 °F)
- Humidity: 0% to 95% non-condensing
- Intrinsically safe rating: US – Class I, Div. I, Group D Europe – Group IIA, Zone 0
- Compatible with FFS inventory and leak detection LL2 probes

### Standard Capabilities


- Inventory and delivery management
- Static tank leak detection
- High, low and water alarm set points
- Available with or without display
- Web interface and email notifications

### Optional Capabilities

- SCALD 24 hour tank leak detection
- Inventory reconciliation / Tank autocalibration
- Density and mass measurement

### Approvals

- UL, cUL, ATEX, IECEx
- Third party certification of leak detection capabilities

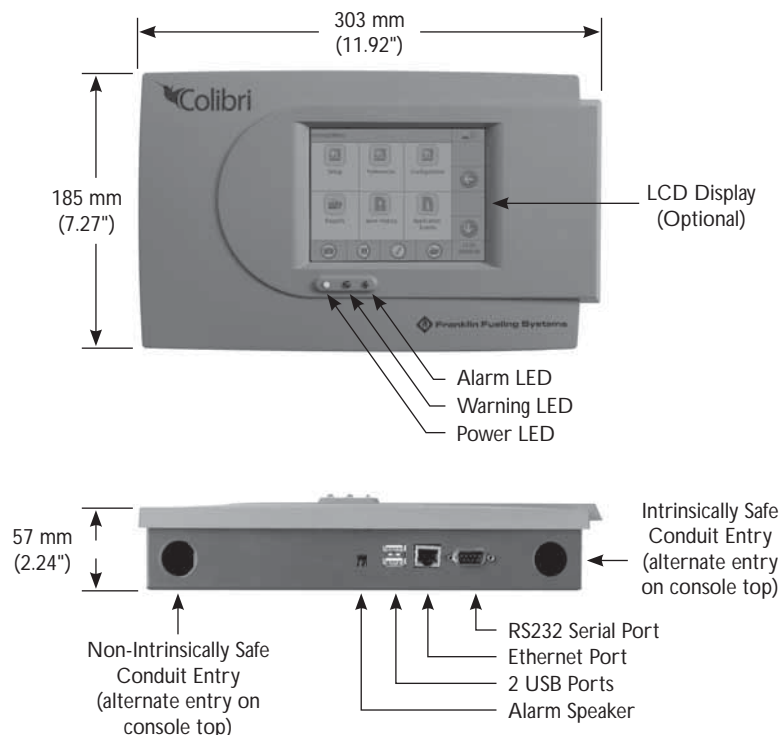

## Ordering Guide

Console model and software can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

### CL6 D / TR

CL6 = Colibri Model

D = Display Option

TR = Software Options

T = SCALD 24 hour tank testing

R = Reconciliation/autocalibration

## Colibri Consoles

Model	Description
CL6	Six channel Colibri console without display
CL6D	Six channel Colibri console with display

## Internal Software Options

Model	Description
TS-TT	(T) Statistical Continuous Automatic Leak Detection (SCALD), 24 hour continuous tank testing software
TS-TRAC	(R) Tank inventory reconciliation and autocalibration software

## Leak Detection and Inventory Control Probes

Colibri is compatible with all TSP-LL2-xxx leak detection and TSP-LL2-xxx-I inventory probes, which should be ordered separately along with the appropriate float kit. Inventory probes do not require a special installation kit and may be installed on the bottom of a tank using a cap with the appropriate cable gland. Leak detection probes and tanks utilizing optional density floats must be installed using the appropriate Franklin Fueling Systems installation kit.



## Advantages

- Standalone ISD system.
- Approved by the California Air Resources Board EO VR-202.
- Includes TS-VRM vapor recovery monitoring software and optional secondary containment monitoring.
- Dispenser-based disabling prevents the entire site from shutting down in the event of an EVR failure.
- Wired-less Flow Meter and Pressure Sensor interface option.
- Ethernet-ready, web-based remote access provides the user with remote access to VRM status information, reports and alarm information using any web browser.
- Create custom rules to send e-mails and text messages on alarms and events directly from the console to service and compliance personnel.
- User-friendly touch screen interface with icon-based navigation.
- Scalable open architecture for easy and cost-saving future upgrades.

## TS-EMS Environmental Monitoring System

The TS-EMS environmental monitoring system can perform in-station diagnostic vapor recovery monitoring (VRM) and secondary containment monitoring (SCM) and interface to an existing tank gauge.



## Specifications

- Number of dispensers monitored: 16.
- Input channels: 2.
- Output only channels: 2.
- Display type: touch screen LCD.
- Volume units: gallons or liters.
- Display size: 320 × 240 pixels.
- Power requirements: 110 to 220 VAC, +15%, -10%, 150 Watt maximum, 1½ Amps.
- Operating temperature: 32° to 104 °F (0° to 40 °C).
- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Intrinsic safety rating:  
US - Class I, Div. I, Group D.  
Europe - Group IIA, Zone 0.
- LCD backlight contains mercury, dispose of properly.

## Applications

The flexible architecture of the TS-EMS allows multiple applications to run concurrently, satisfying multiple monitoring needs.

- The vapor recovery monitoring application gauges the effectiveness of a station's vapor recovery equipment

through continuous monitoring of gasoline vapors during fueling operations.

- Secondary containment monitoring application continuously monitors the interstitial spaces of double wall tanks, lines and sumps, and notifies station owners when a release of product into the environment has occurred.

## Capabilities

The TS-EMS is built on an established open-system software platform.

- Standard Ethernet connection allows easy integration to existing wide area networks.
- XML-based software allows remote access to data without additional software.
- Graphical touch screen LCD allows text to be displayed in native language.
- Generic interface modules give flexibility in configuring station monitoring requirements.
- E-mail notification gives station owners real-time status information.
- Multiple printing options give flexibility in style and format of reports.

Model	Description
TEMSDPI/V	TS-EMS console with display, printer, DIM,VRM software and one TS-PRB,TS-420IB and TS-10ARLY
TEMS2DPI/V	TS-EMS console with display, printer, DIM,VRM software, one TS-PRB and TS-420IB, and two TS10ARLY
TEMS3DPI/V	TS-DTU ready TS-EMS console with display, printer, DIM,VRM software, and one TS-10ARLY module
TEMSDPI/VS	TS-EMS console with display, printer, DIM, VRM and SCM software, and one TS-PRB, TS-420IB and TS-10ARLY
TEMS2DPI/VS	TS-EMS console with display, printer, DIM and SCM software, one TS-PRB and TS-420IB, and two TS-10ARLY

- Notes: 1. Appropriate DIM cable must be ordered separately.  
 2. TEMS and TEMS3 systems can support up to six dispensers. TEMS2 systems can support up to twelve dispensers. All models can be expanded to support up to 16 dispensers with additional modules.  
 3. The appropriate number of TS-VFM vapor flow meters and one TS-VPS vapor pressure sensor must be ordered separately to perform vapor recovery monitoring.  
 4. TS-ACI modules and hook signal wiring is no longer required for TS-EMS installs.

## TS-EMS Console Hardware and Software Options

TS-EMS consoles come standard with the ability to perform vapor recovery monitoring. The following software and hardware options can be added to customize your console. The internal hardware options will be factory installed when ordered with the console.

### Internal Hardware Options

Part Number	Description
TS-MDMIB	(M) Internal modem, includes fax and data software capability

### Internal Software Options

Part Number	Description
TS-SCM	(S) Secondary containment monitoring

## TS-EMS Fuel Management System Console Interface Modules

TS-EMS consoles come standard with a power supply module, a controller module and a model dependent set of interface modules that can support up to 6 or 12 dispensers. In some situations non-standard module configurations may be required. Additional modules will be shipped separately from the EMS console. Six total modules can be installed with a maximum of four intrinsically safe modules and a maximum of three of any one kind of module.

### Intrinsically Safe Modules

Part Number	Description
TS-PRB	12 input probe module,VFM flow meters
TS-420IB	8 input 4-20 mA module,VPS and SCCM pressure sensors

### Non-Intrinsically Safe Modules

Part Number	Description
TS-RLY	8 output relay module, low power dispensers and SCCM solenoids
TS-10ARLY	6 output 10 Amp relay output module, high power dispensers and SCCM solenoids

### External Modules

Part Number	Description
TS-DTU/P	Data transfer unit for wired-less VFM and VPS communications

Note: Order one TS-DTU/P and one TS-DRK/x install kit per dispenser. Order one additional TS-DTU/P for the console.

## Dispenser Interface Module Cables

Part Number	Description
TSP-WDCBL	Wayne cable
TSP-TDCBL	Tokheim cable
TSP-GDCBL	Gilbarco cable
TSP-GSDCBL	Gilbarco G-Site cable
TSP-BDCBL	Bennett 512 cable

## TS-EMS Enivornmental Monitoring System Ordering Guide

The TS-EMS environmental monitoring system comes standard with display, printer and dispenser interface module. An internal TS-MDMIB modem can be added as a hardware option. Order the TEMSDPI/VS if the secondary containment monitoring software option is required.

## Advantages

- Dispenser-based disabling prevents the entire site from shutting down in the event of an EVR failure.
- Wireless Flow Meter and Pressure Sensor interface option when conduit is not present.
- Ethernet-ready, web-based remote access provides the user with remote access to VRM status information, reports and alarm information using any web browser.
- Create custom rules to send e-mails and text messages on alarms and events directly from the console to service and compliance personnel.
- User-friendly touch screen interface with icon-based navigation.
- Scalable open architecture for easy and cost-saving future upgrades.

## TS-DTU

- Uses dispenser power wires to transmit data.
- Multi-industry proven power line communications technology.
- Save weeks of installation time.
- Save thousands of dollars in costly conduit installation and avoid damaged and blocked conduit.
- Save on the cost of the console due to a reduction in modules needed.
- No disruption of forecourt by having to break concrete.
- No need to pull wires.
- Will not interfere with dispenser operation.
- UL approved for installation in most common dispenser models.
- Works even if some dispensers are on different phases.

## In-Station Diagnostics (ISD)

The INCON vapor recovery monitoring (VRM) option meets or exceeds all ISD requirements for ensuring that all components of the vapor recovery system are functioning normally. Recorded sales transactions are compared to data obtained from a TS-VFM vapor flow meter installed in each dispenser to verify that equivalent vapors are recovered from the vehicle when fuel is dispensed. The pressure of the vapor containment space is constantly monitored by the TS-VPS vapor pressure sensor and tested for over pressure and leakage conditions. Local and remote notification options alert the user of abnormalities and dispenser-based disabling keeps the rest of the site up and running when a single dispenser EVR system has a problem. The Wireless option, featuring the TS-DTU, prevents the need to break concrete to install new conduit or even pull wires and reduces the cost of the console.



TS-5000



TS-550



TS-EMS



Vapor Flow Meter



Vapor Pressure Sensor



Data Transfer Unit

Model	Description
TS-VFM	Vapor flow meter, one per dispenser
TS-VPS	Vapor pressure sensor, one per site
TS-VRM	Vapor recovery monitoring software
TS-DTU/P	Data transfer unit for wireless VFM and VPS communications
TS-DRK/A	Gilbarco Advantage dispenser retrofit install kit
TS-DRK/E	Gilbarco Encore dispenser retrofit install kit
TS-DRK/T	Tokheim dispenser retrofit install kit
TS-DRK/W	Wayne dispenser retrofit install kit

Notes: 1. Approved by California Air Resources Board EO VR-202.

2. Minimum module requirements include one TS-PRB, TS-420IB, TS-RLY or TS-10ARLY.

3. TS-VRM software is included in the TS-EMS console.

4. Order one TS-DTU/P and one TS-DRK/x install kit per dispenser. Order one additional TS-DTU/P for the console. Controller Module software 9.5 or greater required.

5. Consoles using the wireless option do not require the TS-PRB or TS-420IB modules for communication with the TS-VFM and TS-VPS

6. TS-ACI modules and hook signal wiring is no longer required for ISD applications.



## TS-1001 Full Feature Compliance Consoles

The TS-1001 consoles feature business management and environmental compliance capabilities. They offer inventory, leak detection, reporting and alarm notification.



### Applications

The automatic tank gauge has been designed to monitor tank tightness, gather inventory information and assist with multiple environmental compliance issues.

- Third party approved volumetric leak detection (Pd = 99.9% at 0.2 gph).
- Can provide dispenser information and automate reconciliation when used in conjunction with the dispenser interface module.
- Provides accurate inventory information including reports that can be used to better schedule deliveries.
- Multipurpose relays can be used for outputs to overfill alarms and external audible and visual indicators.

### Capabilities

The TS-1001 has programmable settings and is capable of monitoring up to four tanks.

- Offers a wide range of advanced communication options.
- Expanded, backlit LCD display with two lines of 40 columns.
- Supports multiple languages.
- Supports English and metric units.
- Generates numerous system warnings and tank alarms to quickly notify the user of any potential problems.
- Supports important generator and fuel management features.

\*Maximum number when including additional options.

### Specifications

- Number of tanks monitored: 4.
- Input channels: 2 (10\*).
- Output only channels: 2 (10\*).
- Sensor inputs: 12 (28\*).
- Dimensions: 11" x 12" x 4".
- Display type: alphanumeric LCD.
- Applicable liquids: petroleum, chemicals and hazardous waste.
- Level units: inches or millimeters.
- Volume units: gallons or liters.
- Temperature units: degrees Fahrenheit or Celsius.
- Display size: 2 lines of 40 characters.
- Power requirements:  
115 VAC - +15%, -10%, 100 Watts maximum, 1 Amp maximum.  
230 VAC - +15%, -10%, 100 Watts maximum, 0.5 Amp maximum.
- Operating temperature: 32° to 122 °F (0° to 50 °C).
- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Intrinsic safety rating:  
US - Class I, Div. I, Group D.
- Number of LLDs supported: 4.
- Printer type: 24 column thermal.

### Advantages

- Monitors up to 4 tanks.
- Designed on an open architecture platform that is easily expandable for additional capabilities.
- Low cost, compact console handles a wide range of applications and is easily programmed through multipurpose function keys to meet site-specific criteria.
- Internal high-speed fax/data modem capability allows remote access from System Sentinel™ and System Sentinel AnyWare™.
- Executes automatic system check and notifies user if the unit is not functioning properly and performs continuous leak testing, no station down time required.



## TS-1001 Console Ordering Guide

Console model, software and hardware options can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

**XX PM / A B C CLR**

**XX = Model**

T1 = TS-1001, 120 VAC.

V1 = TS-1001, 220 VAC.

**PM = Hardware Options**

P = Printer, standard.

M = Internal modem.

**A B C CLR = Software Options**

A = 0, 2, 4 tanks,

TS-1001 - 0, 2, 4.

B' = S, SCALD, or G, generator.

C'' = D - data, F - fax/data software.

C = Continental version.

L = Line leak detection.

R = Reconciliation.

\*SCALD and generator options are mutually exclusive. The SCALD option is not needed for the generator model.


\*\*Data and fax/data modem options are mutually exclusive.

## TS-1001, 110 VAC Models

Model	Description
T1P/0	Leak monitor with 12 sensor inputs and printer
T1P/2	ATG, up to 2 tanks with 12 sensor inputs and printer
T1P/4	ATG, up to 4 tanks with 12 sensor inputs and printer

## TS-1001, 220 VAC Models

Model	Description
V1P/0C	Leak monitor with 12 sensor inputs and printer
V1P/2C	ATG, up to 2 tanks with 12 sensor inputs and printer
V1P/4C	ATG, up to 4 tanks with 12 sensor inputs and printer

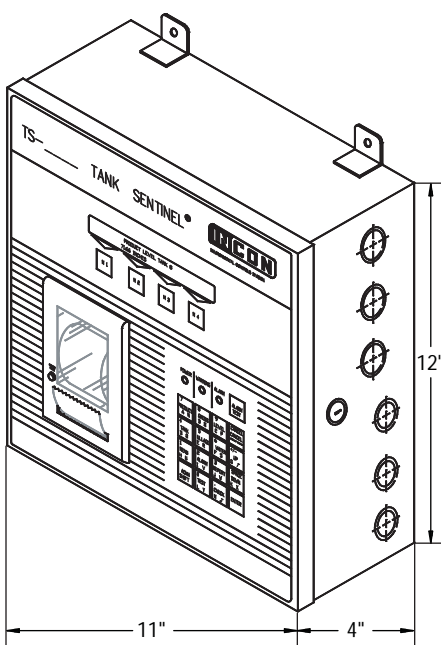

TS-1001

## TS-1001/G Fixed Feature Generator Tank Monitoring Console

The TS-1001/G back-up generator tank monitoring system provides fuel inventory control, runs status reports and continuous leak detection.



### Specifications

- Number of tanks monitored: 2.
- Input channels: 2 (10').
- Output only channels: 2 (10').
- Sensor inputs: 12 (28').
- Dimensions: 12" x 11" x 4".
- Display type: alphanumeric LCD.
- Applicable liquids: petroleum, chemicals and hazardous waste.
- Level units: inches or millimeters.
- Volume units: gallons or liters.
- Temperature units: degrees Fahrenheit or Celsius.
- Display size: 2 lines of 40 characters.
- Power requirements:  
115 VAC - +15%, -10%, 100 Watts maximum, 1 Amp maximum.  
230 VAC - +15%, -10%, 100 Watts maximum, 0.5 Amp maximum.
- Operating temperature: 32° to 122 °F (0° to 50 °C).

- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Intrinsic safety rating:  
US - Class I, Div. I, Group D.
- Number of LLDs supported: 8.
- Printer type: 24 column thermal.

### Capabilities

- Generates inventory, compliance and fuel management reports.
  - Performs continuous leak detection.
  - Supports English and metric units.
  - Generates numerous system warnings and tank alarms to quickly notify the user of any potential problems.
  - Can open and shut appropriate valves through multipurpose relays.
- \*Maximum number when including additional options.

### Advantages

- Monitors up to 2 tanks.
- Proven INCON design.
- Easy site-specific programming through keyboard.
- Accurate inventory information, including days supply remaining.
- Alarms and positive shut-off available.
- As many as 28 sensor inputs.
- Communicates directly to System Sentinel™ software.
- Uses highly accurate magnetostrictive probe technology.

### TS-1001/G Console Ordering Guide

Console model, software and hardware options can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

**XX PM / 2G B C**

**XX = Model**

T1 = TS-1001, 120 VAC.

V1 = TS-1001, 220 VAC.

**PM = Hardware Options**

P = Printer, standard.

M = Internal modem.

**2G B C = Software Options**

B\* = D - data, F - fax/data software.

C = Continental version.

\*Data and fax/data modem options are mutually exclusive.

### TS-1001/G, 110 and 220 VAC Models

Model	Description
T1P/2G	One to two tank configuration with generator back-up capability (110VAC)
V1P/2G	One to two tank configuration with generator back-up capability (220VAC)

### Advantages

- Cost-effective system provides up-to-the-minute inventory information.
- State-of-the-art communication capability.
- Feature-rich programming generates detailed inventory management reports.
- Fully compatible with System Sentinel<sup>™</sup> and System Sentinel *AnyWare*<sup>™</sup> remote monitoring software.

## TS-504 and TS-508 Fixed Feature Inventory Control Consoles

This inventory control family of products offers a feature-rich and cost-effective solution for continuous inventory management of fuel sites where in-tank leak detection is not required.



### Specifications

- Number of tanks monitored:  
TS-504 - 4.  
TS-508 - 8.
- Input channels: 2 (10').
- Output only channels: 2 (10').
- Sensor inputs: 8 (24').
- Dimensions: 12" x 11" x 4".
- Display type: alphanumeric LCD.
- Applicable liquids: petroleum, chemicals and hazardous waste.
- Level units: inches or millimeters.
- Volume units: gallons or liters.
- Temperature units: degrees Fahrenheit or Celsius.
- Display size: 2 lines of 40 characters.
- Power requirements:  
115 VAC - +15%, -10%, 100 Watts maximum, 1 Amp maximum.  
230 VAC - +15%, -10%, 100 Watts maximum, 0.5 Amp maximum.
- Operating temperature: 32° to 122 °F (0° to 50 °C).
- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Printer type: 24 column thermal.

### Applications

The TS-504 and TS-508 family of tank monitors is the perfect solution for monitoring and controlling liquid levels in aboveground tanks at:

- Retail fueling sites.
- Fuel distribution depots.
- Heating oil storage terminals.

- Bulk storage locations for other motor fluids.
- Bulk fuel terminals.
- Chemical storage plants.
- Many other inventory control applications not requiring in-tank leak detection.

### Capabilities

- Provides real-time, accurate inventory and delivery information for each tank monitored.
  - Supports up to 24 sensors for sumps, interstitial spaces and test well applications.
  - Can control remote alarms and pumps via multipurpose, high current relays.
  - Self-calibration and diagnostic features quickly notify users of potential problems.
  - Delivers cost-effective overfill protection.
  - Can provide sales throughput information and automated reconciliation of sales and consumption data when used with the INCON dispenser interface module.
  - Multiple monitors can be easily networked to support large tank farms and bulk terminals with more than eight tanks.
  - Can be remotely monitored and controlled via System Sentinel<sup>™</sup> remote fuel management software.
  - Supports multiple languages as well as English and metric units.
- \*Maximum number when including additional options.




## TS-504 and TS-508, 110 VAC Models

Model	Description
T504/4	ATG, up to 4 tanks with 8 sensor inputs
T504P/4	ATG, up to 4 tanks with 8 sensor inputs and printer
T508/8	ATG, up to 8 tanks with 8 sensor inputs
T508P/8	ATG, up to 8 tanks with 8 sensor inputs and printer

## TS-504 and TS-508, 220 VAC Models

Model	Description
V504/4C	ATG, up to 4 tanks with 8 sensor inputs
V504P/4C	ATG, up to 4 tanks with 8 sensor inputs and printer
V508/8C	ATG, up to 8 tanks with 8 sensor inputs
V508P/8C	ATG, up to 8 tanks with 8 sensor inputs and printer

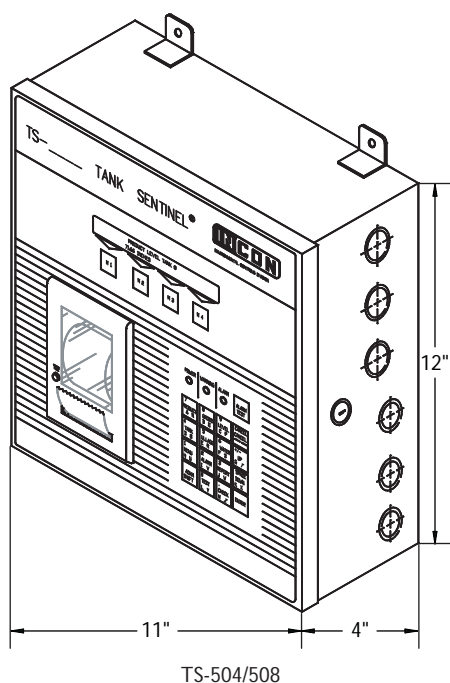

## TS-504 and TS-508 Console Ordering Guide

Console model, software and hardware options can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

**XXXX PM / Y A CLR**

**XXXX** = Model

T504 = TS-504, 120 VAC.  
V504 = TS-504, 220 VAC.  
T508 = TS-508, 120 VAC.  
V508 = TS-508, 220 VAC.

**PM** = Hardware Options

P = Printer, standard.  
M = Internal modem.

**Y A CR** = Software Options

Y = 4 or 8 tanks,  
TS-504 - 4,  
TS-508 - 8.  
A\* = D - data, F - fax/data software.  
C = Continental version.  
R = Reconciliation.  
\*Data and fax/data modem options are mutually exclusive.



### Advantages

- TS-750 compliance tank gauge includes printer and optional continuous 24 hour leak testing (SCALD).
- Capable of multiple alarm modes.
- Uses magnetostrictive technology probes for unparalleled accuracy.
- Reports product and water levels in tank.
- Temperature compensated.
- Will accommodate tanks up to 12 feet in diameter.
- Kits provide for easy ordering and great value.

## TS-750 Fixed Feature Tank Monitoring and Compliance Kits

The TS-750 kit is a complete, easy to order and cost-effective solution for your environmental compliance needs. It provides inventory control and leak detection for sites with up to four underground storage tanks.



### Specifications

- Number of tanks monitored: 1, 2, 3 or 4.
- Output only channels: 2.
- Sensor inputs: 8.
- Dimensions: 12" x 11" x 4".
- Display type: alphanumeric LCD.
- Applicable liquids: petroleum.
- Level units: inches or millimeters.
- Volume units: gallons or liters.
- Temperature units: degrees Fahrenheit or Celsius.
- Display size: 2 lines of 40 characters.
- Power requirements:  
115 VAC - +15%, -10%, 100 Watts maximum, 1 Amp maximum.  
230 VAC - +15%, -10%, 100 Watts maximum, 0.5 Amp maximum.
- Operating temperature: 32° to 122 °F (0° to 50 °C).
- Storage temperature: -4° to 140 °F (-20° to 60 °C).
- Printer type: 24 column thermal.

### Capabilities

- Provides real-time, accurate inventory and delivery information for each tank monitored.
- Can accommodate up to 8 sensors and 4 probes.
- Can control remote visual and audible alarms.
- Delivers cost-effective environmental compliance.
- Easily programmed to meet site-specific criteria.
- Consoles can be field upgraded to add SCALD or internal modem but not increase tanks.

The TS-750 kit consists of the TS-750 compliance monitor, probe(s), float(s) and installation kit. Please specify the diameter of each tank and the product stored in each tank when ordering. The following kits are currently available.


## TS-750 110 VAC Models

Model	Description
T750P/1	Single tank kit with 8 sensor inputs and printer
T750P/1S	Single tank kit with 8 sensor inputs, printer and SCALD
T750P/2	Two tank kit with 8 sensor inputs and printer
T750P/2S	Two tank kit with 8 sensor inputs, printer and SCALD
T750P/3	Three tank kit with 8 sensor inputs and printer
T750P/3S	Three tank kit with 8 sensor inputs, printer and SCALD
T750P/4	Four tank kit with 8 sensor inputs and printer
T750P/4S	Four tank kit with 8 sensor inputs, printer and SCALD

## TS-750 220 VAC Models

Model	Description
V750P/1C	Single tank kit with 8 sensor inputs and printer
V750P/1SC	Single tank kit with 8 sensor inputs, printer and SCALD
V750P/2C	Two tank kit with 8 sensor inputs and printer
V750P/2SC	Two tank kit with 8 sensor inputs, printer and SCALD
V750P/3C	Three tank kit with 8 sensor inputs and printer
V750P/3SC	Three tank kit with 8 sensor inputs, printer and SCALD
V750P/4C	Four tank kit with 8 sensor inputs and printer
V750P/4SC	Four tank kit with 8 sensor inputs, printer and SCALD

Note: The TS-750 kit prices include 4" floats and install kits. 2" floats and install kits are available for an additional cost. Contact FFS Customer Service for pricing.

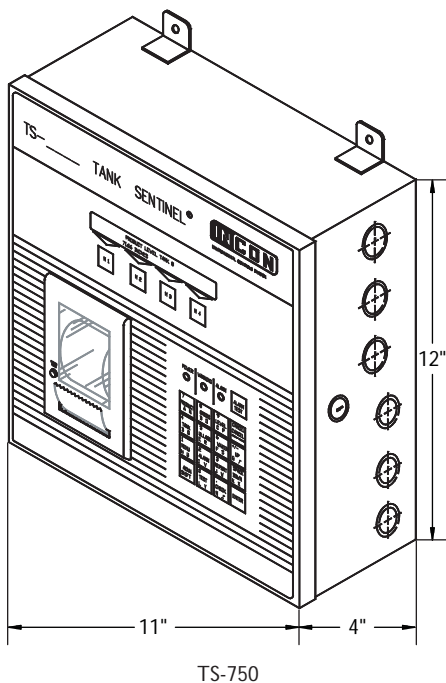

## TS-750 Console Ordering Guide

The TS-750 is designed specifically for underground fuel storage tanks. When ordering, specify the number of tanks, the diameter of each tank and the product type for each tank. INCON will provide the appropriate TS-750 tank gauge, probes, floats and installation kits for each site.

Console model, software and hardware options can be listed separately or combined when ordering. Systems shipped from the factory will list the combined part number. Complete console part numbers have a specific order and are created using the following guidelines:

**XXXX PM / Y A B C**

**XXXX** = Model

T750 = TS-750, 120 VAC.

V750 = TS-750, 220 VAC.

**PM** = Hardware Options

P = Printer, standard.

M = Internal modem.

**Y A B C** = Software Options

Y = 1, 2, 3 or 4 tanks.

A = S, SCALD.

B\* = D - data, F - fax/data software.

C = Continental version.

\*Data and fax/data modem options are mutually exclusive.

## Internal Console Hardware Enhancements

Part Number	Description
TSSP-FDM2	(M) Internal modem, see software enhancements

## Console Software Enhancements

Part Number	Description
TS-SCALD*	(S) Statistical Continuous Automatic Leak Detection, 24 hour continuous tank testing software
TS-DOM2**	(D) Data only modem software
TS-FM2**	(F) Fax and data modem software
TS-LLDI***	(L) Line leak detector interface software
TS-Reconciliation****	(R) Dispenser reconciliation software

\*SCALD is not available with inventory control consoles or back-up generator consoles (the S in the console part number identifies this option). SCALD is used in 24 hour locations for tank leak testing.

\*\*TSSP-FDM2 internal modem hardware is required (the M before the forward slash in the console part number identifies this option). Choose data only modem software to support System Sentinel™ software, or choose fax and data modem software when faxed reports are required.

\*\*\*Electronic line leak detector hardware is required (the L in the console part number identifies this option). This interface software enables line leak detector compliance reporting and line leak test scheduling capability. Not available on the TS-750 console.

\*\*\*\*TS-DIM dispenser interface module hardware is required (the R in the console part number identifies this option). This option provides automated inventory reconciliation. Not available on the TS-750 console.

## Upgrading Installed Tank Sentinel<sup>®</sup> Consoles

Upgrade	Description
Internal modem	TSSP-FDM2 internal modem hardware TS-DOM2 data only modem software or TS-FM2 fax and data software
24 hour leak detection	TS-SCALD statistical, continuous automatic leak detection software
Line leak	Appropriate TS-LS300 or TS-LLD TS-LLDI line leak detector interface software
Automated inventory reconciliation	Appropriate TS-DIM dispenser interface module TS-Reconciliation dispenser reconciliation software

Note: When placing order to upgrade installed consoles, the serial number of the console to be upgraded must be supplied.

## Paper Supplies

Part Number	Description
TS-TP2	One box of 5 rolls of thermal printer paper for Tank Sentinel <sup>®</sup> consoles
TS-TP2C	One case of 20 boxes of 5 rolls of thermal printer paper for Tank Sentinel <sup>®</sup> consoles



S940 Sensor Alarm Console

The S940 Sensor Alarm Console is a cost effective solution for tank overfill protection and sensor leak detection needs. This easy-to-install-and-operate device monitors up to four tanks, containment sumps or interstitial spaces and provides an audible and visual indication of an alarm condition. Two programmable relay outputs are included to sound an external alarm or send a signal to a building control or monitoring system. The weather proof enclosure allows the S940 Sensor Alarm Console to be conveniently installed indoors or out.



Advantages

- Monitors up to 4 sensors for overfill or leak detection
- Simple to install and configure
- Can be installed indoors or outdoors
- Cost effective leak detection or overfill solution
- Connect to remote alarms or external devices

Specifications

- Input channels: 4  
(2-wire float switch sensor inputs)
- Output channels: 2  
(dry contact relay outputs)
- Internal audible alarm
- Alarm, power and output LEDs
- Compatible Franklin Fueling Systems 2-wire sensors
  - TSP-ULS universal liquid sensor
  - TSP-HLS high level sensor
  - TSP-HFS horizontal float switch
  - TSP-UHS universal hydrostatic sensor
- Dimensions 6" x 6" x 4"
- Power requirements: 100-240 VAC +/- 10%, 50/60 Hz, 15 W max
- Operating temperature: -13 to +140 °F (-25 to +60 °C)
- Enclosure: NEMA 4, indoor / outdoor (non-hazardous locations only)

Capabilities

- Tank overfill alarm
- Steel or fiberglass tank interstitial monitoring
- Containment sump monitoring
- General liquid sensor monitoring
- Programmable relay outputs for remote alarm or external device interface

Approvals

- UL, cUL, associated apparatus, non hazardous location
- Provides intrinsically safe circuits for sensors located in Class 1, Div 1, Group D hazardous location

Model	Description
S940	Four channel sensor alarm console

## Advantages

- Automatically learns exact pipeline characteristics.
- No pipe type and length programming required.
- Monitors flexible, steel and/or fiberglass pipelines in any combination up to certified maximum values.
- Works with submersible pumps generating 25 psi or more.
- Automatically performs 3.0 gph, 0.2 gph and 0.1 gph line tests.
- Positive submersible pump shutdown in the event of a leak.
- Can be monitored through ATG and System Sentinel™.
- Third party certified for 0% probability of false alarm.
- Eliminates the need for factory calibration or on-site field judgments for set-up.
- For use in rigid, flex and rigid/flex piping configuration.
- Immediate notification of alarm condition.
- Allows printed compliance reports.

## TS-LS300 AutoLearn™

The TS-LS300 AutoLearn™ line leak detection system learns the exact characteristics of each line, ensuring unparalleled accuracy. It can run independently or with any INCON TS-1001, TS-2001, TS-504 or TS-508 tank gauge.



## Console Specifications

- Number of lines monitored: 1, 2, 3 or 4.
- Dimensions: 11" x 12" x 4".
- Power requirements:  
115 VAC - +15%, -10%, 100 Watts maximum, 1 Amp maximum.  
230 VAC - +15%, -10%, 100 Watts maximum, 0.5 Amp maximum.
- Operating temperature: 20° to 122 °F (10° to 50 °C).
- Intrinsic safety rating: Associated Apparatus II (1) G [EEX Ia] IIA.

- Belden cable: #9363-22 AWG, #9364-20 AWG or #9365-18 AWG.
- Max. sensor to console cable distance: 500' (152.4 M).
- Sensor port fitting: 2" female NPT.
- Sensor material: anodized aluminum body and stainless steel sensor.
- Intrinsic safety rating: Class 1, Div. 1, Group D, II (1) G [EEX Ia] IIA T4
- Explosion proof: Class 1, Div. 1, Group D.

## Capabilities

- The TS-LS300 performs a 3.0 gph leak and pressure test after every dispense. Upon detection of a failed test, the LS300 will alarm and positively shutdown the affected turbine.
- The TS-LS300 continuously monitors pressurized lines for thermally stable conditions and performs a 0.2 gph monthly and 0.1 gph annual precision leak test during the thermally stable union.
- AutoLearn™ line leak detection technology is also available with the TS-LS500, part of the TS-550 and TS-5000 fuel management systems.

## Leak Sensing Transducer Specifications

- Number of lines monitored: 1.
- Dimensions: 6-1/4" x 2" NPT.
- Applicable liquids: motor fuels.
- Power requirements:  
10 to 20 VDC from console.
- Operating temperature: -40° to 149 °F (-40° to 66 °C).
- Operating pressure: 0 to 100 psi (0 to 689 kPa).

## TS-LS300, 115 VAC 50/60 Hz Models

### Intrinsically Safe

For new installations where separate low voltage conduits can be used.

Model	Description
TS-LS300/2	2-line console with line calibration kit
TS-LS300/3	3-line console with line calibration kit
TS-LS300/4	4-line console with line calibration kit

Note: All AutoLearn™ models include the TPI turbine pump interface module.

### Explosion Proof

For retrofit installations where only a high voltage conduit can be used.

Model	Description
TS-LS300E/2	2-line console with line calibration kit
TS-LS300E/3	3-line console with line calibration kit
TS-LS300E/4	4-line console with line calibration kit

Note: All AutoLearn™ models include the TPI turbine pump interface module.

## TS-LS300, 230 VAC 50/60 Hz Models

### Intrinsically Safe

For new installations where separate low voltage conduits can be used.

Model	Description
VS-LS300/2	2-line console with line calibration kit
VS-LS300/3	3-line console with line calibration kit
VS-LS300/4	4-line console with line calibration kit

Note: All AutoLearn™ models include the TPI turbine pump interface module.


### Interface Cable

For connecting two AutoLearn™ consoles together.


Model	Description
TSSP-ALICBL	AutoLearn™ interface cable

## Alternative Fuels Accessories

Model	Description
TS-AFALNIP	Leak generator needle valve kit required for E85 installations



TS-LS300

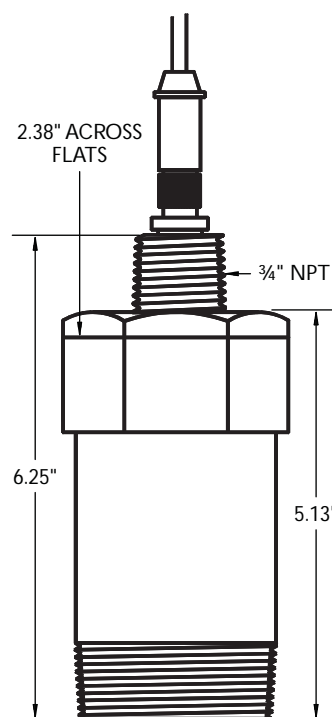

2" NPT

TS-LSU300 TRANSDUCER



## Advantages

- The TS-LLD leak detector performs gross leak tests after each 3.0 gph dispense, the monthly 0.2 gph test and the annual 0.1 gph test.
- Performs positive shutdown if a leak is detected.
- Tests performed at full pump pressure to ensure integrity of lines.
- Carries numerous regulatory approvals.
- Low-cost, wireless installation retrofits easily into the existing submersible turbine pump housings without excavation.

## Line Sentinel™

The INCON TS-LLD line leak detector uses patented, flow-based technology to perform multiple line tightness tests.



## Specifications

- Dimensions:  
Console - 4-3/8" x 3-3/8" x 2-5/16".  
Line leak detector - 23-1/2" x 2-3/8".
- Applicable liquids: gasoline and diesel motor fuels.
- Gross leak test (3.0 gph): yes.
- Monthly test (0.2 gph): yes.
- Annual test (0.1 gph): yes.
- Indicates days since 0.2 gph test passed: yes.
- LED unit: yes.
- Positive shut-down: yes.
- Tank Sentinel® interface: yes.

## Applications

The TS-LLD can be used in most pressurized applications, in any new or existing turbine pump housing and can be used in place of a mechanical leak detector.

- Third party certified with 100% probability of leak detection and a 0% probability of false alarm.
- Supports rigid, fiberglass and flexible piping systems.
- Line leak test failure indicated by alarm.
- Works as a stand-alone unit or interfaced with INCON Tank Sentinel® consoles.

**Note:** The presence of the integral in-line check valve of the TS-LLD during normal operation creates a pressure drop which will reduce the total flow potential of the submersible pump. Some of the pressure drop can be compensated by upgrading the submersible pump motor. To ensure

desirable flow rates are achieved, we do not recommend TS-LLD in the following sites:

- where it is imperative to achieve 10 gpm.
- sites that frequently have more than 4 nozzles open at a time.

In such cases we recommend our AutoLearn™ pressure-based electronic leak line detector.

## Capabilities

The INCON TS-LLD line leak detector performs a variety of tests for environmental compliance.



- Eliminates slow-flow problems associated with mechanical leak detectors.
- Immediately identifies leaks even in changing thermal conditions, unlike mechanical LLDs.
- Performs continuous testing using highly sensitive volumetric flow technology.
- Continuously performs self-diagnostic test to ensure proper system operation.

# Electronic Line Leak Detectors



Model	Description
TS-LLD/FE	Electronic line leak detector with an FE Petro installation adapter, one required for each submersible pump
TS-LLD/RJ	Electronic line leak detector with a Red Jacket installation adapter, one required for each submersible pump
TS-LLD/RJQ	Electronic line leak detector with a Red Jacket Quantum installation adapter, one required for each submersible pump

Note: RJ represents Red Jacket, a trademark of Veeder-Root Co.

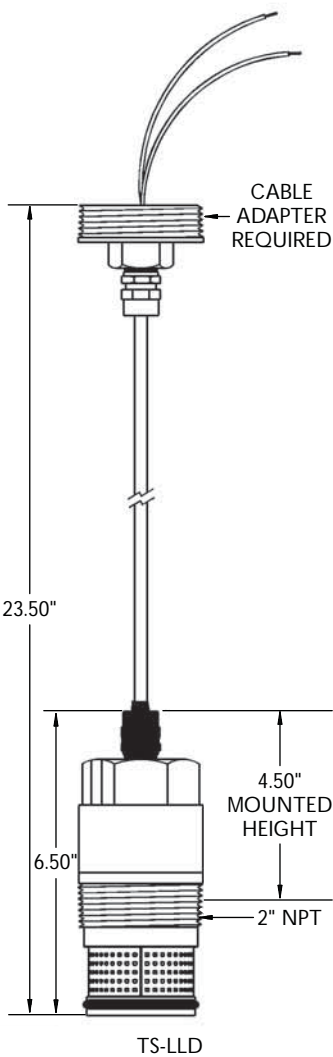

## Advantages

- Easy to use and install.
- Uses innovative, magnetostrictive position measurement technology to report liquid levels.
- Highly stable performance.
- Unparalleled accuracy and performance when used with a Franklin Fueling Systems Automatic Tank Gauge.
- Screw-in electrical connector provides quick installation or removal eliminating the need to resplice wires.
- Intrinsically safe circuits for hazardous locations.

## Theory of Operation

- An electromagnetic field is created inside the probe head and forms around a long waveguide within the probe shaft when position measurements are taken.
- The electromagnetic field interacts with the magnetic field of the float(s) and produces a shock wave in the waveguide that travels at a known speed.
- When the shock wave is detected at the probe head, the probe creates a signal that corresponds precisely to the product level.
- Product expansion calculations are enabled by temperature sensors that are located at various points in the probe shaft.

# Leak Detection and Inventory Control Probes

TSP-LL2 liquid level probes are advanced instruments that use magnetostrictive position measurement technology to accurately report inventory levels in storage tanks.



## Specifications

- Operating temperature: -40° to 140 °F (-40° to 60 °C).
- Storage temperature: -40° to 158 °F (-40° to 70 °C).
- Intrinsic safety rating: Class 1, Div. 1, Group D.
- Non-linearity:  $\pm 0.025\%$  of full scale.
- Repeatability:  $\pm 0.001"$ .
- Temperature sensors: Up to 5 thermistors located in the shaft.
- Temperature resolution:  $\pm 0.02$  °F ( $\pm 0.01$  °C).
- Probe pigtail: Two 10' long conductor cables with shields and polyurethane jacket.
- Interface cable:
  - 0' to 200' - Belden 87760.
  - 0' to 400' - Belden 87761.
  - 0' to 1500' - Belden 89182.
  - Consult factory for others.
- Shaft, E-ring and washer materials:
  - Housing - #316 stainless steel anodized aluminum, MIL-A-8625C, Type 2, Class 2.
  - Floats - nitrophyl, Kynar and nickel plated brass.
- Float kits must be ordered separately.

- The TSP-LL2-I probe is used for aboveground storage tanks, chemical or oil waste, and inventory only applications.
- Probes are available in many sizes that are suitable for all common tanks.
- Easily installed into 4" riser pipes or optionally into 3" or 2" riser pipes with reducer fitting.

## Capabilities

- Probes can report the level of one or two floats.
- The TSP-LL2 is capable of precise leak detection, density measurement and inventory monitoring.
- The TSP-LL2-1 is capable of density measurement and inventory monitoring.
- Use the appropriate FFS installation kit to suspend all TSP-LL2 probes and TSP-LL2-I probes doing density measurement.
- TSP-LL2-1 probes include hardware for tank bottom installation when not performing density measurement.
- Float kits must be ordered separately.

## Applications

The LL2 Series of liquid level probes feature exceptional linearity, resolution and stability, and are used in underground and aboveground storage tanks. Two types of probes are manufactured for use with Franklin Fueling Systems Automatic Tank Gauges.

- The TSP-LL2 probe is used for underground storage tanks and petroleum applications when static or SCALD leak detection is required.




Model	Description
TSP-LL2-29	2' diameter tank probe
TSP-LL2-41	3' diameter tank probe
TSP-LL2-53	4' diameter tank probe
TSP-LL2-65	5' diameter tank probe
TSP-LL2-69	5'4" diameter tank probe
TSP-LL2-77	6' diameter tank probe
TSP-LL2-81	6'4" diameter tank probe
TSP-LL2-89	7' diameter tank probe
TSP-LL2-101	8' diameter tank probe
TSP-LL2-113	9' diameter tank probe
TSP-LL2-125	10' diameter tank probe
TSP-LL2-131	10'6" diameter tank probe
TSP-LL2-137	11' diameter tank probe
TSP-LL2-149	12' diameter tank probe

Notes: 1. Custom probe lengths are available; contact factory for price and delivery.  
 2. These probes are used with all Franklin Fueling Systems ATG consoles.  
 3. Float kits must be ordered separately.

Model	Description
TSP-LL2-29-I	2' diameter tank probe
TSP-LL2-41-I	3' diameter tank probe
TSP-LL2-53-I	4' diameter tank probe
TSP-LL2-65-I	5' diameter tank probe
TSP-LL2-69-I	5'4" diameter tank probe
TSP-LL2-77-I	6' diameter tank probe
TSP-LL2-81-I	6'4" diameter tank probe
TSP-LL2-89-I	7' diameter tank probe
TSP-LL2-101-I	8' diameter tank probe
TSP-LL2-113-I	9' diameter tank probe
TSP-LL2-125-I	10' diameter tank probe
TSP-LL2-131-I	10'6" diameter tank probe
TSP-LL2-137-I	11' diameter tank probe
TSP-LL2-149-I	12' diameter tank probe
TSP-LL2-161-I	13' diameter tank probe
TSP-LL2-173-I	14' diameter tank probe
TSP-LL2-185-I	15' diameter tank probe
TSP-LL2-197-I	16' diameter tank probe
TSP-LL2-209-I	17' diameter tank probe
TSP-LL2-221-I	18' diameter tank probe

Notes: 1. Orders for probes larger than 149" cannot be canceled and are non-returnable.  
 2. These probes are used with Franklin Fueling Systems ATGs.  
 3. Liquid level inventory only probe.  
 4. Float kits must be ordered separately.

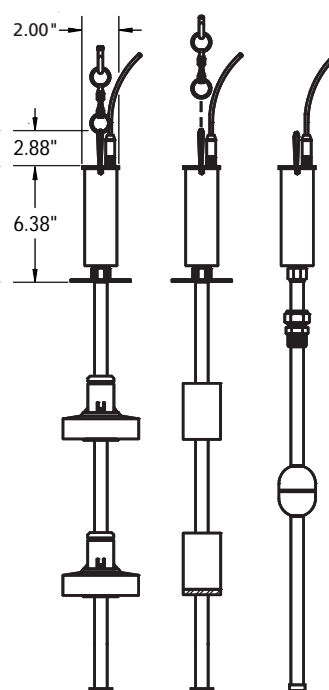


### Advantages

- Can be used in any tank up to 50' high.
- Suitable for all petroleum and many industrial applications.
- Available as a complete system or retrofit.


## Moorman Level Gauge Kit

The Moorman level gauge kit includes the complete Moorman gauge (7S for 35' tanks and 9S for 50' tanks) and the appropriate length magnetostrictive inventory probe. The Moorman level gauge retrofit kit includes the appropriate length magnetostrictive inventory probe and probe mounting accessories. TSP-UVPK ultraviolet protection kit is included.

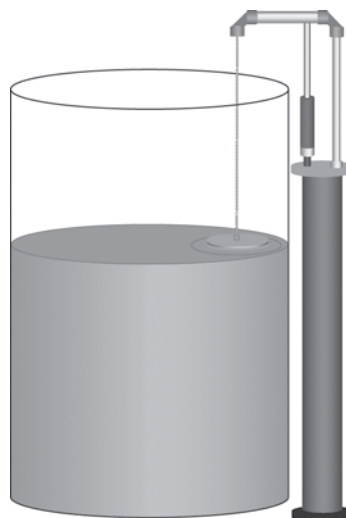

Model	Description
TSP-MLGK-35	Standard gauge kit for vertical tanks up to 35'
TSP-MLGK-35-M	Standard gauge for vertical tanks up to 35' with metric display
TSP-MLGKSS-35	Standard gauge for tanks up to 35' with stainless steel tape and float
TSP-MLGKSS-35-M	Standard gauge for tanks up to 35' with metric display, with stainless steel tape and float
TSP-MLGK-50	Standard gauge for vertical tanks up to 50'
TSP-MLGKSS-50	Standard gauge for tanks up to 50' with stainless steel tape and float
TSP-MRFK-35	Retrofit gauge kit for vertical tanks up to 35'
TSP-MRFK-50	Retrofit gauge kit for vertical tanks up to 50'

## Float Kits

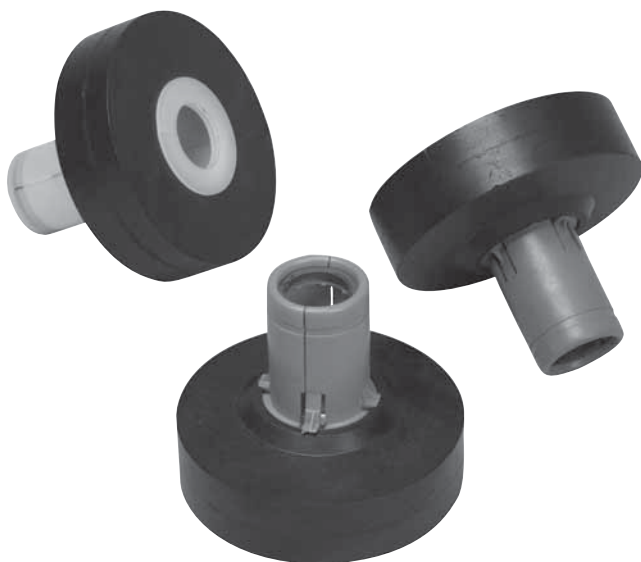

Model	Description
TSP-IDF2	2" float set for diesel tanks
TSP-IGF2	2" float set for gasoline tanks
TSP-IDF3	3" float set for diesel tanks
TSP-IGF3	3" float set for gasoline tanks
TSP-IDF4	4" float set for diesel tanks
TSP-IGF4	4" float set for gasoline tanks
TSP-LPGF	2" float for LPG tanks, with or without isolation sleeve
TSP-SSP	2-1/16" OD, #316 stainless steel float for chemical applications only

Note: Order one float set for each LL2 Mag probe.

### 2", 3" and 4" Float Kit Advantages

- Designed for applications involving 2", 3" or 4" riser pipes.
- Each float set contains a product and water float.
- Constructed of nitrile rubber water float containing a nickel plated ballast that is compatible with a wide variety of petroleum products.
- 2" water floats are stamped G for gasoline and D for diesel.
- 3" and 4" water floats are colored red for gasoline and blue for diesel.

### TSP-SSP Chemical Float Advantages

- #316 stainless steel product float with 2-1/16" OD.
- Suitable for use in a wide variety of chemical applications, consult factory for chemical compatibility issues.
- Use one float per TSP-LL2-I probe.
- Float specific gravity 0.55 to 0.63.
- Collapse pressure 500 psi/g minimum.

### LPG Float Advantages

- Designed for applications involving tank openings of at least 2".
- Single float used for monitoring the level of LPG (propane) fuel.
- Suitable for monitoring pressurized products.
- For use in USTs or ASTs with TSP-LL2 or TSP-LL2-I probes. TSP-LPG/EU float can be used with locally supplied tank isolation sleeves.



### Advantages


- Designed for applications involving 4" riser pipes.
- Each float set contains a product, density and water float.
- Floats are constructed of nitrile rubber and are nickel plated.
- Water and product floats are colored red for gasoline and blue for diesel.
- Density and product floats are calibrated and must be maintained as a set.

### Theory of Operation

Density measurement is based on the distance between the calibrated product and density floats. As the density of the fuel changes, the gap between the floats will increase or decrease in proportion to the change. The tank gauge receives this information from the probe and uses it to calculate and display the current density of the fuel.

## Density Measurement Float Kit

The Colibri and T5 Series fuel management systems have the ability to continuously monitor the density of fuel stored in underground and aboveground storage tanks. The same LL2 magnetostrictive probe that provides inventory management and leak detection capabilities can also supply product density without the addition of extra probes or sensors. Programmable high and low density alarm points allow the user to determine the range of acceptable density fluctuations.

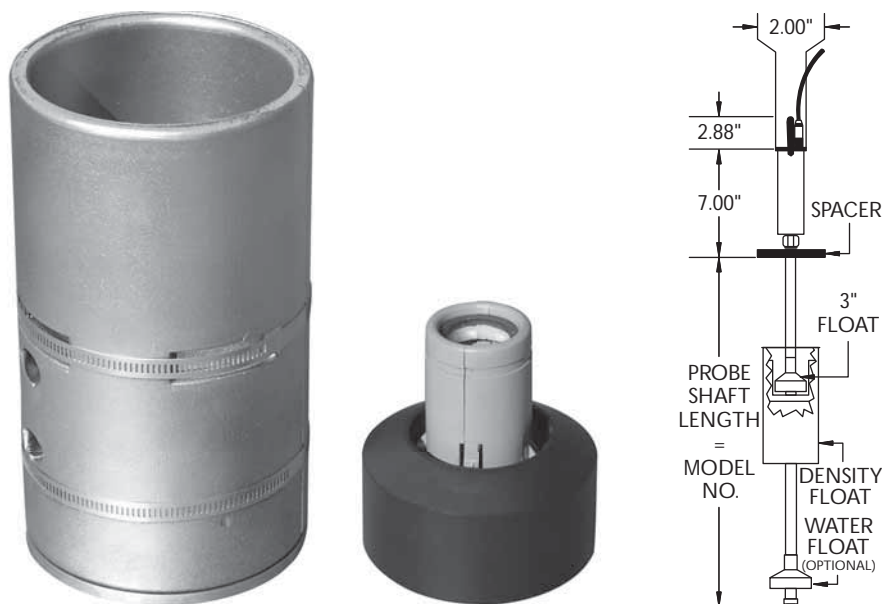

Part Number	Description	Density Range
TSP-IDF4D	Diesel/fuel oil density float kit	790-900 kg/m <sup>3</sup>
TSP-IGF4D	Gasoline density float kit	690-800 kg/m <sup>3</sup>

Note: Order one density measurement float kit for each magnetostrictive probe. Probes used with density float kits must have serial numbers greater than 6000000.

## Probe Installation Kits

Probe installation kits are used to install TSP-LL2 liquid level probes in underground tank applications. They are designed to allow the probe to be suspended in either 2" or 4" riser pipes. This method of installation guarantees that the probe can provide accurate level information and that the tank is sealed in accordance with regulatory requirements. It also provides excellent protection for the probe. The probe installation kit makes it easy to install TSP-LL2 liquid level probes properly and safely. The probe installation kit actually suspends the level probe from the top of the riser. The kit is designed so that the probe and cable do not twist during installation and so the cable is sealed and strain relieved. It also allows easy access to the probe for inspection if required. The probe installation kit allows you to install level probes in almost any underground tank. It works equally well in fiberglass and steel tanks and can be adjusted to accommodate tanks buried at almost any depth.



### Advantages

- The TSP-K4AS install kit is for use with chemical or other installations where it is desirable for the probe head to be outside of the riser. It consists of a #316 SS 4" cap and compression fitting that is installed on the probe shaft so that only the floats and shaft are exposed to the tank contents. Includes TSP-UVPK probe head protection kit.
- The TSP-LPGK install kit is for use with pressurized LPG tanks where the probe head will reside outside of the tank opening. It consists of a special compression fitting, designed to retain the contents of the pressurized tank, that is installed on the probe shaft and then inserted into a user supplied cap with a 3/4" NPT hole. Includes TSP-UVPK probe head protection kit.

Part Number	Description
TSP-K2A	Mag probe install kit for 2" riser pipes
TSP-K2B	Mag probe install kit for 2" riser pipes with BSP threads
TSP-K4A	Mag probe install kit for 4" riser pipes
TSP-K4AS	#316 stainless steel mag probe install kit for 4" riser pipes
TSP-K4B	Mag probe install kit for 4" riser pipes with BSP threads
TSP-LPGK	LPG probe install kit, 149" maximum LL2 probe length

Note: TSP-LPGK install kit is not needed when locally supplied tank isolation sleeve is utilized.

### Cables

Part Number	Description
600-0042	Belden #87761, runs up to 500' (500' rolls)
600-0055	Belden #89182, runs 500' to 1,500' (500' rolls)
600-0080	Quick disconnect probe cable

- Notes: 1. Cable is sold in 500' rolls.  
2. Use only these cables with the TSP-LL2 and TSP-LL2I probes.

### Accessories

Part Number	Description
TSP-DB1	One direct burial splice connector kit
TSP-DB10	Pack of 10 direct burial splice connector kits
TSP-DBTOOL	Epoxy dispensing tool
TSP-KW30	Pack of 30 3M splice connectors
TSP-UVPK	Ultraviolet protection kit - protects probe electronics when installed in AST applications

- Notes: 1. Use the TSP-DB1 or TSP-DB10 for direct burial cable applications or when weatherproof junction boxes are not used.  
2. The DBTOOL is required to dispense the epoxy.  
3. Each direct burial splice connector kit includes a receptacle, three splice connectors and epoxy for the dispensing tool.

### Application

For liquid-filled tank interstitial monitoring.

### Advantages

- Versatile sensor for virtually all fiberglass double wall tanks equipped for hydrostatic leak detection.
- Microcomputer monitors liquid at varying levels within tanks and relays digitally encoded status information via the fail-safe Brite™ sensor digital communication system to fuel management system or Tank Sentinel® consoles, alerting of any alarm conditions.

### Installation

- Lower TSP-HIS to the bottom of the brine reservoir of double wall tank.
- The normal brine level should reside half way up the sensor.
- Sensors include the TSP-KV4 vented 4" riser cap.

## TSP-HIS Hydrostatic Interstitial Brite™ Sensor

The TSP-HIS hydrostatic interstitial Brite™ sensor detects leaks in double wall tanks where the interstitial space is filled with a liquid brine solution. For use with all Tank Sentinel® and fuel management systems, the TSP-HIS polyester, nitrile and epoxy construction is compatible with all types of brine.



Model	Description
TSP-HIS	Hydrostatic interstitial Brite™ sensor, 11"
TSP-HIS-XL	Hydrostatic interstitial Brite™ sensor, 21"
TSP-KV4	Hydrostatic sensor vented riser pipe cap kit for 4" riser pipes

Note: This sensor communicates with the console using 3 wires.

\*Not including cable.

## TSP-DIS Discriminating Interstitial Brite™ Sensor

The TSP-DIS discriminating interstitial Brite™ sensor detects the presence of various liquids in tanks as well as sumps and other locations. The TSP-DIS is designed to interface with the Tank Sentinel® and fuel management system.



Model	Description
TSP-DIS	Discriminating interstitial Brite™ sensor
TSP-KI2	Interstitial sensor riser cap kit for 2" riser pipes

Note: This sensor communicates with the console using 3 wires.

### Application

For dry tank interstitial monitoring.

### Advantages

- Installs in the interstitial space of steel and fiberglass double wall tanks and sumps.
- Uses light beam traveling through probe to determine if sensor is wet.
- Microprocessor inside sensor interprets readings and communicates data to the Tank Sentinel® and fuel management system.
- Fail-safe digital communications with built-in alarm if sensor malfunctions.
- Sensor can distinguish between petroleum and water.
- Alarms indicate petroleum present, water present and sensor malfunction.

### Installation

Each TSP-DIS comes with 25' of oil-resistant cable. For fiberglass tanks, TSP-DIS is pulled into the interstitial space using a "fish" string or wire. For steel interstitial tanks, TSP-DIS is lowered directly to the bottom of the interstitial space through a 2" NPT fitting provided for that purpose on the tank. Optional installation kits are available which include a riser cap and other parts required to complete installation.



### Application

For dry tank interstitial monitoring.

### Advantages

- Highly accurate electro-optic technology and closed output circuit ensures that leaks are detected.
- Chemical-resistant materials.
- Can be installed in fiberglass or steel double wall tanks.
- Utilizes light emitting diodes and prisms to indicate if a leak has occurred.

### Installation

Each TSP-EIS comes with 25' of oil-resistant cable. For fiberglass tanks, TSP-EIS is pulled into the interstitial space using a "fish" string or wire. For steel interstitial tanks, TSP-EIS is lowered directly to the bottom of the interstitial space through a 2" NPT fitting provided for that purpose on the tank. Optional installation kits are available which include a riser cap and other parts required to complete installation.

## TSP-EIS Electro-Optic Interstitial Sensor

The TSP-EIS electro-optic interstitial sensor may be used with all Tank Sentinel<sup>®</sup> and fuel management system consoles. Utilizing electro-optic technology and made of chemically resistant polysulfone plastic, the TSP-EIS may be installed in sumps, double wall tanks or other locations where the presence of liquid indicates a leak has occurred.



Model	Description
TSP-EIS	Electro-optic interstitial sensor
TSP-K12	Interstitial sensor riser cap kit for 2" riser pipes

Note: This sensor communicates with the console using 3 wires.

## TSP-ULS Liquid Sensor

The TSP-ULS liquid sensor is a low cost sensor which may be used with all Tank Sentinel® and fuel management system consoles. This sensor is also compatible with S940 Sensor Alarm Console. Based on float-switch technology and made of chemically resistant materials, the TSP-ULS may be installed in sumps, dispenser pans, steel double wall tanks or other locations where the presence of liquid indicates a leak has occurred.



Model	Description
TSP-ULS	Universal liquid sump sensor
TSP-K12	Interstitial sensor riser cap kit for 2" riser pipes

Note: This sensor communicates with the console using 2 wires.

## TSP-UHS Universal Hydrostatic Sensor

The TSP-UHS Universal Hydrostatic Sensor uses float switch technology to continuously monitor liquid filled double wall containment sumps. Normally submerged, the single float TSP-UHS will provide an indication if there is a loss of monitoring liquid.



Model	Description
TSP-UHS	Universal Hydrostatic Sensor
HM-KIT	Hydrostatic monitoring installation kit. Includes: flexible brine tube, sensor housing clamp, sensor housing, sensor cap and hardware

Note: This sensor communicates with the console using 2 wires.

### Application

For dry steel tank interstitial and containment sump monitoring.

### Advantages

- Highly reliable float technology and closed output circuit ensures that leaks are detected.
- Chemical-resistant materials assure compatibility with most liquids.

### Installation

Each TSP-ULS comes with a 25' cable. 1/2" NPT thread is provided on the compression gland fitting attached to the sensor's cable, allowing it to be suspended from standard electrical boxes and fittings. The sensor may be positioned vertically by adjusting cable length. For steel interstitial tanks, TSP-ULS is lowered into the opening provided on the tank and is suspended by optional TSP-K12 installation kit. Other mounting methods available depending upon application and location.

### Application

Typically used for hydrostatic monitoring of the liquid in a double wall sump interstice.

### Advantages

- Highly reliable float technology and closed output circuit ensures that leaks are detected.
- Chemical-resistant materials.

### Installation

Each TSP-UHS comes with a 25' cable. The sensor can be installed into the reservoir of a liquid filled double wall containment sump. The sensor must be installed in a vertical position at a level where it is normally submerged. The TSP-UHS will alert if the liquid level drops below the bottom of the sensor.

### Application

For containment sump monitoring.

### Advantages

- Utilizes proven magnetostrictive technology.
- Water warning, water alarm and product alarm.
- Tamper protection feature will alarm if sensor is moved from installed position.
- Will alarm and recover quickly when hydrocarbons are present.

## TSP-DMS Discriminating Magnetostrictive Sensor

The TSP-DMS is a fast acting discriminating sensor that utilizes magnetostrictive technology to provide reliable monitoring of dispenser pans and containment sumps. Its floats can detect the presence of water or hydrocarbons and also ensure that the sensor installation has not been tampered with. The TSP-DMS can report water warnings and programmable water alarm points as well as product alarms. The TSP-DMS is used with fuel management system consoles.



Model	Description
TSP-DMS-12	Discriminating magnetostrictive sensor, 12"
TSP-DMS-24	Discriminating magnetostrictive sensor, 24"
TSP-KS	Uni-Strut <sup>®</sup> mounting kit

Notes: 1. For use with the T5 Series fuel management systems.  
2. This sensor communicates with the console via the TS-PRB probe module.  
3. Requires Controller Module software version 9.5 or greater.

## TSP-DDS Discriminating Dispenser Sump Brite™ Sensor

The TSP-DDS is a discriminating dispenser sump Brite™ sensor which provides reliable monitoring of dispenser pans and containment sumps. Combining magnetic float switch sensors with an innovative polymer strip, the TSP-DDS generates three different alarms for the detection of hydrocarbons, for liquid in sump and when the sump is full. The TSP-DDS may be used with both fuel management system and Tank Sentinel® consoles.



Model	Description
TSP-DDS	Discriminating dispenser sump Brite™ sensor
TSP-KS	Uni-Strut® mounting kit

Note: This sensor communicates with the console using 3 wires.

## TSP-DTS Discriminating Turbine Sump Brite™ Sensor

The TSP-DTS is a discriminating turbine sump Brite™ sensor that detects the presence of liquid and hydrocarbons when installed in turbine and containment sumps. TSP-DTS is designed to interface with Tank Sentinel® and fuel management system.



Model	Description
TSP-DTS	Discriminating turbine sump Brite™ sensor
TSP-KS	Uni-Strut® mounting kit

Note: This sensor communicates with the console using 3 wires.

### Application

For containment sump monitoring.

### Advantages

- Uses magnetic float switches to detect liquid at two levels.
- Innovative polymer strip detects hydrocarbons along sensor and floating on water.
- Compatible with common fuels and chemicals.
- Detects liquid at 1-1/2" from base.
- Detects hydrocarbons on sensor and floating on water.
- Digitally encoded status information sent from microcomputer to console from 775+ feet.
- Alarms to indicate liquid in sump, hydrocarbon detected, sump is full and sensor malfunction.

### Installation

Variety of mounting methods possible depending on location. Bracket provided for quick installation.

### Application

For containment sump monitoring.

### Advantages

- Uses magnetic float switches to detect liquid at two levels.
- Innovative polymer strip detects hydrocarbons along sensor and floating on water.
- Compatible with common fuels and chemicals.
- Detects liquid at 1-1/2" from base.
- Detects hydrocarbons on sensor and floating on water.
- Digitally encoded status information sent from microcomputer to console from 775+ feet.
- Alarms to indicate liquid in sump, hydrocarbon detected, full sump and sensor malfunction.



**Application**

For use in dry monitoring wells.

**Advantages**

- Detects vapor, gas and rising groundwater when installed in a monitoring well.
- Fail-safe digital communication with built-in alarm if sensor malfunctions.
- Senses ambient temperature to minimize false alarms.
- Equipped with twenty feet of oil-resistant cable for installation in 2" and 4" monitoring wells located around underground tanks.
- Senses vapor, gas and groundwater.
- Communicates with console from 775+ feet.
- Alarms to indicate sensor malfunction.

**Application**

For use in wet monitoring wells.

**Advantages**

- Unique alarms for the detection of hydrocarbons or decreased groundwater levels.
- Completely reusable even after several exposures to hydrocarbons.
- Available in four different lengths to accommodate well depth.
- Microcomputer within TSP-MWS detects presence of hydrocarbons and alerts Tank Sentinel<sup>®</sup> and fuel management system of alarm conditions via digitally-encoded information.

**Installation**

- Normally installed in 4" groundwater monitoring wells.
- Integral well cap may be locked with standard padlock to prevent unauthorized access.

## TSP-DVS Discriminating Vapor Brite™ Sensor

The TSP-DVS is a discriminating vapor Brite™ sensor that detects the presence of gas or vapor molecules when installed in dry monitoring wells or containment space where vapor detection is necessary. TSP-DVS is designed to interface with the Tank Sentinel<sup>®</sup> and fuel management system.



Model	Description
TSP-DVS	Discriminating vapor Brite™ sensor
TSP-KW4	Vapor sensor monitoring well pipe cap kit for 4" riser pipes

Note: This sensor communicates with the console using 3 wires.

## TSP-MWS Monitoring Well Brite™ Sensor

The TSP-MWS monitoring well Brite™ sensor is a discriminating liquid sensor which detects the presence of hydrocarbon floating on groundwater. Using a float switch and innovative conductive polymer strip, the TSP-MWS identifies hydrocarbons anywhere along the length of the sensor.



Model	Description
TSP-MWS-10	Monitoring well Brite™ sensor, 10'
TSP-MWS-15	Monitoring well Brite™ sensor, 15'
TSP-MWS-20	Monitoring well Brite™ sensor, 20'
TSP-MWS-25	Monitoring well Brite™ sensor, 25'

Note: This sensor communicates with the console using 3 wires.

# TSP-HLS Level Sensor

The TSP-HLS level sensor is an overfill prevention switch which is compatible with all Tank Sentinel® and fuel management system consoles. This sensor is also compatible with S940 Sensor Alarm Console. It may be adjusted to operate over a wide range of levels. The TSP-HLS is based on float-switch technology and is made of chemical-resistant materials to assure compatibility with most liquids. Each sensor is supplied with jacketed cable five feet in length. The TSP-HLS's normally closed output circuit provides supervised operation, ensuring that broken wires and similar failures will not go undetected.

The TSP-HLS is installed in a 2" NPT fitting on the tank. The level at which it operates may be adjusted by loosening a fitting and moving the sensor's shaft in or out of the tank as required.



Model	Description
TSP-HLS-15	High product level sensor, 15" long, installed in tank
TSP-HLS-15/SS	High product level sensor, stainless steel 15" long, installed in tanks containing alternative fuels
TSP-HLS-30	High product level sensor, 30" long, installed in tank
TSP-HLS-30/SS	High product level sensor, stainless steel 30" long, installed in tanks containing alternative fuels

Note: This sensor communicates with the console using 2 wires.

## Application

Overfill protection switch.

## Theory of Operation

The secret to the TSP-HLS's reliability is its float switch technology. A small magnetically-activated reed switch is located inside the body of the sensor. Tiny magnets are positioned inside a lightweight float which is free to move up and down along the shaft so that the magnets are below the reed switch. When the sensor is immersed in liquid, the float rises and the magnet activates the reed switch, signaling the console that the high limit has been reached.

### Advantages

- Supplied with a cord grip and butt splices for wiring connections.
- Easily installs into a two-inch riser pipe with a compression fit against the walls of the pipe.
- Provided with security holes that fit a padlock to prevent unauthorized access into the riser pipe.

## TSP-K12 Interstitial Sensor Riser Cap Installation Kit

Installation kit for installing the TSP-DIS, TSP-EIS or TSP-ULS in dry interstitial spaces with 2" riser pipe openings.



Model	Description
TSP-K12	Interstitial sensor riser cap kit for 2" riser pipes

### Advantages

- The riser cap is compression fit into a 4" riser pipe via the use of a lever.
- Supplied with a cord grip and butt splices for wiring connections.
- Provided with security holes that fit a padlock to prevent unauthorized access into the riser pipe.

## TSP-KV4 Hydrostatic Sensor Vented Riser Cap Installation Kit

Replacement vented installation kit for use with the TSP-HIS or TSP-HIS XL sensor installed in a 4" reservoir opening on double wall fiberglass tanks. One TSP-KV4 is already included with each TSP-HIS or TSP-HIS-XL.



Model	Description
TSP-KV4	Hydrostatic sensor vented riser cap kit for 4" riser pipes

# TSP-KW4 Interstitial/Monitoring Well Pipe Cap Installation Kit

Installation kit for installing sensors in a dry tank interstitial or monitoring well with a 4" riser.



## Advantages

- The interstitial/monitoring well cap is compression-fit into the riser pipe via the use of a lever.
- Supplied with a cord grip and butt splices for wiring connections.
- Provided with security holes that fit a padlock to prevent unauthorized access into the riser pipe.

Model	Description
TSP-KW4	Interstitial/monitoring well pipe cap kit for 4" riser pipes



### Advantages

- Easily customized to fit virtually any sump by cutting the Uni-Strut<sup>®</sup> assembly to desired length.
- Provided with 2", 3" and 4" pipe clamps for mounting to sump piping.
- Sensor location easily adjusted by the unique sliding feature of the Uni-Strut<sup>®</sup> assembly.

## Sensor Installation Accessories

### Uni-Strut<sup>®</sup> Mounting Kit

Installation kit for installing the TSP-DDS and TSP-DTS in sump space.

Model	Description
TSP-KS	Uni-Strut <sup>®</sup> mounting kit for TSP-DDS and TSP-DTS sensors

### Sensor Installation Accessories

Part Number	Description
TSP-DB1	One direct burial splice connector kit
TSP-DB10	Pack of 10 direct burial splice connector kits
TSP-DBTOOL	Epoxy dispensing tool
TSP-KW30	Pack of 30 3M splice connectors

- Notes: 1. Use the TSP-DB1 or TSP-DB10 for direct burial cable applications or when weatherproof junction boxes are not used.
2. The DBTOOL is required to dispense the epoxy.
3. Each direct burial splice connector kit includes a receptacle, three splice connectors and epoxy for the dispensing tool.

# TS-RA1 Remote Audible and Visible Alarm Unit

The TS-RA1 is a remote audible and visible alarm unit for use with Franklin Fueling Systems Automatic Tank Gauges.. The unit may be used as an overfill alarm as required by federal, state and local regulations, or as a general purpose remote alarm annunciator.



## Advantages

- Pulsating light and piezoelectric buzzer warn of alarm conditions.
- Can be combined with TS-RK remote acknowledge unit to provide choice of alarm silencing options.
- Can be programmed through Franklin Fueling Systems Automatic Tank Gauges to activate in response to any type of alarm in the system.
- Alarms for overfill and general purpose.

## Installation

- Install within 1000 feet of console.
- Wiring: Type THHN, TFFN or THWN, 18 AWG or larger installed in conduits and completely separated from probe and sensor circuits.
- Operates directly from 110 VAC line power.
- For use in indoor/outdoor applications that have low background noise.

Model	Description
TS-RA1	Standard intensity, tank overfill alarm with light and horn
TS-RK	Remote tank overfill alarm acknowledge unit

### Advantages

- Pulsating light and electromechanical buzzer warn of alarm conditions.
- Ideal for outdoor applications where a high intensity alarm is necessary.
- Can be combined with TS-RK remote acknowledge schemes.
- Has adjustable sound level with useful range of over 200 feet.

### Installation

- Install within 1000 feet of console.
- Wiring: Type THHN, TFFN or THWN, 18 AWG or larger installed in conduits and completely separated from probe and sensor circuits.
- Operates directly from 110 VAC line power.
- For use in indoor/outdoor applications that have high background noise.

## TS-RA2 Remote Audible and Visible Alarm Unit

The TS-RA2 is a high intensity remote audible and visible alarm unit for use with Franklin Fueling Systems Automatic Tank Gauges.. The unit may be used as an overfill alarm as required by federal, state and local regulations, or as a general purpose remote alarm annunciator.



Model	Description
TS-RA2	High intensity, tank overfill alarm with light and horn
TS-RK	Remote tank overfill alarm acknowledge unit

# TS-RK Remote Alarm Acknowledge Unit

The TS-RK is a remote alarm acknowledge unit for use with all Franklin Fueling Systems Automatic Tank Gauges equipped with remote alarm annunciators.



## Advantages

- Locks or silences audible and visible alarms up to 1000 feet.
- Facilitates rapid response during emergencies in either indoor or outdoor locations.
- Can be combined with TS-RA1 or TS-RA2 remote alarm units to provide a choice of alarm silencing options.
- Housed in rugged, nonmetallic NEMA 4X unit ideal for any weather condition.

## Installation

- Install within 1000 feet of console.
- Wiring: Type THHN, TFFN or THWN, 18 AWG or larger installed in conduits and completely separated from probe and sensor circuits.
- In conjunction with TS-RA1 or TS-RA2 and operates directly from 110 VAC line power.

Model	Description
TS-RK	Remote tank overfill alarm acknowledge unit



### Advantages

- Easy to use and install.
- Compatible with most manufacturer's dispensers.
- Gathers all relevant dispensing information.
- Allows remote reconciliation.

## TS-DIM Dispenser Interface Module

INCON's Tank Sentinel<sup>®</sup> console and TS-DIM together offer the ultimate solution for automating the inventory reconciliation process. Available as an internal module on fuel management system consoles, not available on the TS-750 or Colibri.



### Specifications

- Power: 110 VAC 20 Watts.
- Size: 8-1/2" x 7-1/2" x 2".
- Environment: 35 °F to 120 °F, 10-90 non-condensing humidity.
- Electrical: 115 VAC 60 Hz, 20 Watts, dedicated circuit with earth ground.

### Applications

- INCON's dispenser interface module (TS-DIM) connects to the manufacturer's dispenser distribution box to collect dispensing data. The Tank Sentinel<sup>®</sup> console gathers all relevant dispensing information.
- Collects information from the dispenser via the distribution box.
  - Eliminates the need to manually read dispenser meters and stick tanks to reconcile inventory.
  - Provides everything required to automate the reconciliation process.
  - Directly connects to the Tank Sentinel<sup>®</sup> console via a 3-wire RS 485 protocol interface to all major dispenser manufacturers including Tokheim, Gilbarco, Dresser Wayne and Schlumberger.
  - Available on fuel management system consoles where dispenser configuration require a second DIM.



### Capabilities

The TS-DIM collects information on all dispensed product and consolidates the data to a concise, easy-to-read format, facilitating the inventory reconciliation process.


- Allows the ATG console to gather all relevant dispensing information.
- Calculates the quantity of product dispensed from each fueling point.
- Monitors up to 64 fueling points.
- Tracks the exact amount of product dispensed even during fuel deliveries.
- Reliable operation and complete data gathering ensures accurate dispenser readings.

Model	Description
TS-DIM/G	Dispenser interface module/Gilbarco dispensers
TS-DIM/GS	Dispenser interface module/G-site controller
TS-DIM/M	Dispenser interface module/Mechanical dispensers
TS-DIM/S	Dispenser interface module/Schlumberger dispensers
TS-DIM/T	Dispenser interface module/Tokheim dispensers
TS-DIM/W	Dispenser interface module/Wayne dispensers

Note: Not available with the TS-750 or Colibri consoles.



TS-DIM Installation

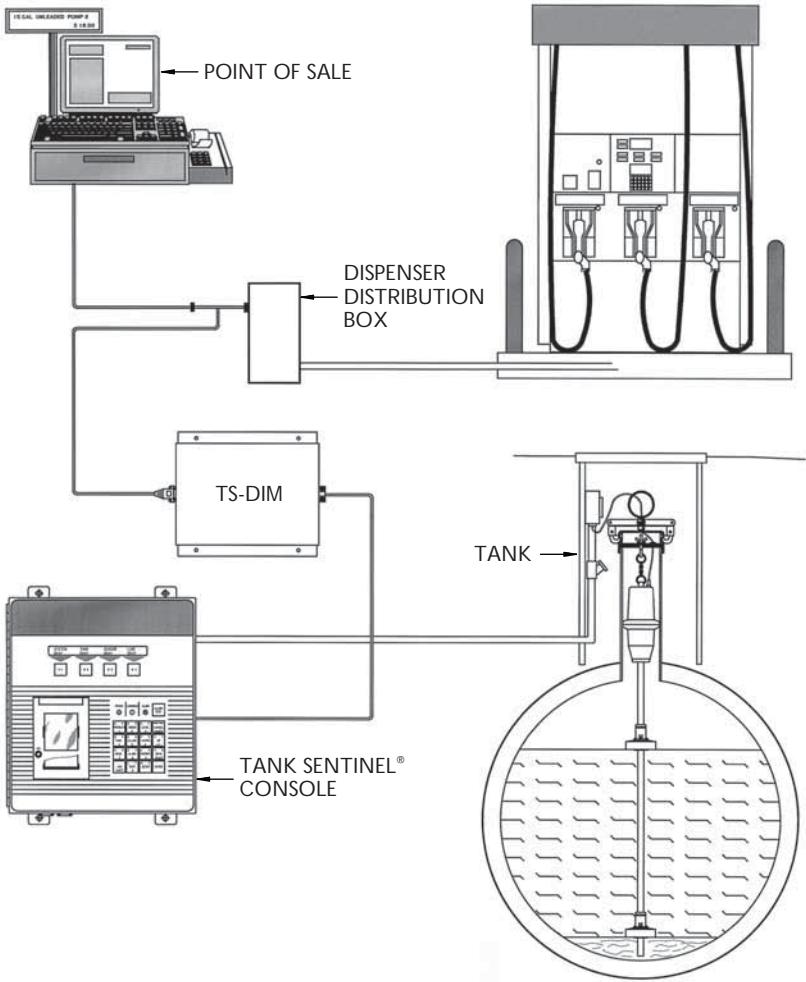

## Advantages

- In dual storage tank installations where two submersibles are used for one product grade with a single line, the ATG will always start the pump in the tank with the highest product level.
- INCON ATG can be programmed to respond to faults in the submersible pumping system.
- Automatic reset of the dry running fault in the submersible pump controller.
- Disables the submersible pump in the event of high water levels.
- Remote monitoring of the entire fueling system.
- Communication of pump diagnostic faults to remote monitoring party.
- Standalone TS-TPI can be mounted in a location convenient to on-site personnel.
- In one product grade dual tank installations with two submersible pumps discharging into a single discharge line, the second pump starts directly upon the shutdown of the first upon any shutdown fault. Within moments, the fault is reported to the monitoring party.

## TS-TPI Turbine Pump Interface

The TS-TPI turbine pump interface provides a communication link for FE Petro intelligent pump controllers to communicate faults to enabled devices. This link allows the INCON ATG to include the reporting of submersible pump conditions to a monitoring party or to the station operator. Also, by integrating the intelligence of these two systems, the ATG can keep the station pumping fuel without service calls during several events that normally would result in down time and lost fuel sales. The TS-TPI is a standard internal option on the fuel management system consoles, not available on the TS-750 or Colibri.



## System Requirements

TS-TPI integrated into TS-LS300 AutoLearn™ line leak detection console.

- INCON TS-1001 or TS-2001 ATG console with version 3.5 software or higher.
- INCON TS-LS300 line leak detection console.
- FE Petro smart controller model STP-SCI, STP-SCIII or MagVFC™.
- For remote communication capabilities, System Sentinel™ version 3.1 software or higher or System Sentinel *AnyWare*™ version 1.0 or higher.

For TS-TPI standalone option,

- INCON TS-1001 or TS-2001 ATG console with version 3.5 software or higher.
- TS-TPI module.
- FE Petro smart controller model STP-SCI, STP-SCIII or MagVFC™.
- For remote communication capabilities, System Sentinel™ version 3.1 software or higher, or System Sentinel *AnyWare*™ version 1.0 or higher.

## Configurations

- Standalone: TS-TPI turbine pump interface module.
- Included in AutoLearn™ TS-LS300: TS-TPI turbine pump interface module included in all TS-LS300 AutoLearn™ line leak detectors.

Model	Description
TS-TPI	Turbine pump interface

Note: Not available with the TS-750.



# TS-ROM2 BriteBox™ Relay Output Module

The TS-ROM2 relay output module is a BriteBox™ expansion control module which may be used with the Tank Sentinel® console to perform control functions in response to alarm conditions. Not available on TS-750, fuel management system, or Colibri consoles.



Model	Description
TS-ROM2/4	Relay output module, 4 channel SPST
TS-ROM2/8	Relay output module, 8 channel SPST
TS-KB	Installation kit

- Notes: 1. Up to four BriteBoxes™ can be connected to the console (two TS-SEMs, one TS-ROM2 and one TS-CIM1 can be connected).
2. One TS-ROM2 is typically used for positive pump shutdown when certain alarms occur.
3. Order one TS-KB install kit for each BriteBox™ (includes ribbon cable, flexible conduit and fittings).
4. Not available on TS-750, fuel management system, or Colibri consoles.

## Advantages

- Designed for use with the Tank Sentinel® console to perform key emergency functions, disable pumps, operate indicator lights, sound alarms and perform other control functions.
- Flexible configuration that energizes or de-energizes each channel's relay in response to an alarm or loss of power.
- Available in 4 and 8 channel configurations.
- Uses miniature electromechanical relays to switch external loads.
- Each TS-ROM2 output channel can switch a 3 Amp 120/240 VAC load.

## Installation

- Originally installed with Tank Sentinel® consoles, or can be added later.
- BriteBox™ mounted no further than 18" from Tank Sentinel® console.
- Wiring: ten conductor BriteBus™ ribbon cable run through ¾" flexible or rigid conduit connecting Tank Sentinel® console to BriteBox™ enclosure. TS-KB installation kit recommended.
- Wiring from the load circuits is connected to the field wiring terminal strip in the TS-ROM2.



## Theory of Operation

The TS-SEM is used in situations where the internal sensor inputs, standard with all Tank Sentinel<sup>®</sup> consoles, are not sufficient to handle the amount of sensors required for the application. The TS-SEM is used to expand the number of external console sensor inputs by increments of eight. A maximum of two TS-SEMs can be connected to one Tank Sentinel<sup>®</sup>. The sensor alarms in turn can be used to perform such tasks as turning off submersible pumps or sound alarms.

The Tank Sentinel<sup>®</sup> communicates with all BriteBox<sup>™</sup> intelligent junction expansion modules over the BriteBus<sup>™</sup> serial interface. This expansion interface uses a 10 conductor ribbon cable to connect the Tank Sentinel<sup>®</sup> to the TS-SEM. The console automatically recognizes the BriteBox<sup>™</sup> when connected and activates sensor control software features in the system. A heartbeat LED is provided in the TS-SEM that indicates the TS-SEM and Tank Sentinel<sup>®</sup> are communicating with each other.

## Installation

- The TS-SEM is mounted in a convenient location no further than 18" from the Tank Sentinel<sup>®</sup> console. The BriteBus<sup>™</sup> ribbon cable runs through a 3/4" flexible or rigid conduit to connect the console to the BriteBox<sup>™</sup> enclosure.
- Alternatively, an optional TS-KB installation kit is recommended to simplify this connection. Sensor wiring is connected to the field wiring terminal strip in the TS-SEM. Each TS-SEM can handle up to eight INCON standard or BriteSensor<sup>™</sup> sensors.

# TS-SEM BriteBox<sup>™</sup> Sensor Expansion Module

The TS-SEM is a sophisticated BriteBox<sup>™</sup> sensor expansion module that works exclusively with Tank Sentinel<sup>®</sup> and leak detection consoles. This allows the Tank Sentinel<sup>®</sup> to expand its total number of sensor inputs by increments of eight. The TS-SEM is supplied with an 18" ribbon cable used to connect it to the console. All sensor field wiring terminals are provided within the BriteBox<sup>™</sup> and appropriately labeled to simplify installation. Not available on TS-750, fuel management system, or Colibri consoles.



Model	Description
TS-SEM	Sensor expansion module
TS-KB	Installation kit

- Notes: 1. Up to four BriteBoxes<sup>™</sup> can be connected to the console (two TS-SEMs, one TS-ROM and one TS-CIM1 can be connected).
2. One or two BriteBoxes<sup>™</sup> can expand the total number of leak detection sensors in the system by another eight or sixteen sensors (I.S. inputs).
3. Order one TS-KB install kit for each BriteBox<sup>™</sup> (includes ribbon cable, flexible conduit and fittings).
4. Not available on TS-750, fuel management system, or Colibri consoles.

# TS-M Modem

The TS-M high-speed modem for remote communication with the Tank Sentinel® console.



Model	Description
TS-M	Modem
TS-MLS	Multi-port telephone line switching device

## Advantages

- Features originate or auto-answer capabilities as well as pulse and touch-tone dialing.
- Pre-configured for use with all Tank Sentinel® products.
- TS-M complies with the Bell 103 standard at 300 Baud, the Bell 212A standard at 1200 Baud and the V.22 bis standard at 2400 Baud.
- Operates with any other modem meeting these standards.
- Preset dip switches ensure proper operation after a power loss.

## TS-M Kit Includes

- Modem.
- Power adapter.
- Telephone cord with RJ11 connectors.
- M/F 25 pin/socket connector, RS232 communications cable.
- DB25 female to DB9 female adapter.

## TS-EPS Ethernet Port Server

The TS-EPS is a serial to Ethernet converter that allows Tank Sentinel<sup>®</sup> consoles to be assigned an IP address.



Model	Description
TS-EPS	Ethernet port enabling device for Tank Sentinel <sup>®</sup> consoles
TS-EPS-N	Ethernet port enabling device with null modem cable for other ATG systems. Not required with fuel management system or Colibri consoles.

Note: The Ethernet port device allows remote access to tank gauge console through an Ethernet IP address.

## External Console Hardware Accessory


### Waterproof Enclosure

(not available on fuel management system consoles)

Part Number	Description
TS-NEMA4X	NEMA 4 waterproof enclosure

# System Sentinel™ Remote Fuel Management Software

System Sentinel™ is a powerful, versatile and easy-to-use remote fuel management software that can communicate with all major tank gauge brands.

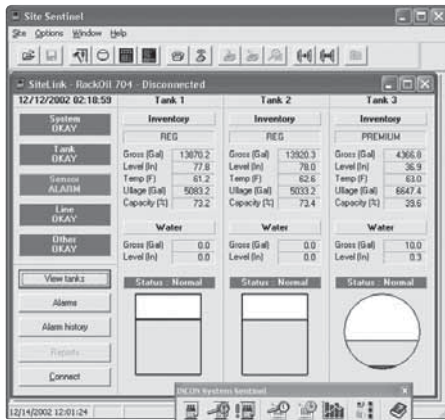

Group Name: Monthly Reconciliation Report February 2002

Actual Site Name: MS (Unknown)

Gross Volume Units: Gallons

Transaction	Opening Vol	Adjusted	Sales	Adjusted	Book Vol	Closing Vol	Variance
20010002 6:00a	6202.8	0.0	802.0		5079.8	5083.6	3.8
20020002 6:00a	5083.6	0.0	609.9		5073.7	5086.9	13.2
20030002 6:00a	5086.9	0.0	484.3		4582.6	4584.1	1.5
20040002 6:00a	4584.1	0.0	362.2		4221.9	4234.3	2.5
20050002 6:00a	4234.3	0.0	431.2		3803.1	3810.3	7.2
20060002 6:00a	3810.3	0.0	605.8		3204.4	3212.7	8.2
20070002 6:00a	3212.7	0.0	607.6		2605.1	2604.6	-0.5
20080002 6:00a	2604.6	0.0	575.4		2029.2	2031.1	1.9
20090002 6:00a	2031.1	7791.2	839.7		8972.6	8979.1	6.5
20100002 6:00a			507.2		8465.4	8465.2	-0.2
Monthly Totals			15286.2		17947.9		1345.5
	Variance	1345.5	Adjusted	-1345.5	Status	OK	

( 1 ) 30080002 3009

## Advantages

- Broad communication capabilities via modem, local or wide area networks, satellites, DSL, cable or other high-speed internet-based methods.
- Gathers specified data in a user-defined polling schedule or in real-time.
- Provides summarized or detailed information about all fueling sites.
- Deliveries are forecast from current inventory usage rates.
- Collects dispensing data to allow real-time reconciliation of sales data.
- Provides centralized control of all compliance information such as tank and line leak testing data and leak detection sensor status.
- A wide variety of reports can be custom-scheduled, displayed and printed or faxed at specific times.
- Displays data, highlights trouble spots and facilitates management by exception.
- Supports an unlimited number of sites.
- Offers immediate notification of alarms for corrective action.

## Specifications

- Microsoft Windows: 2000 or XP Professional editions, or Windows NT 2.0 or Windows 98.
- Pentium class processor: 33 MHz minimum.
- Minimum of 50 MB available hard drive space.
- Minimum of 32 MB RAM, 64 MB RAM with Windows XP.
- Display setting of 800 × 600 pixels with small font setting.
- Modem, Ethernet or serial connection.

## Applications

With its easy-to-use report interface, System Sentinel™ allows you to spend more time managing your business. System Sentinel™ generates a wide variety of reports that can be customized to meet your business needs. The report formats are easy to read and allow you to extract relevant data quickly and easily for intelligent decision making. Some available reports are:

- Alarm history.
- Delivery.
- Leak test detail.
- Tank test detail.
- Detail and summary inventory.
- Monthly, daily and shift reconciliation.
- Alarm status.
- Average daily usage.
- Cathodic protection.
- Regulatory with sensor status.


## Capabilities

- Allows remote access to all fueling sites 24 hours a day.
- Inventory can be monitored as needed to precisely schedule deliveries.
- Monthly reconciliation and reconciliation summary reports allow for adjustments in delivery or sales volume data.
- Can monitor and report effectiveness of cathodic anti-corrosion devices.
- Communicates with all major tank gauge brands, no need to replace existing tank gauges.



## System Sentinel™ Interactive Tool Bar

System Sentinel™'s interactive tool bar lets you access your site data with a click of the mouse. Each of the icons represents an important module of System Sentinel™.

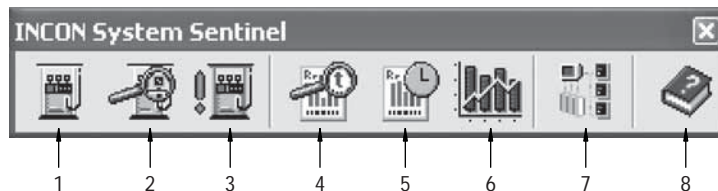


Number	Module	Description
1	Site Sentinel	Allows you to set-up and store the programming of tank gauges at your sites
2	Site Watch	Enables and assigns the polling function
3	Site Alert	Monitors your sites and notifies you when any alarms occur
4	Report Sentinel	Queries the database and organizes the information into user-selected reports or data format
5	Report Scheduler	Allows you to schedule reports to be displayed, printed or faxed at predefined times
6	Site Director	Provides a single-screen view of the alarm status up to 25 sites simultaneously, as well as product usage, delivery forecasts and regulatory compliance status for management by exception
7	Database Administrator	Allows you to archive and/or purge the data in your database
8	Help	Provides online assistance when using the software

## System Sentinel™ Tech Edition

A cost effective version of System Sentinel that includes all the programming and diagnostic interface features used by technicians. (Site Sentinel, Report Sentinel, Database Administrator)

# System Sentinel *AnyWare*™ Internet Enabled Fuel Management Software


System Sentinel *AnyWare*™ is an internet based fuel management package designed to provide you with unparalleled monitoring and control capabilities. Residing on a local server in your home office, System Sentinel *AnyWare*™ will allow your personnel to access site information through any web browser.

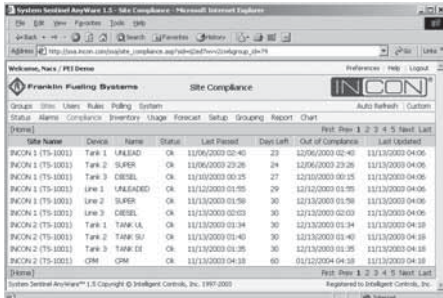

System Sentinel AnyWare 1.5 - Site Compliance - Microsoft Internet Explorer

Franklin Fueling Systems Site Compliance


Site Name	Device	Name	Status	Last Picked	Days Left	Out of Compliance	Last Updated
INCON 1 (TS-1001)	Tank 1	UNLEAD	OK	11/09/2003 02:40	23	12/06/2003 02:40	11/13/2003 04:06
INCON 1 (TS-1001)	Tank 2	SUPER	OK	11/09/2003 23:26	24	12/06/2003 23:26	11/13/2003 04:06
INCON 1 (TS-1001)	Tank 3	DIESEL	OK	11/09/2003 00:25	27	12/06/2003 00:25	11/13/2003 04:06
INCON 1 (TS-1001)	Line 1	UNLEADED	OK	11/13/2003 01:55	29	12/13/2003 01:55	11/13/2003 04:06
INCON 1 (TS-1001)	Line 2	SUPER	OK	11/13/2003 01:56	30	12/13/2003 01:56	11/13/2003 04:06
INCON 1 (TS-1001)	Line 3	DIESEL	OK	11/13/2003 02:03	30	12/13/2003 02:03	11/13/2003 04:06
INCON 2 (TS-1001)	Tank 1	TANK 1A	OK	11/13/2003 01:34	30	12/13/2003 01:34	11/13/2003 04:06
INCON 2 (TS-1001)	Tank 2	TANK 1U	OK	11/13/2003 01:40	30	12/13/2003 01:40	11/13/2003 04:06
INCON 2 (TS-1001)	Tank 3	TANK 1E	OK	11/13/2003 01:35	30	12/13/2003 01:35	11/13/2003 04:06
INCON 2 (TS-1001)	CRM	CRM	OK	01/11/2004 04:38	60	01/11/2004 04:38	11/13/2003 04:06

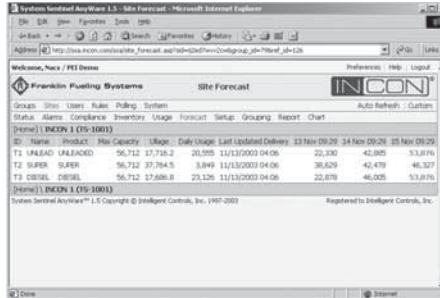

System Sentinel AnyWare 1.5 - Site Forecast - Microsoft Internet Explorer

Franklin Fueling Systems Site Forecast


ID	Name	Product	New Capacity	Usage	Daily Usage	Last Updated	Delivery	11 Nov 20:20	24 Nov 09:20	25 Nov 09:20
T1	UNLEAD	UNLEADED	56,712	17,716.2	20,595	11/13/2003 04:06	22,330	42,885	53,816	
T2	SUPER	SUPER	56,712	37,764.5	3,849	11/13/2003 04:06	36,629	42,479	46,327	
T3	DIESEL	DIESEL	56,712	17,888.8	23,126	11/13/2003 04:06	22,879	46,025	53,816	

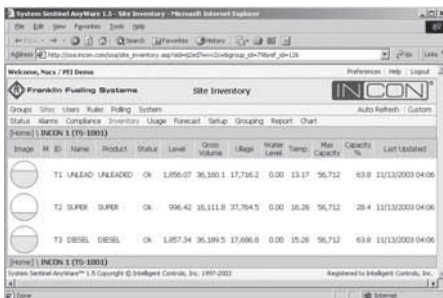

System Sentinel AnyWare 1.5 - Site Inventory - Microsoft Internet Explorer

Franklin Fueling Systems Site Inventory

Image	ID	Name	Product	Status	Level	Gross Volume	Usage	Water Level	Temp	Max Capacity	Last Updated
	T1	UNLEAD	UNLEADED	OK	1,896.07	36,380.1	17,716.2	0.00	13.17	56,712	63.8 11/13/2003 04:06
	T2	SUPER	SUPER	OK	996.42	16,111.8	37,764.5	0.00	16.26	56,712	28.4 11/13/2003 04:06
	T3	DIESEL	DIESEL	OK	1,857.34	36,389.5	17,888.8	0.00	15.26	56,712	63.8 11/13/2003 04:06

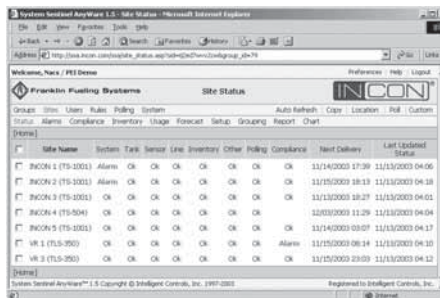

System Sentinel AnyWare 1.5 - Site Status - Microsoft Internet Explorer

Franklin Fueling Systems Site Status

Site Name	System	Tank	Sensor	Line	Inventory	Other	Polling	Compliance	Next Delivery	Last Updated
INCON 1 (TS-1001)	Alarms	OK	OK	OK	OK	OK	OK	OK	11/14/2003 17:39	11/13/2003 04:06
INCON 2 (TS-1001)	Alarms	OK	OK	OK	OK	OK	OK	OK	11/15/2003 18:13	11/13/2003 04:06
INCON 3 (TS-1001)	Alarms	OK	OK	OK	OK	OK	OK	OK	11/13/2003 18:27	11/13/2003 04:01
INCON 4 (TS-1004)	OK	OK	OK	OK	OK	OK	OK	OK	11/03/2003 11:29	11/13/2003 04:04
INCON 5 (TS-1001)	OK	OK	OK	OK	OK	OK	OK	OK	11/14/2003 09:07	11/13/2003 04:17
VR 1 (TS-1001)	OK	OK	OK	OK	OK	OK	OK	Alarms	11/15/2003 08:14	11/13/2003 04:10
VR 2 (TS-1001)	OK	OK	OK	OK	OK	OK	OK	OK	11/15/2003 23:09	11/13/2003 04:12

## Advantages

- Broad communication capabilities via modem, local or wide area networks, satellites, DSL, cable or other high-speed internet-based methods.
- Gathers specified data in a user-defined polling schedule or in real-time.
- Inventory can be monitored as needed to precisely schedule deliveries.
- Deliveries are forecast from current inventory usage rates.
- Provides centralized control of all compliance information such as tank and line leak testing data and leak detection sensor status.
- Access to information can be controlled for multiple users.
- A wide variety of reports can be custom-scheduled, displayed and printed or faxed at specific times.
- Communicates with all major tank gauge brands.
- Supports an unlimited number of sites.
- Offers immediate notification of alarms for corrective action.

## Specifications

- Server:  
Microsoft Windows server operating system.  
933 MHz Pentium III with 512 MB of physical memory.  
100 MB for the application and 500 MB to 1 GB for the database disk space.  
Second processor will boost performance significantly.
- Third Party application:  
Microsoft Internet Server (IIS) web server.  
Microsoft SQL server.  
Seagate Crystal Reports server.

## Capabilities

- The powerful rules engine of the System Sentinel *AnyWare*™ allows you to manage by exception by automatically forwarding alarm, leak test and inventory information to the appropriate people when immediate attention is required.
- Capable of communicating to an unlimited number of sites using your WAN (wide area network) or a bank of multiple modems. System Sentinel *AnyWare*™ will quickly collect your site information and get it to you to help you run your business.



## Advantages

- E-mails or text messages are immediately sent upon receipt of an alarm notification from the console to help lower service costs, provide less downtime and help have a higher throughput.
- Automatically and reliably retrieves fuel management and compliance data from all sites to eliminate reporting errors, lost printouts and keep all data in one place. This frees up site personnel for other tasks.
- Hardware and software is maintained by FFS so there is no need to purchase, install or maintain a server to monitor your sites.
- Secure access to site data from anywhere so you can view data with immediate accuracy from your home, office or the road.
- Daily usage and delivery forecast tools help to accurately schedule fuel drops and eliminate running out.
- A wide variety of reports and date range options help generate various compliance, alarm and inventory reports.
- Centralized, secure compliance information makes all your sites accessible in minutes.

## Get Connected *AnyWare*<sup>™</sup> Remote Polling Service

Get Connected *AnyWare*<sup>™</sup> is a remote polling service from Franklin Fueling Systems that allows customers internet access to their sites from any web browser. Get Connected *AnyWare*<sup>™</sup> acts as an application service provider of our powerful System Sentinel *AnyWare*<sup>™</sup> software, allowing customers access to the application running on our servers at the Get Connected Data Center. Through high speed Ethernet or modem dial-up communications, Get Connected *AnyWare*<sup>™</sup> can communicate with ATGs and retrieve important fuel management, alarm and compliance data.

Site can be accessed at [www.gcanyware.com](http://www.gcanyware.com). Log in using the user demo and password demo.

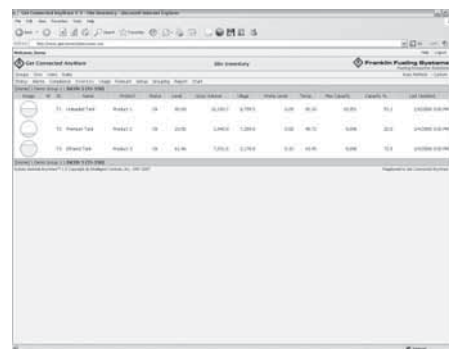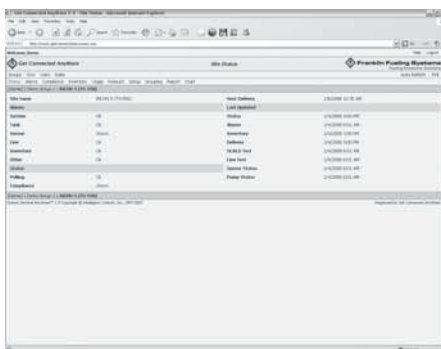

### Polling Options

One poll	AM, All history poll
Two polls	PM, Alarms, inventory and latest delivery
Three polls	Late PM, Alarms, inventory and latest delivery
On-demand	Customer directed polling any time

## Get Connected *AnyWare*™ Remote Polling Service

### Monthly Fee Schedule per Site

ATG Type	INCON/EBW		Veeder-Root/Gilbarco	
Connection type	Modem	High speed	Modem	High speed
Up to three polls daily	\$30.00	\$20.00	\$40.00	\$30.00
Data export service	\$50/month per customer			
Data archive service	\$250 one time fee			

### Limited Time Incentive

Customers who use all Franklin Fueling System products at a new site will receive two years of Get Connected *AnyWare*™ service for that site at no cost. Customers who replace a competitive ATG system with an INCON TS-5 Series console will receive two years of the Get Connected *AnyWare*™ service for that site at no cost.

### Polling Service Details

Get Connected *AnyWare*™ hosts the server, the application (System Sentinel *AnyWare*™) and provides internet access to it. Online training and phone/e-mail support are available. Other details include:

- Ability to browse to the Get Connected *AnyWare*™ Web site from home, office, on the road or anywhere you have internet access.
- Customers can monitor their own sites and respond to alarms, compliance issues and perform fuel management.
- Rules can be created to send out e-mails and text messages on alarms and other events.
- All sites will be polled at least once daily and more frequent polling options are available.
- Get Connected *AnyWare*™ consists of an auto-renewing six month agreement that can be discontinued at any time with a 30-day notice.



## Receiving for High Speed Connections

Customers with an Ethernet connection can program their ATGs to contact Get Connected *AnyWare*<sup>™</sup> on various alarms or events. Get Connected *AnyWare*<sup>™</sup> will receive these transmissions and poll the site for new data. The new data will be applied to the current rules and e-mails will be generated if applicable.

## Support While Getting Connected

Franklin Fueling Systems will provide support in bringing online and troubleshooting communication with sites using Franklin Fueling Systems communications equipment. This includes the TS-EPS Ethernet port server, the TS-MLS multi-line phone switch and the TS-FM2 internal modem.

## Site Survey

If requested, Franklin Fueling Systems will recommend a distributor or service company in the customer's area to perform site surveys of the sites they wish to bring online.

## More Functions

Get Connected *AnyWare*<sup>™</sup> will support connectivity to the following ATGs:

- INCON TS-5 Series (TS-5, TS-550, TS-5000, TS-EMS).
- INCON TS-1001 Series (TS-1001, TS-2001, TS-504, TS-508, TS-750).
- EBW Autostik (Bulkstik and Autostik Jr. version 3.905 or greater).
- Veeder-Root TLS-300, 350 and Gilbarco EMC Automatic Tank Gauges.

Connection can be established via Ethernet or internal modem. The Get Connected *AnyWare*<sup>™</sup> data center will store two years worth of data for each site and allow you to export your data. Data older than two years can be accessed with the data archive service.

# Sump Test System Kit

The TS-STs sump test system is designed specifically to test dispenser and turbine containment sumps for leaks. Up to four sumps can be leak-tested simultaneously with accurate compliance test results available in just 15 minutes. The system consists of two carrying cases containing a TS-STs console and quick start guide in one, and leak test probes, cables and printer paper in the other.



## Advantages

- Designed to deliver cost-effective environmental compliance test data.
- Easily transported in two supplied carrying cases.
- Easily set-up and programmed with site-specific data and sump identification before a test. Site and test data can also be saved to a laptop database.
- Laptop interface optional using System Sentinel™ Tech Software.
- Accommodates up to four probes for testing of up to four dispensers or four turbine containment sumps simultaneously.
- Uses INCON's magnetostrictive probe technology for unparalleled accuracy and reliable results.
- Highly accurate leak test detects level changes greater than 0.002 inches during the fifteen minute test.
- Provides accurate test solution levels for each sump monitored.
- Automatically prints out passed and/or failed sump leak test reports in just fifteen minutes after starting a leak test. Printer included.
- Shows the date and time of the test, test-solution levels and the leak test results on sump leak test reports.
- Additional sump leak test reports can also be printed at the console before other tests are completed.



## TS-STs Sump Test System Quick Start Guide

Pg 1

### TS-STs Overview – New Version 2.0 !

The TS-STs system includes a TS-STs console within a convenient portable case, 4 leak testing probes with 50 feet of dual-connector cable, and probe hanging hardware (slip rings and chain).

After all fittings within the sump are sealed, the sump is filled with a water-based test solution that covers all sump penetration holes. The probe is installed so the float is floating on the surface of the test solution. The TS-STs console is quickly programmed with the site name and address, number of sumps, the 7-digit code-names for each sump, and the correct Time/Day/Date before leak testing.

Pressing the Test key at the console keypad starts sump leak tests for all sumps. The test time is 15 minutes and tests for a level change greater than 0.002 inches. If the level of a sump drops more than the leak limit during the test, the Sump Leak Test Report will show a fail result when the test is finished. Leak tests can also be programmed (scheduled) to start at desired times.

When finished, leak test reports will automatically print out at the console printer. Extra copies of this report can be printed using the report key. A newly completed Sump Leak Test will overwrite the previous results stored in memory. Save sump leak test reports and provide copies as evidence of compliance with regulations.

**NOTE:** INCON recommends to leak-test the turbine sumps together and then to test dispenser sumps in groups (leaving some dispensers in service).

INCON P/N 001-0004 Rev B Feb 01 2002 © Intelligent Controls, Inc. 2001 2002 [www.incon.com](http://www.incon.com)  
The price of this change without prior notice. INCON is a registered trademark of Intelligent Controls, Inc.

### 1 TS-STs Installation

#### 1. Required Materials:

- a.) Tape to secure the probe cable (to reduce tripping hazard and movement of the probe during the 15 minute leak test)
  - b.) Safety cones and appropriate sign(s)
  - c.) Grounded, three pronged extension cord(s)
  - d.) Flat pieces of metal to suspend leak testing probe over sumps
- 2.) Work safely, install Safety Cones and Signs at the site for protection
  - 3.) Install the probes as shown per diagrams in Section 1
  - 4.) Connect the yellow probe cables to the receptacles at the probes and at the TS-STs case. Locate the TS-STs case outside of the Hazardous Area and tape the cable down to prevent probe movement during the test and to reduce tripping hazards.
  - 5.) Setup / Program the TS-STs Console per Section 2
  - 6.) Start sump leak test(s) on sumps that are ready

**NOTE:**  
ES-

Using a computer is recommended to record site data, and sump code-names. Test results can also be extracted from Conn Part 1 at the bottom of the TS-STs console (See Section 4).

Reference Federal and State regulations for leak test and test time requirements. Recommendations for location of the TS-STs console, outside of the (Class I, Division 1, Group D) Hazardous Areas during testing, are based on NFPA 30, NFPA 30A and NFPA 70 (NEC).

FRANKLIN FUELING SYSTEMS  
3760 MARSH ROAD  
MADISON, WI 53718, USA  
1-800-225-9787

10/31/2001 12:15 PM

### SUMP LEAK TEST REPORT


#### SUMP 1

TEST STARTED	12:00 PM
TEST STARTED	10/31/01
BEGIN LEVEL	2.0120 IN
END TIME	12:15 PM
END DATE	10/31/01
END LEVEL	2.0120 IN
LEAK THRESHOLD	0.002 IN
TEST RESULT:	PASSED

## Specifications

- Operating temperature:  
Console - 32° to 122 °F  
(0° to 50 °C).  
Leak test probes - -40° to 140 °F  
(-40° to 60 °C).
- Storage temperature:  
Console - -4° to 140 °F  
(-20° to 60° C).  
Leak test probes - -40° to 158 °F  
(-40° to 70 °C).
- Intrinsic safety rating:  
Leak test probes - Class 1, Div. 1,  
Group D.
- Carry case weight and dimensions:  
Console - 33 lbs. (15 kg), 24" × 19" ×  
8½" (62 cm × 49 cm × 22 cm).  
Leak test probes - 30 lbs. (13.5 kg),  
38" × 18" × 6" (97 cm × 45 cm × 16 cm).
- Number of sumps monitored:  
Console - 4.  
Leak test probes - 1.
- Applicable liquids:  
Leak test probes - testing solution.
- Level units:  
Console - inches.
- Display type and size:  
Console - alphanumeric LCD,  
2 lines of 40 characters.
- Printer type:  
Console - 24 column thermal printer.
- Power requirements:  
Console - 115 VAC, 50 Watts,  
6' power cord with 3 prong  
plug supplied.  
Leak test probes - 50' cable supplied.

Model	Description
TS-ST5-2K	Sump test system with two probes
TS-ST5-3K	Sump test system with three probes
TS-ST5-4K	Sump test system with four probes

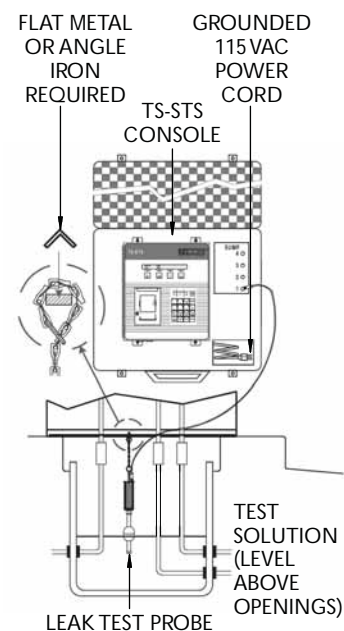



## TS-5, TS-550, TS-5000 and TS-EMS Consoles

Part Number	Description
TSSP-CM	Spare controller module, fuel management system application only, no software options
TSSP-CM/EMS	Spare controller module for TS-EMS, vapor recovery monitoring application only
TSSP-CM/R	Replacement controller module, factory programmed with required options
TSA-CMUPG	Upgrade kit for TSSP-CM in stock to add original options
TSSP-10ARLY	Spare 6 output 10 amp relay module
TSSP-2WSNS	Spare 12 input 2-wire sensor module
TSSP-3WSNS	Spare 8 input 3-wire sensor module
TSSP-420IB	Spare 8 input 4-20ma module
TSSP-420EXP	Spare 8 input EXP 4-20ma module
TSSP-ACI	Spare 12 input AC input module
TSSP-IO	Spare input output module
TSSP-PRB	Spare 12 input probe module
TSSP-RLY	Spare 8 output relay module
TSP-ENCD	Replacement encoder for TS-VFM
TSSP-IFB5	TS-5 interface board
TSSP-IFB5X	TS-550, TS-5000 and TS-EMS interface board
TSSP-IPPTR	Impact printer assembly
TSSP-LCD	LCD display
TSSP-PS	Power supply module
TSSP-SP5FUSE	Spare Fuse Kit
TSSP-T5MB	TS-5 motherboard
TSSP-T550MB	TS-550 and TS-EMS motherboard
TSSP-T5000MB	TS-5000 motherboard
TSSP-TRMBLK	Package of 10 assorted terminal blocks

Note: The serial number of the old CM must be provided when ordering the TSSP-CM/R. Provide the serial number of the old and new CM when ordering the TSA-CMUPG.

## TS-504 and TS-750 Consoles

Part Number	Description
TSSP-BAT	3 Volt lithium battery
TSSP-DSP1	Keypad/display PC board
TSSP-DSPKC1	Display/keypad cable
TSSP-ENCLK	Enclosure lock and key
TSSP-MSB4	Main system PC board, 110 VAC
TSSP-PSTB4	Probe sensor terminal board
TSSP-PSTB4-SM	Surface mount probe/sensor terminal board, serial numbers 100000 and higher
TSSP-PTR	Printer assembly
TSSP-PTRC1	Printer cable
TSSP-SMSB4	Surface mount system PC board, 110 VAC, serial numbers 100000 and higher
TSSP-SPFUSE	Spare fuse kit
TSSP-SVKT4-SM	TS-504 and TS-750 service kit for surface mount boards*
VSSP-MSB4	Main system PC board, 220 VAC
VSSP-SMSB4	Surface mount system PC board, 220 VAC, serial numbers 100000 and higher

TSSP-SVKT4-SM includes one of the following: TSSP-SMSB4, TSSP-DSP1, TSSP-PSTB4-SM, TSSP-PTR, TSSP-PTRC1, TSSP-DSPKC1, TSSP-SPFUSE, TSSP-ENCLK and TSSP-BAT.

## TS-508 Console

Part Number	Description
TSSP-BAT	3 Volt lithium battery
TSSP-DSP1	Keypad/display PC board
TSSP-DSPKC1	Display/keypad cable
TSSP-ENCLK	Enclosure lock and key
TSSP-MSB8	Main system PC board, 110 VAC
TSSP-PSTB8	Probe sensor terminal board
TSSP-PSTB8-SM	Surface mount probe/sensor terminal board, serial numbers 100000 and higher
TSSP-PTR	Printer assembly
TSSP-PTRC1	Printer cable
TSSP-SMSB8	Surface mount system PC board, 110 VAC, serial numbers 100000 and higher
TSSP-SPFUSE	Spare fuse kit
TSSP-SVKT8-SM	TS-508 service kit for surface mount boards*
VSSP-MSB8	Main system PC board, 220 VAC
VSSP-SMSB8	Surface mount system PC board, 220 VAC, serial numbers 100000 and higher

TSSP-SVKT8-SM includes one of the following: TSSP-SMSB8, TSSP-DSP1, TSSP-PSTB8-SM, TSSP-PTR, TSSP-PTRC1, TSSP-DSPKC1, TSSP-SPFUSE, TSSP-ENCLK and TSSP-BAT.



## TS-1001 Console

Part Number	Description
TSSP-BAT	3 Volt lithium battery
TSSP-DSP1	Keypad/display PC board
TSSP-DSPKC1	Display/keypad cable
TSSP-ENCLK	Enclosure lock and key
TSSP-MSB1	Main system PC board, 110 VAC
TSSP-PSTB1	Probe sensor terminal board
TSSP-PSTB1-SM	Surface mount probe/sensor terminal board, serial numbers 100000 and higher
TSSP-PTR	Printer assembly
TSSP-PTRC1	Printer cable
TSSP-SMSB4	Surface mount system PC board, 110 VAC, serial numbers 100000 and higher
TSSP-SPFUSE	Spare fuse kit
TSSP-SVKT1-SM	TS-1001 service kit for surface mount boards
TSSP-T1KEY	Replacement key
VSSP-MSB1	Main system PC board, 220 VAC
VSSP-SMSB4	Surface mount system PC board, 220 VAC, serial numbers 100000 and higher

\*TSSP-SVKT1-SM includes one of the following: TSSP-SMSB4, TSSP-DSP1, TSSP-PSTB1-SM, TSSP-PTR, TSSP-PTRC1, TSSP-DSPKC1, TSSP-SPFUSE, TSSP-ENCLK and TSSP-BAT.

## TS-2001 Console

Part Number	Description
TSSP-BAT	3 Volt lithium battery
TSSP-DSP2	Keypad/display PC board
TSSP-DSPKC2	Display/keypad cable
TSSP-ENCLK	Enclosure lock and key
TSSP-MSB2	Main system PC board, 110 VAC
TSSP-PSTB2	Probe sensor terminal board
TSSP-PSTB2-SM	Surface mount probe/sensor terminal board, serial numbers 100000 and higher
TSSP-PTR	Printer assembly
TSSP-PTRC2	Printer cable
TSSP-SMSB8	Surface mount system PC board, 110 VAC, serial numbers 100000 and higher
TSSP-SPFUSE	Spare fuse kit
TSSP-SVKT2-SM	TS-2001 service kit for surface mount boards*
VSSP-MSB2	Main system PC board, 220 VAC
VSSP-SMSB4	Surface mount system PC board, 220 VAC, serial numbers 100000 and higher

\*TSSP-SVKT2-SM includes one of the following: TSSP-SMSB8, TSSP-DSP2, TSSP-PSTB2-SM, TSSP-PTR, TSSP-PTRC2, TSSP-DSPKC2, TSSP-SPFUSE, TSSP-ENCLK and TSSP-BAT.

## TS-LLD

Part Number	Description
010-0072	Control unit terminal interface board
020-1503	Hardware kit
430-0010	0.5 Amp fuse
TS-CU	Control unit
TS-FC	Line filter capacitor
TS-FPU	Face plate unit
TS-LSU	Leak sensor unit

## TS-LS300

Part Number	Description
600-0080	Transducer quick disconnect cable
TS-ALCAL	3.0 gph calibration kit
TS-ALFUSE	AutoLearn™ fuse kit
TS-AFALNIP	Alternative fuels needle valve kit
TS-ALNIP	Needle valve kit
TS-LSU300	Intrinsically safe pressure transducer
TS-LSU300E	Explosion proof pressure transducer
TSSP-ALDB2	2-line display board
TSSP-ALDB4	4-line display board
TSSP-ALMB2	2-line intrinsically safe main board, 110 VAC
TSSP-ALMB2E	2-line explosion proof main board, 110 VAC
TSSP-ALMB4	4-line intrinsically safe main board 110 VAC
TSSP-ALMB4E	4-line explosion proof main board 110 VAC
TSSP-ALPTRC	Ribbon cable, display board to main board
TSSP-ALTPI	TPI turbine pump interface board
VSSP-ALMB2	2-line I/S main board, 220 VAC
VSSP-ALMB4	4-line I/S main board, 220 VAC

## TS-LS500

Part Number	Description
600-0080	Transducer quick disconnect cable
TS-ALCAL	3.0 gph calibration kit
TS-AFALNIP	Alternative fuels needle valve kit
TS-ALNIP	Needle and valve kit
TS-LSU500	Intrinsically safe 4-20 mA pressure transducer
TS-LSU500E	Explosion proof 4-20 mA pressure transducer

## TS-ST5 Sump Test Kit

Part Number	Description
282-0027	Chain, including split ring
282-0058	Split ring
600-0200	Probe cable 50'
TS-PRB-1	12" leak test probe kit*
TS-TP2	One box of 5 rolls of thermal printer paper
TSP-SSP	Stainless steel probe float
STS-CASE	STS probe case
STS-PRB-12	12" leak test probe
STS-REPAIR	STS system repair

Note: For parts for the TS-ST5 unit itself, reference the TS-1001 parts list. Repair price includes labor and return shipping only.

\*Probe kit includes probe, float, chain and cable.

## Accessories

Part Number	Description
430-0033	3 amp fuse for TS-ROM2/4 or /8





Distributed by:



FFS-0060 01-10



**Franklin Fueling Systems**

3760 Marsh Road • Madison, Wisconsin 53718, USA

Tel: +1 608 838 8786 • Fax: +1 608 838 6433

Tel: USA & Canada 1 800 225 9787

Tel: México 001 800 738 7610

[www.franklinfueling.com](http://www.franklinfueling.com)