

labeled “CELLULAR PHONE”.

- 4.2.4 An external antenna adapter is required (sold separately) to connect the AMPLIFIER to the cellphone. External antenna adapters connect directly to the antenna extension cable.
- 4.2.5 Connect the DC power supply to the AMPLIFIER. Verify that both the OUTSIDE ANTENNA and the ADAPTER EXTENSION CABLE are connected before powering up the AMPLIFIER.

NOTE: Visit our website at www.wilsonelectronics.com for the latest adapter cross reference chart. If your phone’s adapter is not available from your retailer contact us at 1-866-294-6996 and we will help you locate one in your area. For further assistance contact our technical support Toll-Free at 1-866-294-1660.

NOTE: iDEN Antennas are recommended for iDEN Amplifier 814001.

5. AMPLIFIER SPECIFICATIONS

DIRECT CONNECTION AMPLIFIER PHYSICAL SPECIFICATIONS


Connectors	FME-Male 50 Ohms
Dimensions	5.5x4.3x1.4 (inch) or 14.0x10.8x3.5 (cm)
Weight	1.32 Pounds or 600G

iDEN #814001 AMPLIFIER SPECIFICATIONS

Frequency	806-821MHz Uplink 851-866MHz Downlink
Gain (up/down)	Cell Site Controlled-Max 10/10db
Flatness (up/down)	(+/- 2dB / +/-3dB)
Max RF (up/down)	(+35dBm/+15dBm)
Noise Figure (down)	(3.5dB nominal)
Isolation	Uplink/Downlink 90dB
Power Consumption	1.5A@12V

6. OPTIONAL ACCESSORIES/ANTENNA OPTIONS

- 6.1 Coax Cable Extensions 50Ω (see chart on pg.7)
- 6.2 Antenna Options (see chart on last page)
- 6.3 N-Female To FME-Female Adapter - Adapts 9913 Coax to the **814001** Bi-directional Amplifier.
- 6.4 Lightning Suppressor (In-Building application)
WARNING: Lightning protection is recommended for all In-Building installations.
- 6.5 Hardwire Power Supply Kit.

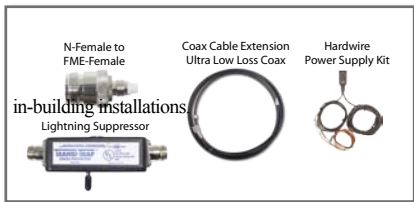

7. WARNINGS

WARNING: Verify that both the outside antenna and adapter extension cable are connected before powering up the AMPLIFIER.

RF SAFETY WARNING: (MOBILE ONLY) The outside antenna must be mounted with a separation distance of at least 15.5 inches from any of the vehicle occupants or nearby persons and must not be co-located or operating in conjunction with any other antenna or amplifier. Use of a cellular amplifier with antenna gains higher than 5.12dBi is in violation of FCC regulations for which the offender is fully liable. All Wilson Mobile Antennas are 5.12dBi or less.

WARNING: (IN-BUILDING ONLY) Lightning protection is recommended for all in-building installations.

RF SAFETY WARNING: (IN-BUILDING ONLY) When using in-building, the outside antenna must be fixed-mounted on an outdoor permanent structure with a separation of at least 20 feet from all persons during normal operation.

8. TECH SUPPORT

If you need further assistance with your installation:

- 1) Call us Toll-Free at 866-294-1660
- 2) E-mail tech support at tech@wilsonelectronics.com
- 3) Go to www.wilsonelectronics.com

Our Hours of Operation are: 8:00 AM – 4:30 PM (Mountain Time)

EXTENSION CABLE CHART (RG 58 - FME connectors / 9913 - N connectors)


951101	5' Extension Cable RG 58 Low Loss Coax	(0.6 db loss)
951102	10' Extension Cable RG 58 Low Loss Coax	(1.2 db loss)
951103	15' Extension Cable RG 58 Low Loss Coax	(1.8 db loss)
951104	20' Extension Cable RG 58 Low Loss Coax	(2.4 db loss) Used with the Yagi Antenna - (N-Male to FME Female)
951108	20' Extension Cable 9913 Ultra Low Loss Coax	Only use 9913 Low Loss Coax for extensions 20' or longer (0.8 db loss)
951105	30' Extension Cable 9913 Ultra Low Loss Coax	(1.2 db loss)
951106	50' Extension Cable 9913 Ultra Low Loss Coax	(2.0 db loss)
951107	100' Extension 9913 Low Loss Coax	(4.0 db loss)

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

Leaving the amplifier on in an unused vehicle for days may drain your battery. This can be avoided by plugging into an ignition switched outlet or by using the small white switch located on the power supply.

Outside Antenna Options

For more options visit
www.wilsonelectronics.com

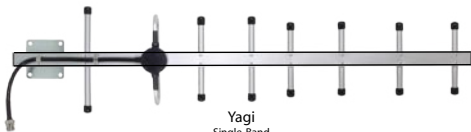

Yagi
Single-Band
(Recommended for Buildings Only)



Pictures Are Not To Scale
Not All Outside Antenna
Options Are Shown

Questions?
1-866-294-1660

www.wilsonelectronics.com



Mini Magnet
Dual-Band



Mini Glass
Dual-Band



Magnet
Mount
Dual-Band



NMO
Mount
Dual-Band



Glass
Mount
Dual-Band

Trucker
Mirror Mount
Dual-Band

15 DAY MONEY BACK GUARANTEE

All Wilson products
have a 15 day
money back
guarantee with
Proof of Purchase

1 YEAR WARRANTY

The Wilson amplifier is warranted for one year against defects in workmanship and/or materials and will be repaired or replaced, at the discretion of the manufacturer, to the original purchaser with dated proof of purchase or sales receipt.

If you have questions about your amplifier please call technical support call 1-866-294-1660 or E-mail tech@wilsonelectronics.com

Most warranty cases can be handled by taking the amplifier and the receipt to the store where it was purchased. If inconvenient, the amplifier and a copy of the receipt, may be sent to the factory, at purchasers expense, where it may be repaired or replaced and returned shipping paid. Warranty does not cover damages caused by abuse, misuse, and negligence.