

XEROX®

Quick Use Guide

WorkCentre 7655/7665/7675



701P46067
2007

Microsoft, MS-DOS, Windows, Windows NT, Microsoft Network, and Windows Server are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

Novell, NetWare, IntranetWare and NDS are registered trademarks of Novell, Inc. in the United States and other countries.

Adobe, Acrobat, PostScript, PostScript3, and PostScript Logo are trademarks of Adobe Systems Incorporated.

Apple, AppleTalk, EtherTalk, LocalTalk, Macintosh, MacOS and TrueType are trademarks of Apple Computer, Inc., registered in the U.S. and other countries.

HP, HPGL, HPGL/2, and HP-UX are registered trademarks of Hewlett-Packard Corporation.

All product/brand names are trademarks or registered trademarks of the respective holders.

The data saved in the hard disk of the machine may be lost if there is any problem in the hard disk. Xerox is not responsible for any direct and indirect damages arising from or caused by such data loss. Xerox is not responsible for any breakdown of machines due to infection of computer virus or computer hacking.

Important(1) This manual is copyrighted with all rights reserved. Under the copyright laws, this manual may not be copied or modified in whole or part, without the written consent of the publisher.(2) Parts of this manual are subject to change without prior notice.(3) We welcome any comments on ambiguities, errors, omissions, or missing pages.(4) Never attempt any procedure on the machine that is not specifically described in this manual. Unauthorized operation can cause faults or accidents.

Xerox is not liable for any problems resulting from unauthorized operation of the equipment.

An export of this product is strictly controlled in accordance with Laws concerning Foreign Exchange and Foreign Trade of Japan and/or the export control regulations of the United States.

Xerox and Ethernet are registered trademarks.

NOTE: BLUE title is for IT administrator type personnel, GREEN for end users and RED means machine needs attention. Depending on the configuration of the machine, some User Interface screens may vary.

Table of Contents

Control Panel	3
Simple Copying	5
Simple Faxing - Embedded	7
Simple Internet Faxing	9
Simple Scan to E-mail	11
Simple Network Scanning	13
Printing a configuration report	15
Usage Counters	17
Tools Overview	19
Configuring the Auditron	21
Tray Settings	23
Replacing the Toner Cartridges	25

Control Panel



1. Touch Screen
The touch screen allows you to select all the available programming features. It also displays fault clearance procedures and general machine information.

2. Job Status
Displays job progress information on the touch screen.

3. Services button
Displays the job features on the touch screen.

4. Machine Status
Displays the current status of the machine on the touch screen.

Control Panel

5. **Help**

Accesses additional online information about a specific task.

6. **Language**

Changes text to an alternative language (when available).

7. **Log In/Out**

Provides password protected access to the Setup Tools used to adjust the defaults of the machine.

8. **Clear All**

If pressed once, resets the default settings and displays the first screen for the current pathway. If pressed twice, resets all the features to their machine default settings.

9. **Interrupt**

Temporarily stops the current copy job to allow a priority job to be run.

10. **Stop**

Temporarily stops the current job. Follow the message to cancel or resume your job.

11. **Start**

Starts the job.

12. **# (Hash)**

Indicates the dialing character or designates a group dial number.

13. **Clear**


Deletes numeric values or the last digit entered.

14. **Dial Pause**

Enters a pause in a telephone number when transmitting a fax.

Simple Copying


1. Load the documents

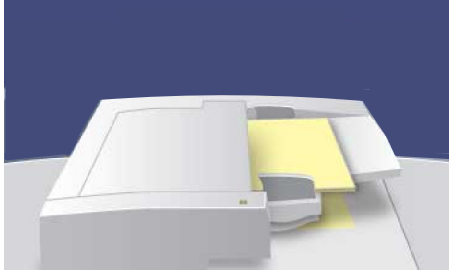

2. Press the Copy icon




3. Select the Features

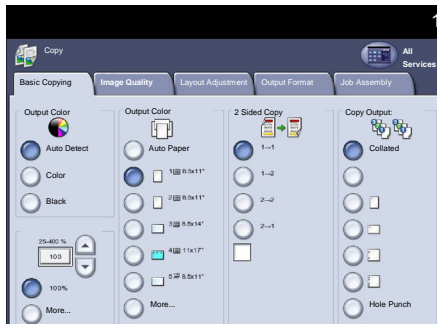


Simple Copying

4. Enter the Quantity

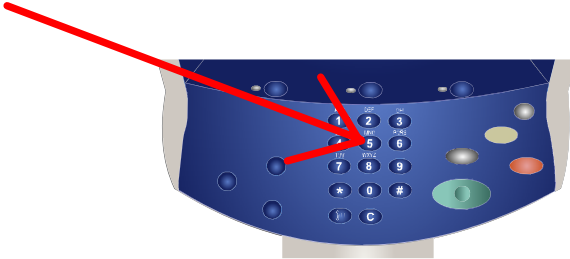

5. Press Start

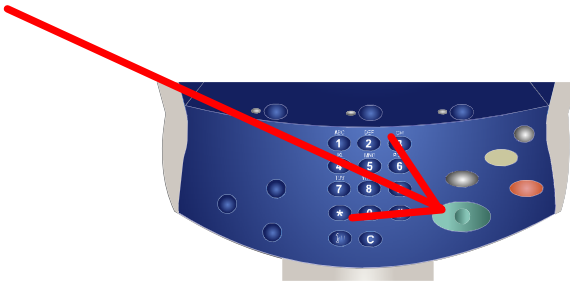


6. Identify your job in Job Status mode.

Job Status			
Active Jobs		Completed Jobs	
#			
001	CVilbone	JobStatus.doc	Printing
002	BTVu	MachineStatus.doc	Printing
003	BTVu	JobStatus.doc	Printing
004	OKern	Special.doc	Pending
005	OKern	Special.doc	Pending
006	OKern	Special.doc	Processing
007	Local User	Copy 234	Processing
008	M.Judd	E-mail 333	Scanning

Simple Faxing - Embedded


1. Load the documents

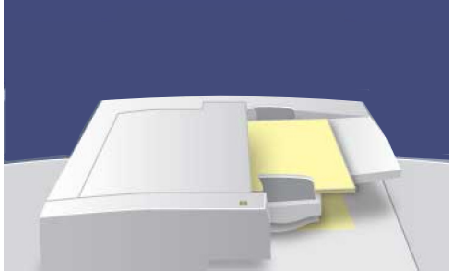

2. Press the Fax icon




3. Enter the Fax number

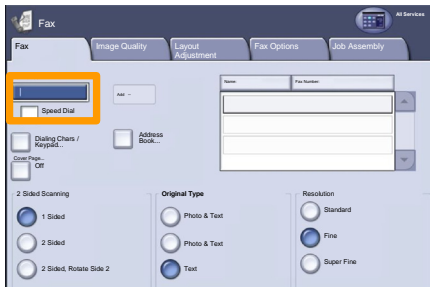


Simple Faxing - Embedded

4. Change the Settings

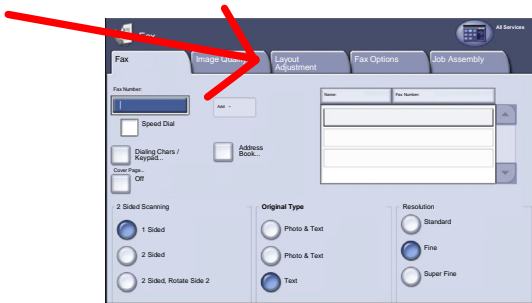

5. Press Start

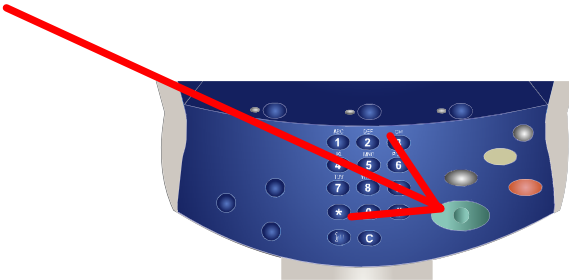


6. Identify your job in Job Status mode.


Job Status				
Active Jobs		Completed Jobs		
#				
001	CVIbone	JobStatus.doc	Printing	
002	BTVu	MachineStatus.doc	Printing	
003	BTVu	JobStatus.doc	Printing	
004	OKem	Special.doc	Pending	
005	OKem	Special.doc	Pending	
006	OKem	Special.doc	Processing	
007	Local User	Copy 234	Processing	
008	M.Judd	E-mail 333	Scanning	

Simple Internet Faxing


1. Load the documents

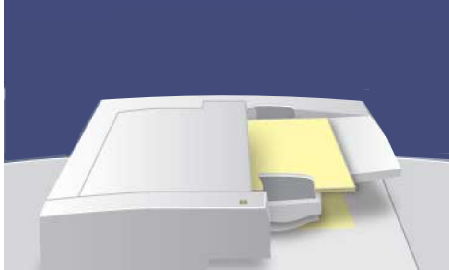

2. Touch the Internet Fax icon

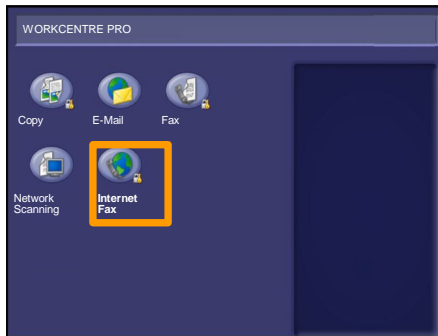


3. Enter the Recipient Details

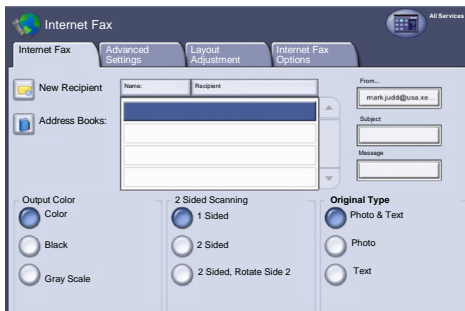


Simple Internet Faxing

4. Change the Settings

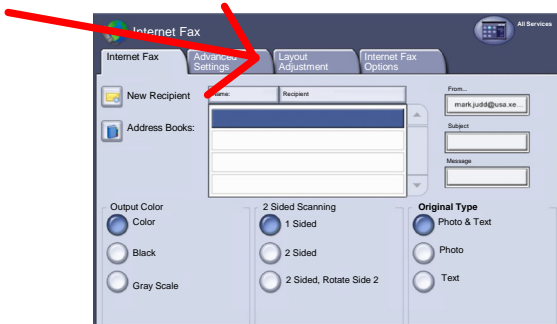

5. Press Start

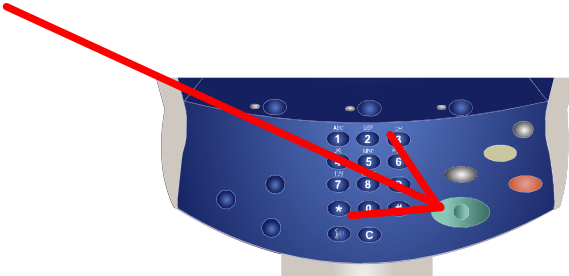


6. Identify your job in Job Status mode.


#	Job Name	File Type	Status
001	CVIbone	jobStatus.doc	Printing
002	BTVu	MachineStatus.doc	Printing
003	BTVu	jobStatus.doc	Printing
004	OKem	Special.doc	Pending
005	OKem	Special.doc	Pending
006	OKem	Special.doc	Processing
007	Local User	Copy 234	Processing
008	M.judd	E-mail 333	Scanning

Simple Scan to E-mail

1. Load the documents

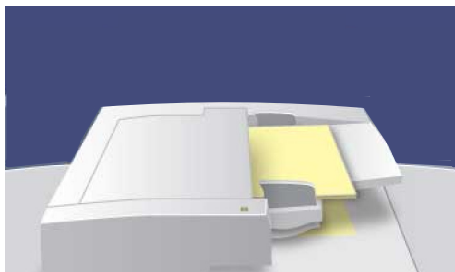

2. Touch the E-mail icon

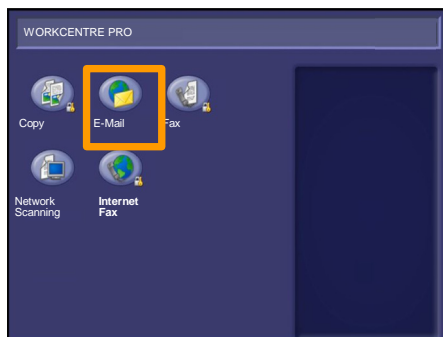


3. Enter the Recipient Details




Simple Scan to E-mail

4. Change the Settings

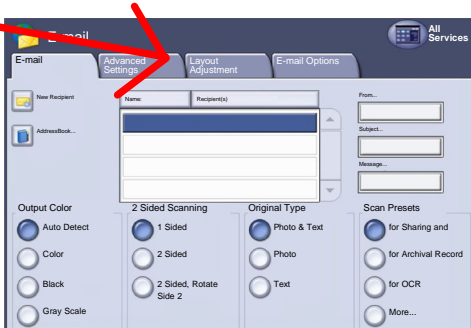

5. Press Start

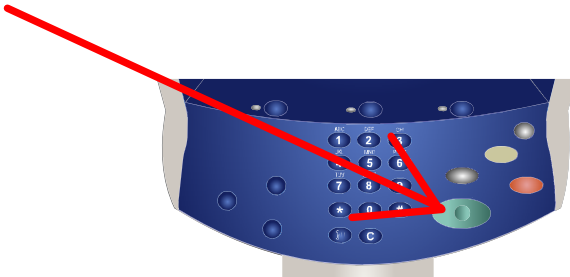


6. Identify your job in Job Status mode.




Simple Network Scanning


1. Load the documents

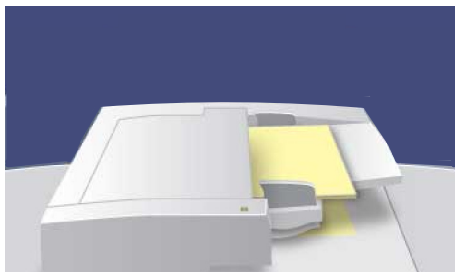

2. Press the Network Scanning icon

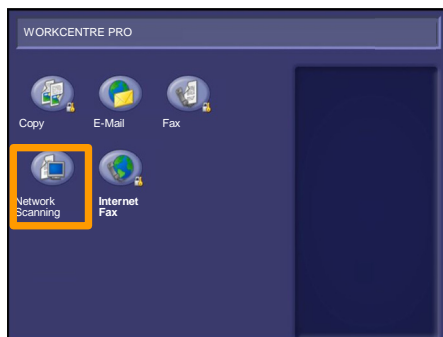


3. Select the template

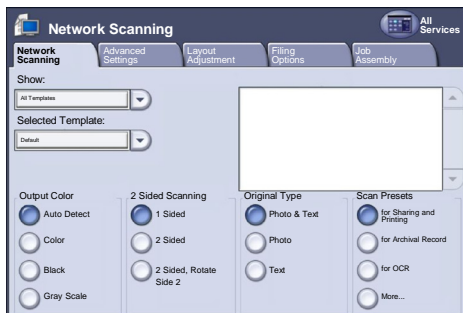


Simple Network Scanning

4. Change the Settings

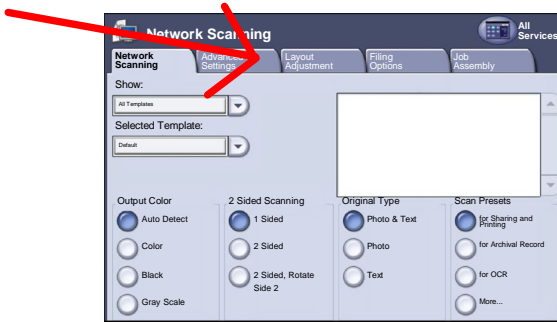

5. Press Start

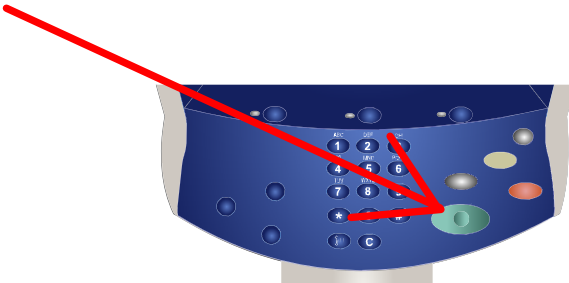


6. Identify your job in Job Status mode.




Printing a configuration report

To print a configuration report select the **Machine Status** button.

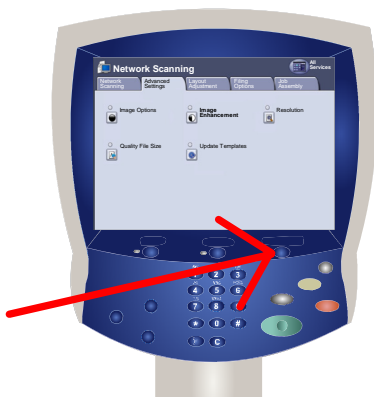


From the Machine Information tab, select the **Print Reports** button to access the type of reports you can print.

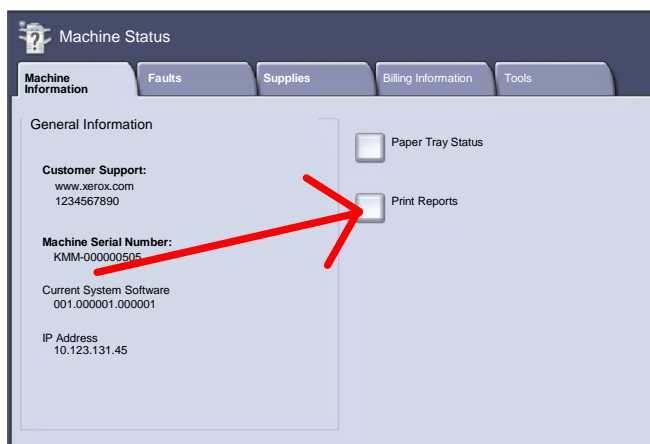

Printing a configuration report

Touch the **Configuration Report** option, then select the **Print Selected Report** button.

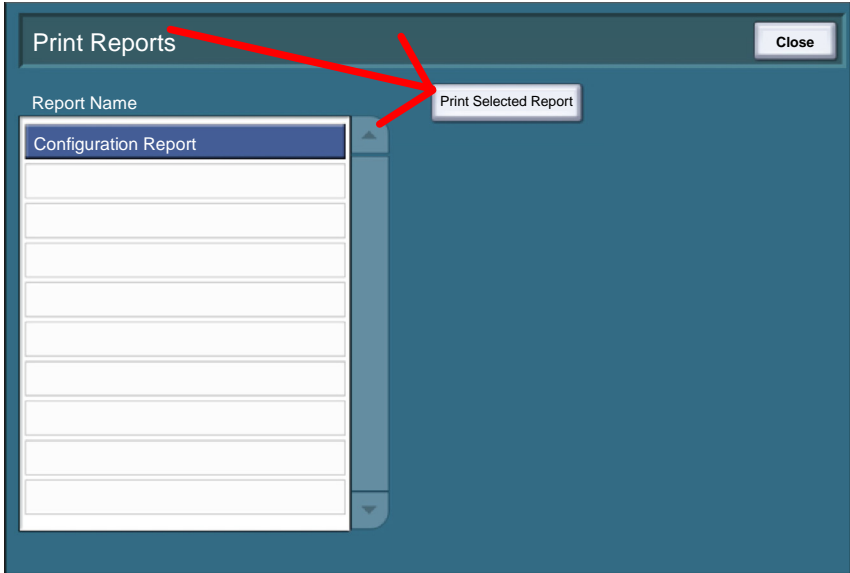

A message will confirm that the report is being printed and the report will be delivered to the output tray.


Usage Counters

Billing information can be accessed by touching the **Machine Status** button, then touching the **Billing Information** tab.

1. Machine Status




2. Billing Information

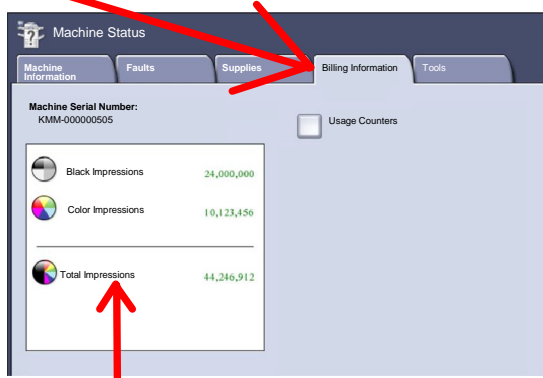


Black Impressions, Color Impressions, and Total Impressions are shown on the Billing Information Tab.

Usage Counters

The **Usage Counters** feature provides access to machine usage information. This feature is accessed by touching the **Machine Status** button, then touching the **Usage Counters** button on the **Billing Information** tab.

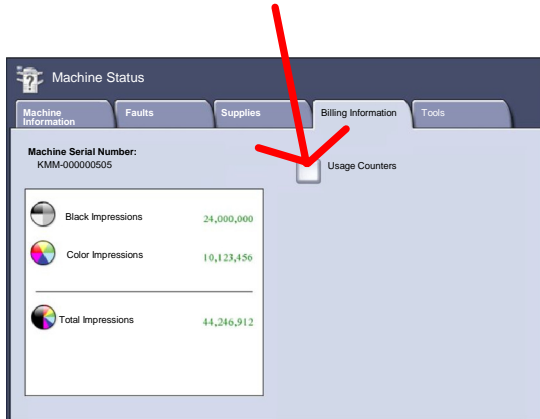


The **Total Impressions** counter is always displayed at the top of the list.

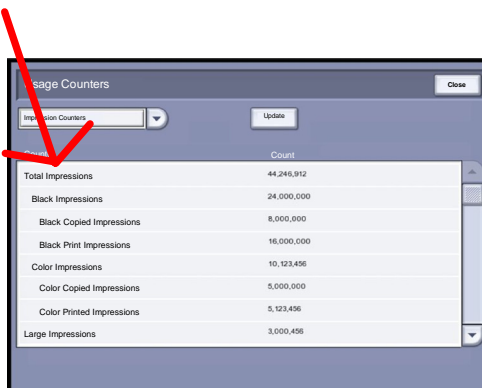

Tools Overview


Access to all of the options on the **Tools** tab (within the Machine Status window) is via the **Log In/Out** button on the control panel (highlighted on the control panel with a key symbol).

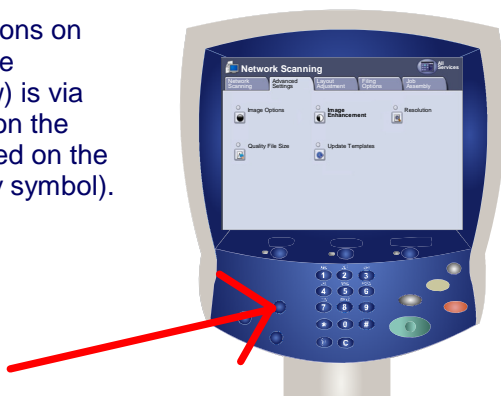


The Log In Window opens. Use the keypad to enter a 4 digit passcode in the Log In Window and then press **Enter** on the screen.

The factory preset passcode is 1111. It is strongly recommended that you change the passcode.

Refer to the System Administration CD1 for information on changing the passcode.

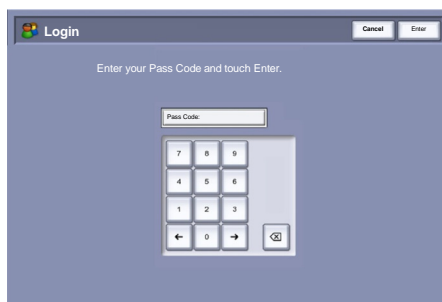

Tools Overview

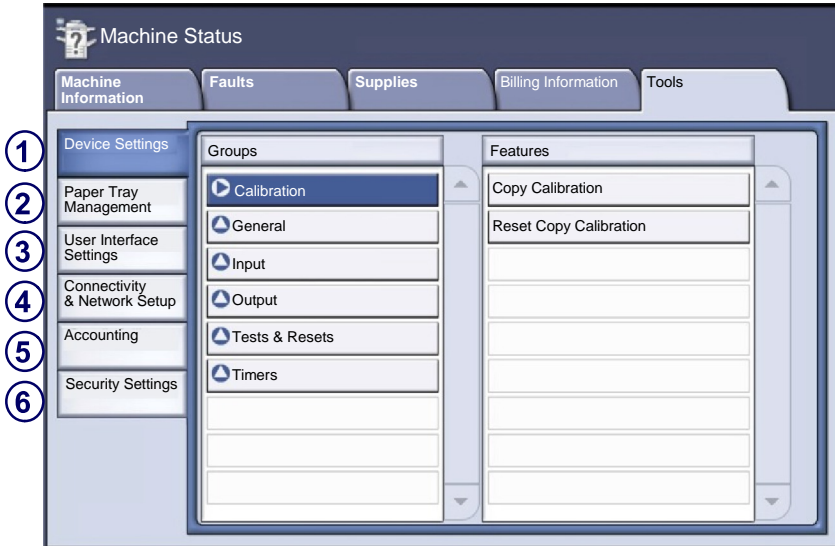

1. The **Device Settings** section includes utilities for Calibration Settings, General Settings, Input Settings, Output Settings, Test Settings, and Timer Settings.
2. The **Paper Tray Management** section includes utilities for Paper Type and Color Settings, Standard Size Required Settings, Paper Substitution Settings, Tray Settings, and Tray Contents Settings.
3. The **User Interface Settings** section includes utilities for General Settings, Common Service Settings, Copy Service Settings, Fax Service Settings, Service Enablements Settings, and Job Sheet Settings.
4. The **Connectivity and Network Setup** section includes utilities for General Settings, HTTP Settings, Reports, and TCP/IP Settings.
5. The **Accounting** section includes utilities for Accounting Mode Settings and Copy Activity Report Settings.
6. The **Security Settings** section includes utilities for Tools Access Settings, Service Access Settings, Immediate Overwrite Settings, and On Demand Overwrite Settings.

Configuring the Auditoron


The Auditoron needs to be configured before users can access the Auditoron features.

Pathway

- **Control Panel** - Press the **Log In/Out** Button.
- **Login Screen** - Input Passcode and select **Enter**.
- **Control Panel** - Press the **Machine Status** button.
- **Machine Status Screen** - Select the **Tools** tab.
- **Tools tab** - Select **Accounting**.
- **Groups Column** - Select **Accounting Enablement**.
- **Features Column** - Select **Accounting Mode**.

Selecting the **Auditoron** button, followed by the **Save** button enables the auditoron and allows you to proceed with the Auditoron setup.

The **Configure User Accounts...** option allows the Auditoron Administrator to configure all of the User Accounts and set the Accounting Priveleges for each account.

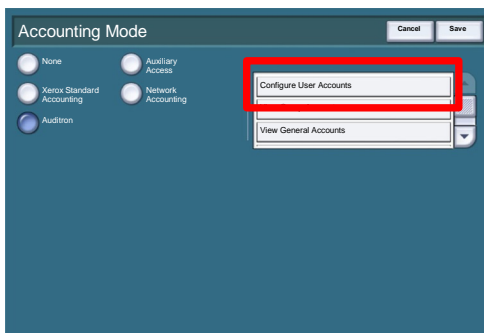


Configuring the Auditoron

The **User Account** and **Group Account** boxes display information for the currently selected User Account.

If the User Account selected is unused, the User Account field is blank and the Group Account is 1.


The User Account and Group Account are entered, or amended, by touching the required numeric display region and typing the new number on the keypad.

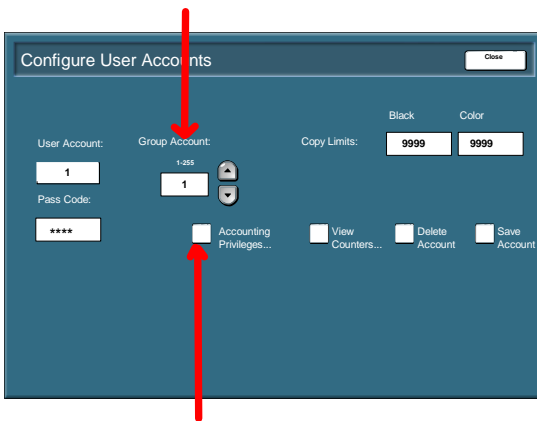

Selecting the **Accounting Privileges...** button allows the Administrator to set access levels for the account currently displayed.

The access levels available are **General Account Access**, **Multiple Group Account Access** and **Auditoron Administrator Access**.

Any combination of these access levels may be set.

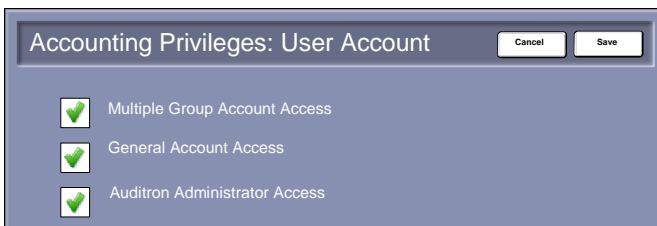


Tray Settings

Pathway


- **Control Panel** - Press the **Log In/Out** Button.
- **Login Screen** - Input Passcode and select **Enter**.
- **Control Panel** - Press the **Machine Status** button.
- **Machine Status Screen** - Select the **Tools** tab.

- **Tools tab** - Select **Paper Tray Management**.
- **Groups Column** - Select **Tray Settings**.
- **Features Column** - Select **Tray Settings**.

The Tray Settings screen shows the properties of each tray in the machine. To change the properties of a tray, touch the appropriate tray line in the list and then select the **Change Settings** button.

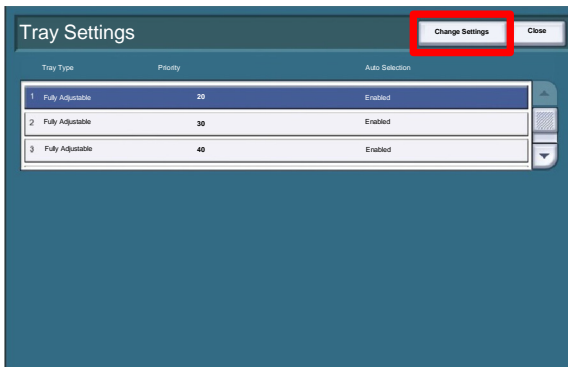

Tray Settings

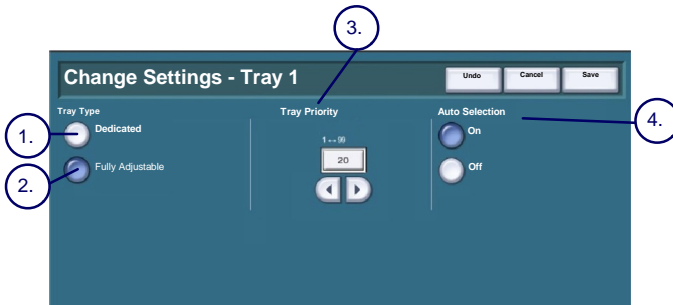

1. A **Dedicated** tray is set to contain one size and type of media. When the tray requires more media a pop-up message will appear telling the user what size and type of media to load.
2. **Fully Adjustable** allows the user to load any size and type of media, within the specified range, into the tray. The machine will detect standard sizes of paper but a pop-up screen will appear after the tray has been closed asking the user to confirm the size, type and color of the media loaded.
3. The **Priority** setting:
 - Determines which tray is used when two trays are loaded with the same paper and **Auto Paper Select** is chosen.
 - Determines which paper trays are displayed on the **Basic Copy** tab. The trays with the highest priority are displayed. 1 is the highest priority and 99 is the lowest.
4. With Auto Selection On the machine chooses which tray to feed from to best meet the users requirements.

If **Auto Paper Select** is chosen for a copy job the machine will feed paper from a tray that contains the best fit paper for the size of the image and the reduction/enlargement selected. However, auto selection only works with trays that contain the default color and type to prevent special media being used on ordinary copy jobs.


Replacing the Toner Cartridges

1. Replace the toner cartridge while the machine is on. Open the toner cover, located just above the machine front door.


CAUTION: Before you begin the procedure, ensure that the machine has been allowed to cool down. Failure to do so may result in burns if certain parts of the machine are touched.



2. Lay paper on the floor before removing the cartridge. This will allow any excess toner to fall on the paper. Hold the handle of the color indicated in the message, and gently pull it out.



3. Remove the toner cartridge by holding the handle on the top of the cartridge while gently pulling it straight out. Be careful to not get toner on clothing.



4. Dispose of the toner cartridge as normal office waste or recycle the cartridge.




Replacing the Toner Cartridges

5. Remove the new toner cartridge from its packaging.

6. Gently tilt the new cartridge up and down, and then left and right to redistribute the toner.

7. Install the toner cartridge by aligning the arrows on the cartridge evenly with the printer until you hear a click.



8. Close the Front Door. If the door will not close completely, make sure the cartridge is in the lock position and the toner cartridge is installed into the appropriate toner location.



CAUTION: Never use a vacuum cleaner when you clean spilled toner. It can cause explosion as the toner fills the vacuum cleaner and gets sparks. Use a broom or a cloth moistened with a neutral detergent.

That completes the procedure for replacing the toner cartridge.

