
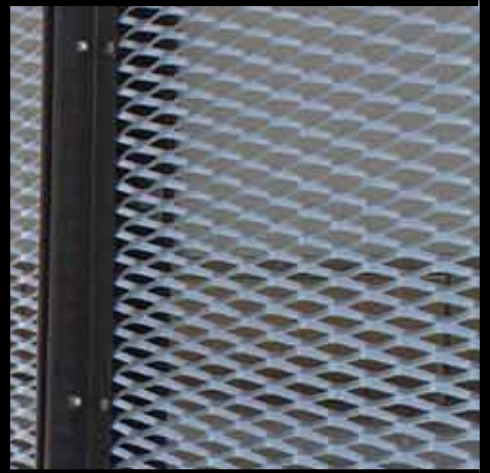


NEPEAN
Building &
Infrastructure

TM

Mastermesh® Expanded Metal

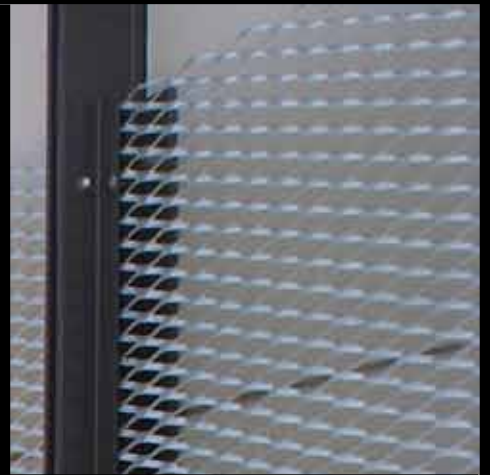

NEPEAN™ Building & Infrastructure


NEPEAN Building & Infrastructure is a division of NEPEAN, Australia's largest privately owned engineering, mining services and industrial manufacturing organisation.

Under the Mastermesh® brand, NEPEAN Building & Infrastructure manufactures and supplies an extensive range of expanded and perforated metal products that are widely used in architectural, commercial, industrial and resources projects Australia-wide. Materials include galvanised mild steel, stainless steel and aluminium.

This brochure is designed to assist the architect, draughtsperson, engineer, fabricator and specifier in the correct selection of our range of expanded metal products.

CONTENTS


Company History	2
Application Photos	3
General Information	4
Application Photos	5
Flormesh®	6-7
Small/Large Diamond	8-9
Security Mesh	10-12
Decorative Mesh	10-12
Sunscreen Mesh	10-12

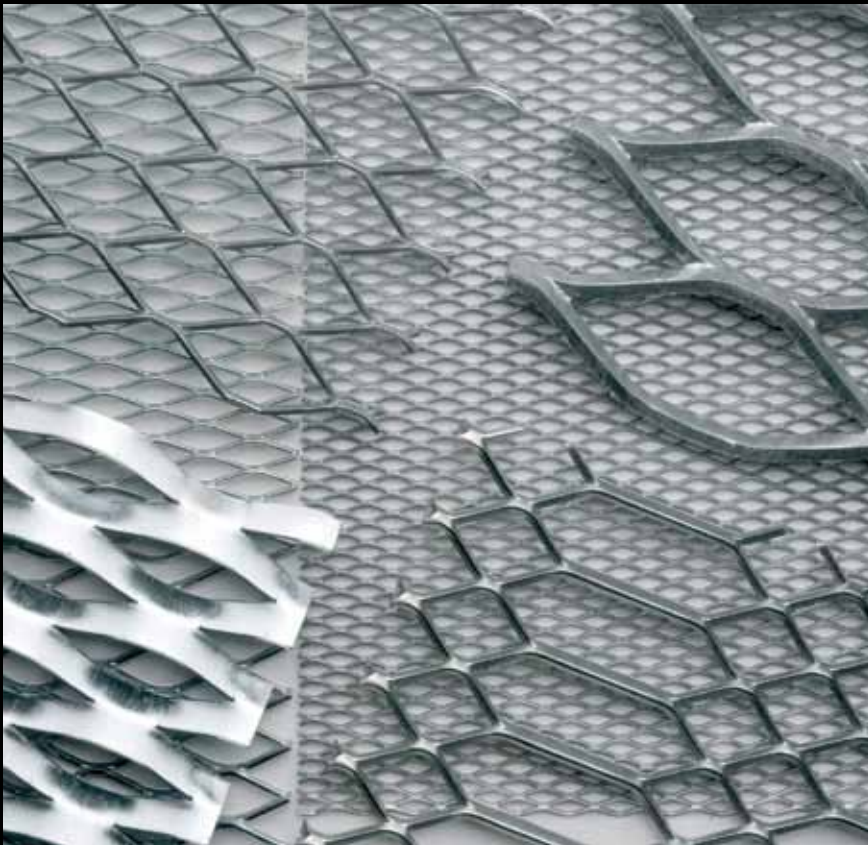

Expanded Metal



Flormesh®



Perforated Metal

MASTERMESH® EXPANDED METAL APPLICATIONS



FM14 – Walkway/Catwalks



Non-standard product – Carpark facades



SD0912 – Automotive grilles



SM3030 – Gross pollutant traps




SUN1663 – Anti-glare screens




LD3045 – Balustrade infill panels

GENERAL INFORMATION

Raised Expanded Metal Profile

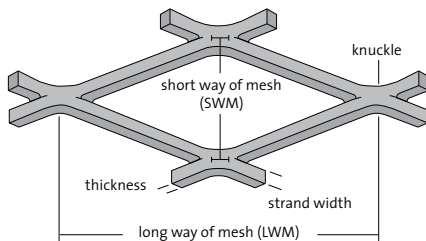

Flattened Expanded Metal Profile

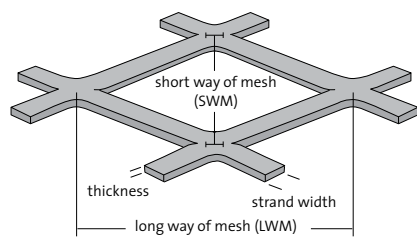

Expanded Metal Terms


LWM – Long Way Measurement. Dimension taken from the centre of one knuckle to the centre of the adjoining knuckle, measured along the “long way” of the diamond/profile (see diagrams).

SWM – Short Way Measurement. Dimension taken from the centre of one knuckle to the centre of the adjoining knuckle, measured along the “short way” of the diamond/profile (see diagrams).


Strands & Knuckles – Expanded metal is made up of strands & knuckles. Strands form the sides of the expanded metal opening and the knuckle is the intersection of two strands.

Thickness – The thickness of the parent sheet metal, which remains unchanged during the expanding process.

Sheet Direction – LWM x SWM (see diagrams below).



2400 LWM x 1200 SWM
This sheet is 2400mm LWM x 1200mm SWM



1200 LWM x 2400 SWM
This sheet is 1200mm LWM x 2400mm SWM

Materials

Expanded metal sheets can be supplied in the following materials:

- >> Untreated mild steel
- >> Pre-galvanised steel
- >> Stainless steel (304 & 316)
- >> Aluminium
- >> Copper
- >> Brass
- >> Pre-painted steel

Fabricating Expanded Metal

Conventional sheet metal working techniques are used for fabricating expanded metal, including cutting, bending and welding.

Non-standard Products

We have provided many special-purpose expanded metals to suit unique applications. If you have a requirement that is not covered in this catalogue, please contact your nearest sales office (details on back cover) for further information.



Tolerances

All measurements specified are nominal and approximates only. Although every effort is made to ensure these dimensions are accurate, they are subject to standard industrial manufacturing tolerances.

Finishes

Hot-Dip Galvanised: NEPEAN Building & Infrastructure has its own in-house galvanising plant, providing a 24-hour service. The hot-dip galvanising process produces a durable, abrasion-resistant coating of metallic zinc and zinc-iron alloy layers metallurgically bonded to the steel base. This finish is not recommended for fine meshes, as they are prone to distortion and windowing effects. Hot-dip galvanising conforms to AS/NZS4680:1999.

MASTERMESH® EXPANDED METAL APPLICATIONS



FM14 – Trailers



LD3039 – Car park facades



FM22 – Ballast retaining sump pit covers



LD3056 – Security window grilles




DM3032 – Decorative window grilles




LD1620F – Machine guards

FLORMESH® WALKWAY MESH


FM14

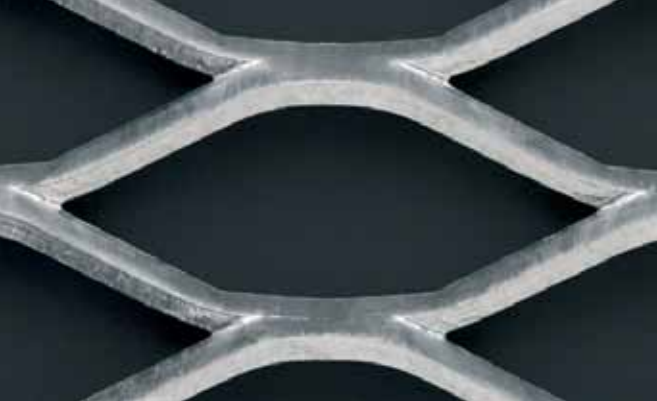

FM19

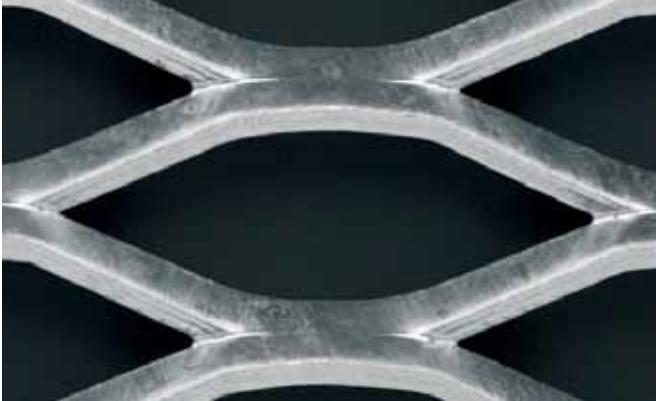

FM22

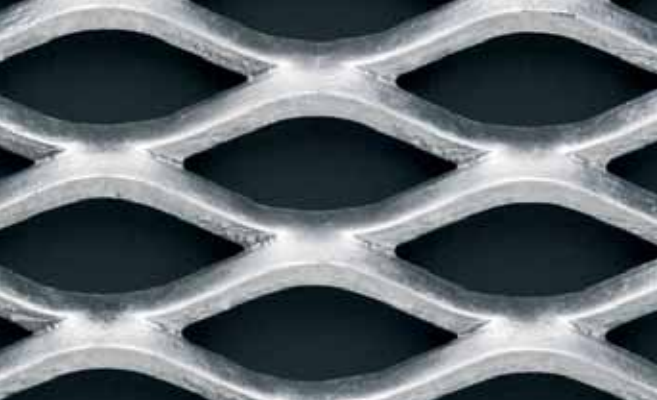

FM28



Profiles pictured are 75% actual size.



Trailers



Air conditioning platforms



Walkways

FLORMESH® WALKWAY MESH

Flormesh® Product Range

Product Code	Material	Nom. Mesh Dimensions		Nom. Strand Dimensions		Sheet Size LWM x SWM	Approx. Weight (kg/m ²)	Approx. % Open Area
		LWM (mm)	SWM (mm)	Thickness (mm)	Width (mm)			
FM14	Steel	135.00	45.00	5.00	8.00	600/750/900/1200 x 3000	14.00	64
FM19	Steel	135.00	45.00	5.00	11.00	600/750/900/1200 x 3000	19.00	52
FM22	Steel	75.00	30.00	5.00	7.50	600/750/900/1200 x 3000	22.00	50
FM28	Steel	75.00	30.00	5.00	10.50	600/750/900/1200 x 3000	28.00	30

• Open area percentages are approximations only

Flormesh® Safe Loads and Deflections

Product Code Loading Type

FM 14

Span (mm)	500	600	700	800	900	1000	1100	1200
Uniform (kPa)	18.49	13.63	10.16	7.67	5.63	4.09	2.67	1.70
Deflection (kPa)	1.24	0.97	0.78	0.64	0.52	0.44	0.37	0.31
Concentrated (kN)	1.89	1.65	1.44	1.21	0.99	0.77	0.55	0.33

FM 19

Span (mm)	500	600	700	800	900	1000	1100	1200
Uniform (kPa)	29.51	21.63	16.00	11.89	8.49	6.04	3.88	2.07
Deflection (kPa)	1.60	1.27	1.04	0.87	0.73	0.63	0.53	0.46
Concentrated (kN)	3.41	2.97	2.51	2.08	1.62	1.18	0.72	0.41

FM 22

Span (mm)	500	600	700	800	900	1000	1100	1200
Uniform (kPa)	25.50	18.54	12.32	9.69	6.81	3.63	2.61	0.94
Deflection (kPa)	1.55	1.22	0.99	0.81	0.68	0.57	0.48	0.41
Concentrated (kN)	2.41	2.16	1.92	1.67	1.46	1.18	0.88	0.70



FM 28

Span (mm)	500	600	700	800	900	1000	1100	1200
Uniform (kPa)	27.75	20.83	15.89	11.41	9.17	6.88	5.00	3.44
Deflection (kPa)	2.05	1.60	1.29	1.05	0.88	0.73	0.60	0.51
Concentrated (kN)	4.45	3.95	3.42	2.91	2.41	1.90	1.35	0.90

Notes


1. The above tables are based on the XPM Expanded Metal Industry Standard 1001.
2. Load capacities given in the table are for Flormesh® spanning the LWM direction over a clear span with every fourth strand welded to the support and a minimum landing of 25mm (preferred industry standard).
3. Uniform distributed load is the maximum load just prior to permanent deflection (yield) of mesh. Permanent yield is span/500 or 0.80mm, whichever is greater.

4. Deflections in the tables refer to uniform distributed loads causing a deflection of 10mm or span/360, whichever is less.
5. Concentrated loads were applied through a 100mm diameter plate. They correspond to a localised deflection of 10mm.
6. For large simple spans the load carrying capacity is generally governed by deflection; for double and triple spans by uniform or concentrated loads.
7. A load of 102kg approximates to 1kN. A load of 102 kg/m² approximates to 1 kPa.

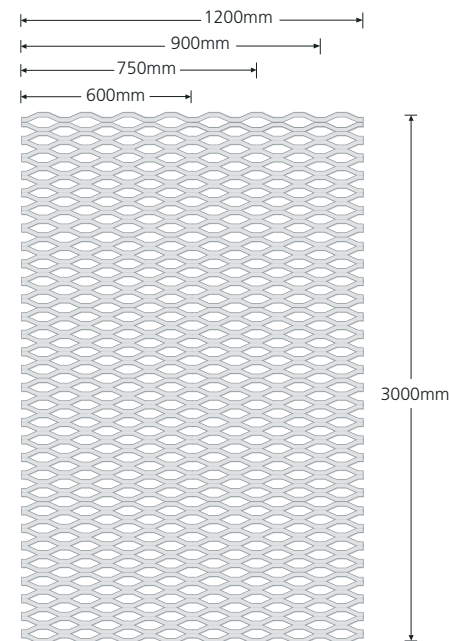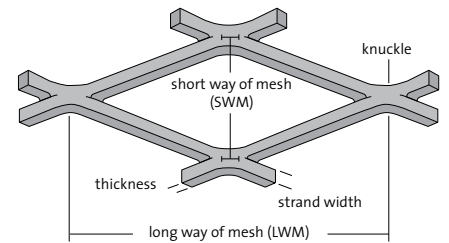


Fixing

Weld to support steel or clamp as shown below.

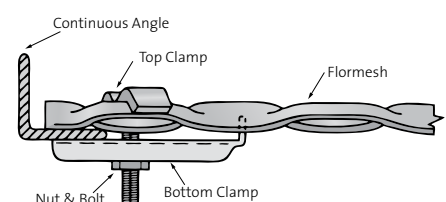


MASTERMESH® EXPANDED METAL STOCK SHEETS


SD0608

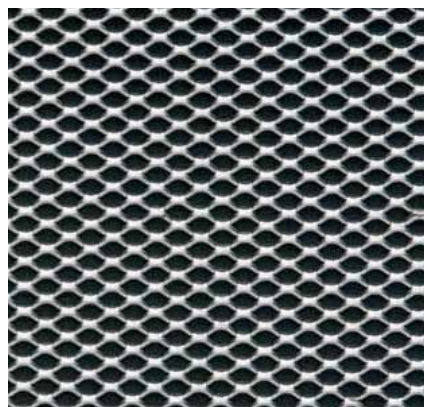

SD0916

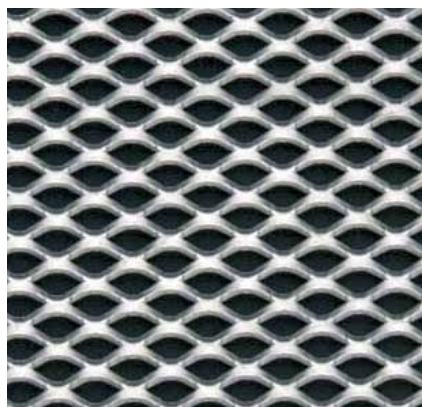

SD0912

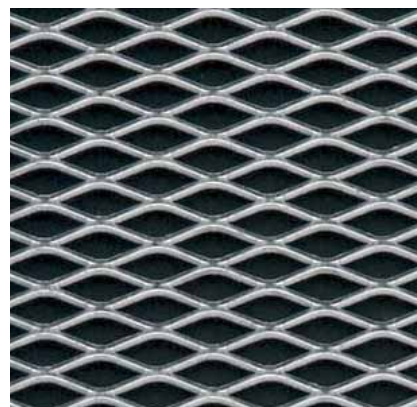

Small Diamond Range

Product Code	Material	Nom. Mesh Dimensions		Nom. Strand Dimensions		Sheet Size LWM x SWM	Approx. Wt (kg/m ²)	Approx. % Open Area
		LWM	SWM	Thickness	Strand Width			
SD0608	Steel	6.00	3.50	0.60	0.76	1200 x 1200	2.02	57
SD0916	Steel	10.00	5.50	0.90	1.55	1200 x 1200	4.10	44
SD0912	Steel	15.00	5.50	0.90	1.17	1200 x 1200	3.00	58

Large Diamond Range


LD1616	Steel	28.00	9.00	1.60	1.60	1200 x 2400	4.40	65
LD1620	Steel	38.00	15.00	1.60	2.00	1200 x 2400	3.30	73
LD1621	Steel	50.00	19.00	1.60	2.10	1200 x 2400	2.30	77
LD3039	Steel	50.00	19.00	3.00	3.90	1200 x 2400	8.30	59
LD2028	Steel	60.00	25.00	2.00	2.80	1200 x 2400	3.50	77
LD3045	Steel	76.00	38.00	3.00	4.50	2400 x 1200	6.70	76
LD3056	Steel	102.00	50.00	3.00	5.60	2400 x 1200	5.70	77

Most of the above meshes can be supplied flattened (F). • Non-standard sheet sizes are available. Conditions apply.

• If you have a requirement not covered in this brochure, contact your nearest sales office (details on back cover) for assistance.

• Open area percentages are approximations only

LD1616

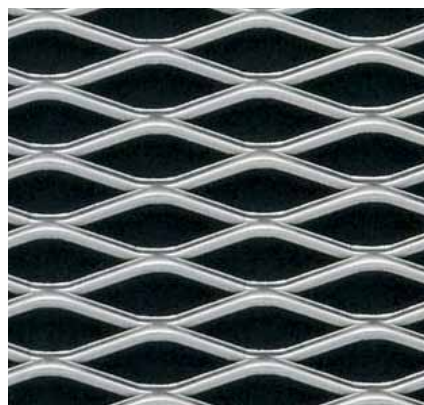

LD1620



LD1621




MASTERMESH® EXPANDED METAL STOCK SHEETS


LD3039




LD2028

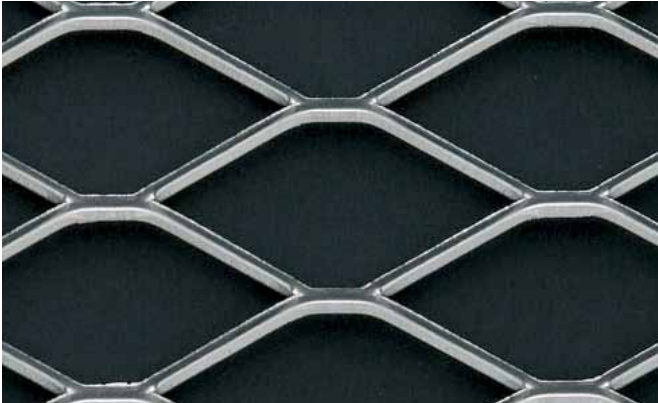


LD3045

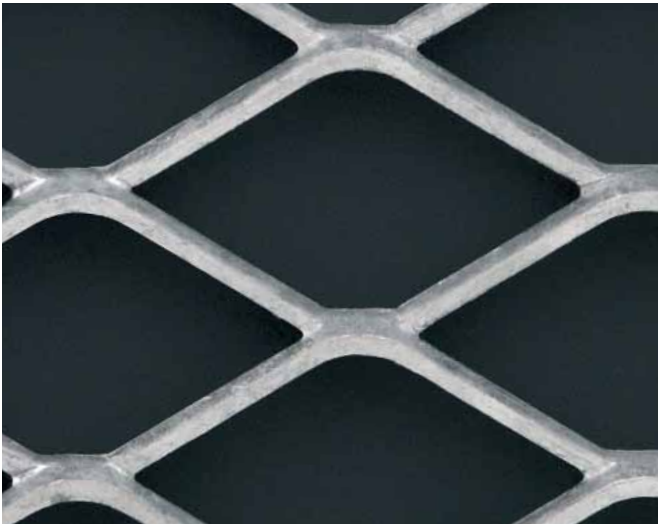

LD3056

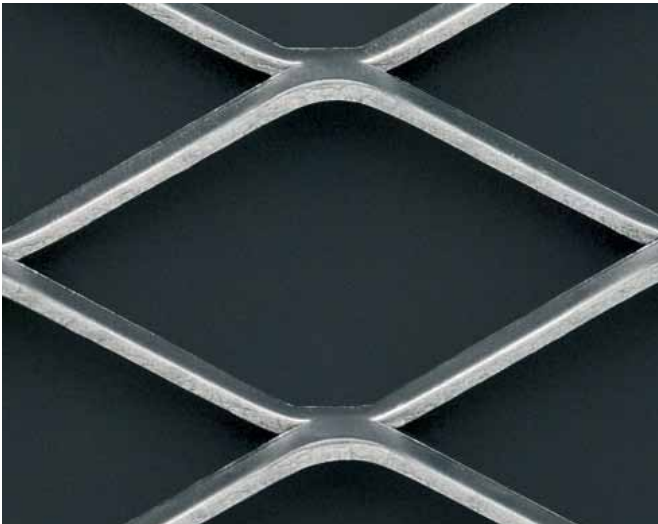

Small diamond range – Miscellaneous

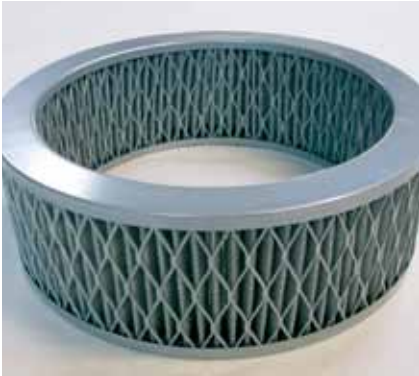

LD1621F – Air filters



LD3045 – Security cages

MASTERMESH® EXPANDED METAL STOCK SHEETS

Security Mesh

Product Code	Material	Nom. Mesh Dimensions		Nom. Strand Dimensions		Sheet Size LWM x SWM	Approx. Wt (kg/m ²)	Approx. % Open Area
		LWM	SWM	Thickness	Strand Width			
SM3030	STEEL	19.00	12.00	3.00	3.00	1200 x 2400	12.00	50
SM3056	STEEL	102.00	50.00	3.00	5.60	1800 x 750	5.70	77
SM3056	STEEL	102.00	50.00	3.00	5.60	2000 x 800	5.70	77
SM3056	STEEL	102.00	50.00	3.00	5.60	2000 x 1100	5.70	77

Decorative Mesh


DM3032	STEEL	102.00	25.00	3.00	3.20	2400 x 1200	5.40	74
--------	-------	--------	-------	------	------	-------------	------	----

Sunscreen Mesh

SUN1663	STEEL	76.00	16.00	1.60	6.30	2400 x 1200	11.08	22
SUN1611	STEEL	75.00	30.00	1.60	10.50	2400 x 1200	9.68	30

- Non-standard sheet sizes are available. Conditions apply.
- If you have a requirement not covered in this brochure, contact your nearest sales office (details on back cover) for assistance.
- Open area percentages are approximations only

SM3030

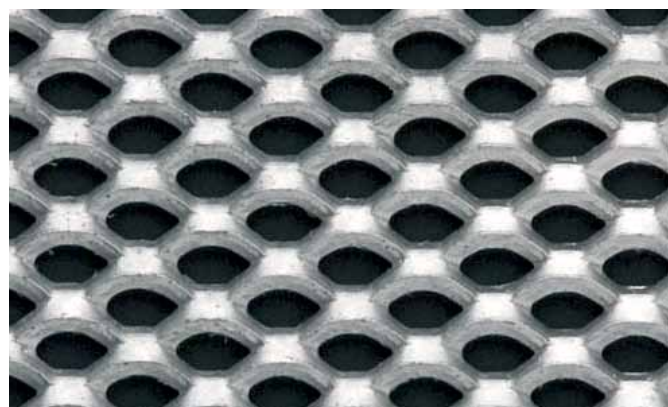

SM3056



SM3030 – Security doors




SM3030 – Security gates



LD3056 – Security window/door grilles


MASTERMESH® EXPANDED METAL STOCK SHEETS

DM3032

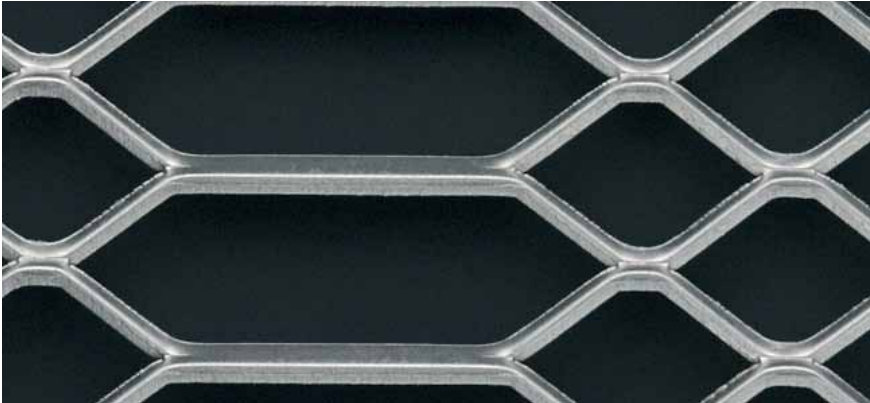


DM3032 – Balustrade infill panels

SUN1663G

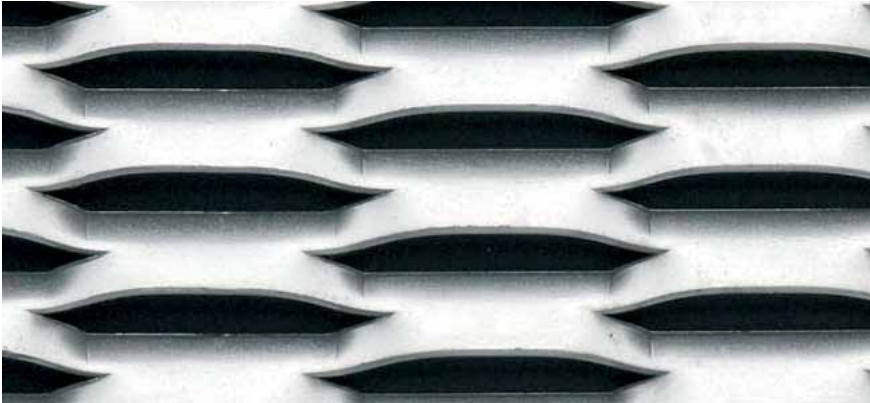

SUN1663 – Anti-glare screens

SUN1611G

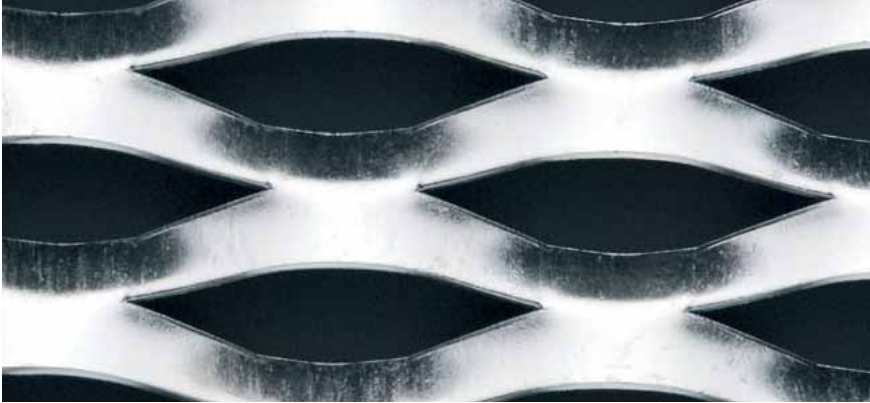

SUN1611 – Car park screens

Information contained in this brochure is supplied in good faith and with the view to assist the user in the correct selection of our products. While every care is taken to ensure that the information contained in this brochure is correct, no warranty is made nor is any condition expressed or implied. As the use of products sold is beyond our control, a condition of purchase is that the purchaser accepts responsibility for ensuring that products purchased are suitable for the intended use. NEPEAN Building & Infrastructure is committed to continual product improvement and therefore reserves the right to change details and designs without notice. © NEPEAN Building & Infrastructure, February 2013.

NEPEAN
Building & Infrastructure

HEAD OFFICE

NSW

117-153 Rookwood Road
(PO Box 57)
Yagoona NSW 2199
Australia

P: + 61 2 9707 5000
F: + 61 2 9790 6145
E: bi@nepean.com

BRANCHES

NSW (COFFS HARBOUR)

47 Wingara Drive
(PO Box 396)
Coffs Harbour, NSW 2450
Australia

P: + 61 2 6652 4100
F: + 61 2 6652 2285
E: coffs.bi@nepean.com

QLD

967 Nudgee Road
(PO Box 283)
Banyo QLD 4014

P: + 61 7 3633 1333
F: + 61 7 3633 1313
E: qld.bi@nepean.com

VIC

171 Derrimut Drive
Derrimut VIC 3030
Australia

P: + 61 3 9394 1001
F: + 61 3 9394 1441
E: vic.bi@nepean.com

WA

98 Campbell Street
Belmont WA 6104
(PO Box 267
Cloverdale, WA 6985)


P: + 61 8 9478 1034
F: + 61 8 9277 7742
E: wa.bi@nepean.com

CHINA

12F Digital Mansion
16 Huizhandonglu Road
Torch Zone, Zhongshan City
Guangdong Province
P.R. China 528437

P: + 86 760 8992 3558
F: + 86 760 8992 3559
M: + 86 159 1334 3700 (China)
M: + 61 419 782 122 (Australia)
E: nepean.asia@nepean.com

www.nepean.com

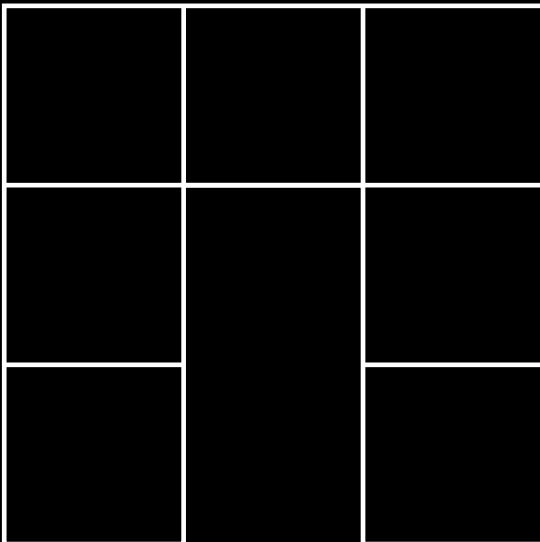

TM