

# Smart Standard Reader

The PAC Mifare® Standard reader is a contactless Smart card reader with concealed fixings that allow the reader to be mounted directly on to a flush surface single gang UK back box, providing a fast and simple solution to many site requirements.

The Smart standard reader is a low profile, robust epoxy filled unit that is built to withstand the harshest of environments and operations. It can be installed in new sites or as an upgraded reader to existing proximity access control systems.

The reader incorporates a red/green LED and buzzer that can be configured within the security system to provide visual and audible feedback for confirmation on access control modes.



## Key Features:


- Contactless Mifare® technology
- Fits UK single gang back box for easy installation
- Conventional security wiring
- Interchangeable with any existing PAC readers
- Visual and audible feedback
- IP67 standard finish for internal and external applications
- 2 year warranty



## Features & Specification

Description	Smart Standard Mifare® Access Reader
ID Technology	Mifare®
Dimensions	H: 90mm W: 90mm D: 27mm
Output Formats	PAC
Weight	135g nominal
Maximum Read Range	Up to 60mm
Environment	IP67 - Indoor / Outdoor weather resistant
Maximum Current Requirements	Normal 120mA Activated 140mA
Cable Distance	0.22mm <sup>2</sup> cable 100m max 0.33mm <sup>2</sup> cable 250m max
Operating Temperature	-10° to +55° C
Operating Humidity	0 to 90% relative humidity non-condensing
Audiovisual Indication	LED and buzzer
Material	Charcoal plastic
Certifications	CE Mark, Fifteen EU Countries under the R&TTE Directive (EN60950 - ITE Electrical Safety, ETS EN 300 330 - SRD, and ETS EN 301 489 - EMC)

## Smart Standard Reader

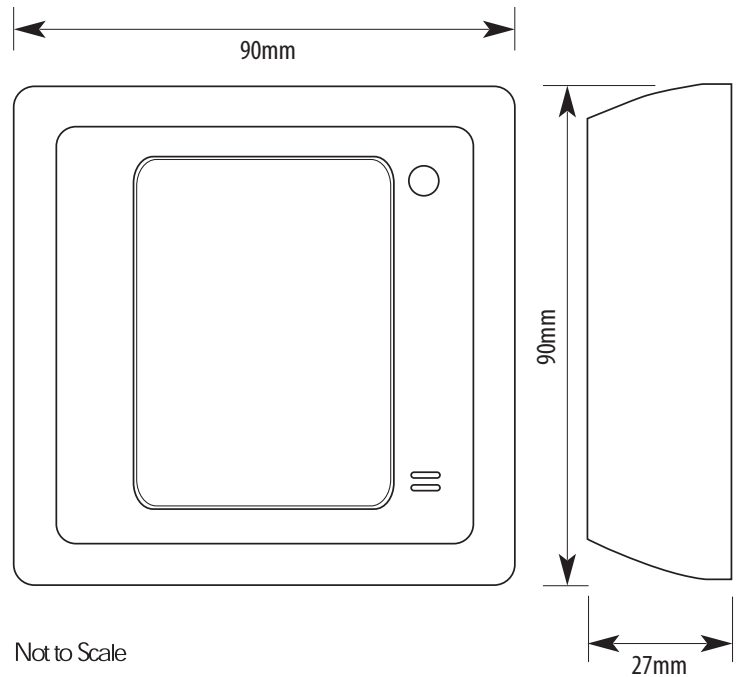

## Ordering Information

Part Number	Description
40192	PAC Smart Mifare® Reader
40193	PAC Smart Reader Backbox

## ACCESSORIES

### PAC® Smart Card

40090 Smart Cards



- Uses Mifare® (13.56MHz) proximity technology
- Durable & robust
- Offers a unique ID code
- Meets ISO standards for thickness
- Can be used with all direct image or thermal transfer printers
- Design your own card layout using Badge Designer in SecureNet or EasiNet Residential
- H: 54 x W: 86 x D: 0.76mm

### Backbox

40193

Backbox for Standard Reader



## STANLEY Security Products

PAC Access Control, 1 Park Gate Close, Bredbury, Stockport, Cheshire, SK6 2SZ  
Tel: +44 (0) 161 406 3400 Fax: +44 (0) 161 406 8984 Email: customerservices@stanleysecurityproducts.com  
[www.stanleysecurityproducts.com](http://www.stanleysecurityproducts.com)