



***USERS' MANUAL***

**Structure and Functions:**

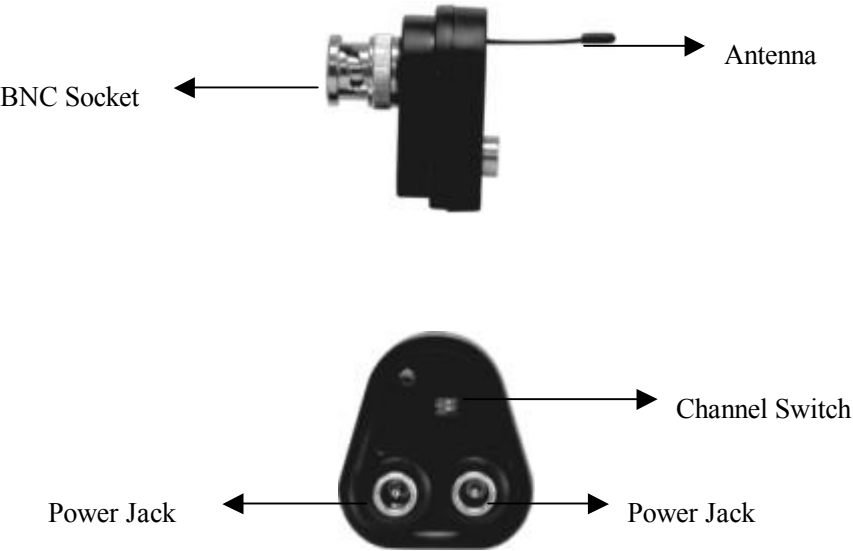


**Channel Switching Diagram:**

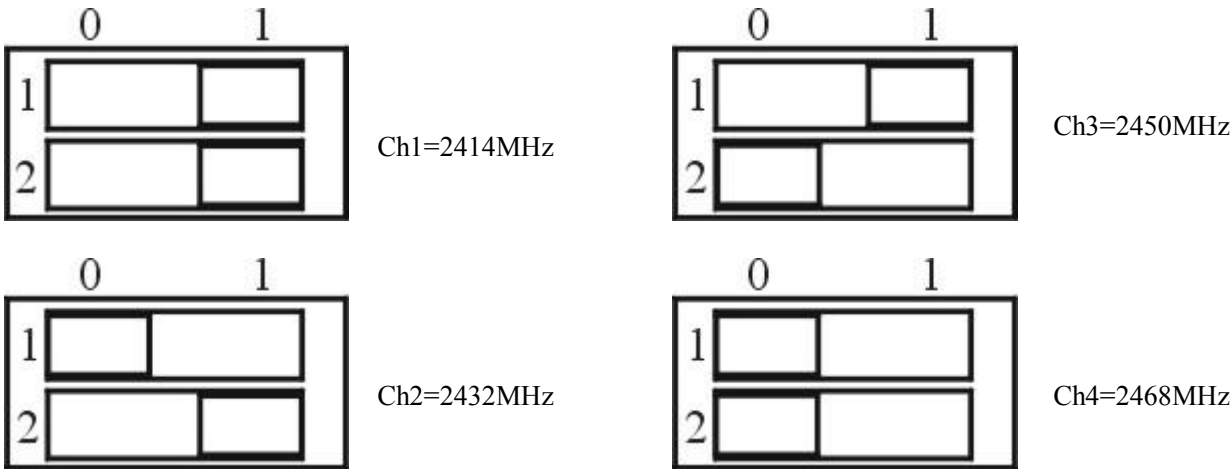


**Installation:**


1. Connect the connector and the camera by BNC socket.

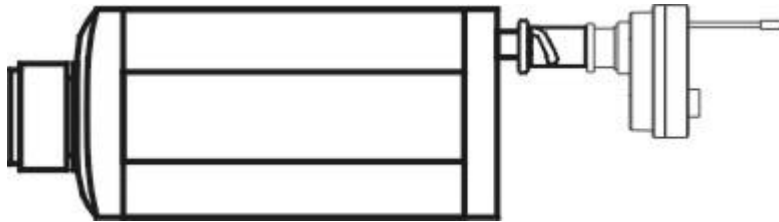

2. Connect the power jacks of the connector and the camera by the power cable (either end of the cable is permitted).

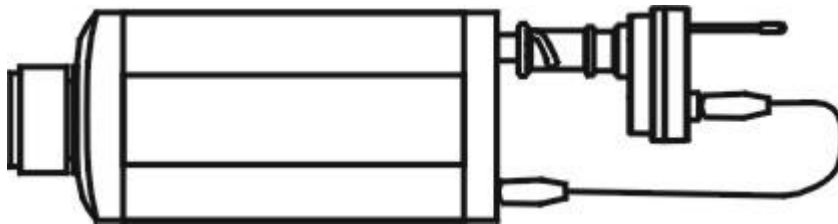

3. Connect the other power jack of the connector with 12V adapter. Then power up, wait for the indicator light to turn on.

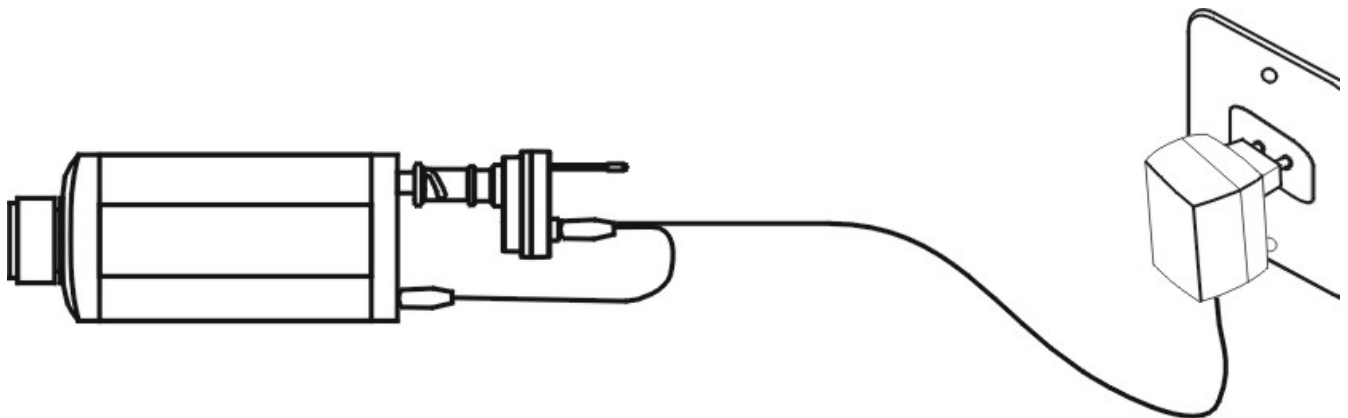

4. Install the receiver and connect it to the monitor/TV.
5. Adjust the receiver's channel corresponding to the 401D's channel.
6. Adjust the setting of brightness, contrast, color of monitor/TV to get the best display effect.

**Specification:**

Item	Unit	Value
Frequency	MHz	ISM 2,400~2,483 4CH*
Transmission Power	mW	10mW / CE; 2mW / FCC
Modulation Mode	--	FM
Bandwidth	MHz	18
Power Supply	V <sub>DC</sub>	+12
Consumption Current	mA	50(Max)
Operating Temperature	°C/°F	-10 ~ +50 / +14 ~ +122
Storage Temperature	°C/°F	-40 ~ -85 / -40 ~ +185
Operating Humidity	RH	85%
Dimensions(WxLxH)	mm	39x35x33
Weight	g	25
Unobstructed Effective Range	m	100(Min)

**Notice:**

1. The machine is supplied with many different types, please provide with electric power according the value on the label.
2. Obstructs by the building and so in will cause attenuation.
3. Normally that the machine will slightly warm up during operation.
4. Should any other malfunctions occur, please contact local distributor.
5. Under normal operational conditions, one year's warranty is granted .if there are quality problems within 3 months, this company will unconditionally replace with a new camera.

**Waning:**

This product is for the sole purpose of security and applicable for monitoring in residential houses, shop sand companies the users shall observe local rules, regulations and laws, and shall be solely liable in this regard, this company shall not be liable for any illegalities therein.

**FCC Information**

This device complies with part 15 of the FCC Rules, Operation is subject to the following two conditions: (1)This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Changes or modifications not expressly approved by Summer infant may void the users authority to operate this equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications, However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and the receiver
- Consult the dealer or an experienced radio / TV technician for help.