

Washer extractor

Wascator FOM71 CLS

Features and benefits

- Meets IEC and ISO international standards
- Suitable for testing washing effects of detergents and chemicals and for textile quality control
- Suspended drum construction allows a high extraction force. No foundation required
- Small space between outer/inner drum for efficient use of water and detergent
- Dual water control of volume (weight) and level
- Built in scale for precise volume control, accuracy:
 - volume control +/- 0.2 litre/bath
 - level control +/- 0.8 litre/bath
- Equipped with Clarus Control® - a fully programmable electronic timer
- Frequency controlled motor system for flexibility in programming and precise speed
- Test tap for water samples
- Stainless steel drum assembly, front, side and top panel



Main options




- WPM (Wash Program Manager) PC programming kit in Windows
- Extra program memory cards

Main specifications		Wascator FOM71 CLS	
Drum,	volume	litre	61
	diameter	Ø mm	520
Extraction, max		rpm	1100
G-factor, max			350
Heating	electricity	kW	5.4

Certified in accordance with ISO 9001 and ISO 14001 and approved IP 24D.

Electrical connections*		Wascator FOM71 CLS
Heating	Voltage	
El.	230V 3AC 50 Hz kW(A)	5.7(16)
	400-415V 3N AC 50 Hz kW(A)	5.7(10)
	415V 3N AC 50 Hz kW(A)	5.7(10)
Water and steam connection		
Water valves	DN	20
Water pressure	kPa	150-400
Capacity at 300 kPa	l/min	20
Drain valve	ømm	50/75
Draining capacity	l/min	150
Liquid detergent supplies		4
Floor requirements		
Frequency of the dynamic force	Hz	18.3
Max floor load at extraction	kN	1.6±0.5
Sound levels		
Airborne sound level	dB(A)	71
Shipping data		
Weight	net, kg	195
	crated, kg	211
Shipping volume	m ³	0.89
Accessories		
Hose connection kit for water		x
Dimensions in mm		
A Width		720
B Depth		690
C Height		1315
D		200
E		750
F		555
G		720
H		1230
I		220
K		1010
L		135
M		825
N		45
O		100
P		240
R		135
1 Electrical connection	6 Control panel	
2 Cold water	7 Soap box	
3 Hot water	8 Door opening ø310	
4 Drain		
5 Liquid supply connections		

* Other voltages available, see installation manual.

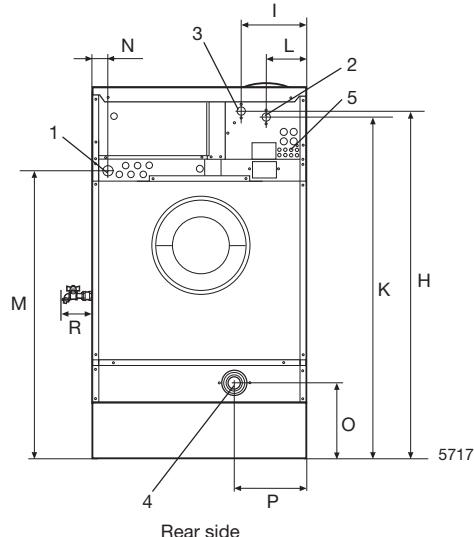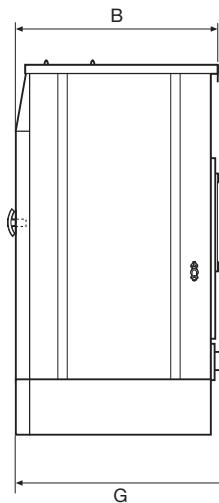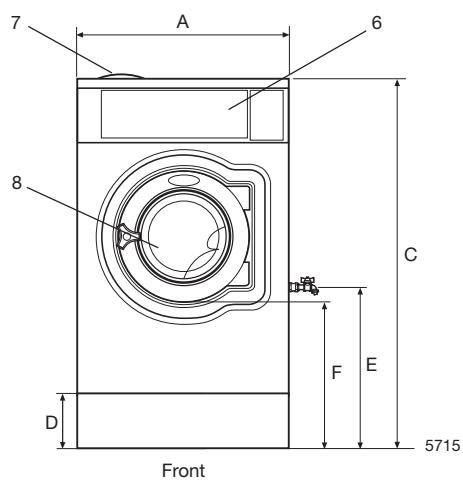

Function/subsystem

Ambient conditions	
The machine shall be able to function during the same ambient conditions as normal washing machines. The functional values with tolerances will be valid if following ambient conditions are kept.	
Voltage	Nominal $\pm 2\%$
Frequency	Nominal $\pm 2\%$
Inlet water Cold	(15 ± 2) °C
Hot	Max (60 ± 2) °C
Water pressure	(240 ± 50) kPa
Ambient temperature	(20 ± 5) °C
Inner drum	
Diameter	(520 ± 1) mm
Depth	(315 ± 1) mm
Volume	61 l
Lifting vanes: Number	3
Height	53 mm
Radius	17 mm
Base width	65 mm
Perforation: Diameter	5 mm
Depth of countersink	2.5 mm
Total hole area	600 cm ²
Material: Stainless steel	2333 (SS 18/8)
Outer drum	
Diameter	554 mm
Sump	~ (1300 ± 25) ml
Material: Stainless steel	2333 (SS 18/8)
Door opening	
Opening diameter	310 mm
Cabinet	
Stainless steel	2333 (SS 18/8)
Drum speed	
Washing speed: Programmable	(20 – 59 ± 1) RPM
Extraction: Programmable	(200 – 1100 ± 20) RPM
Reversing rythm	
Programmable	(0 – 250 ± 0.1) = sec. (Tolerance area refers to timer intervals)
Water level	
Weight sensing	
Repeatability	$\leq \pm 0.1$ kg/bath
Stepsize	0.05kg
Dosing accuracy weight control	$\leq \pm 0.2$ kg/bath
Level sensing:	
Repeatability	$\leq \pm 5$ mm
Stepsize	3 mm
Dosing accuracy level control	$\leq \pm 0.8$ litre/bath
Thermostat	
Continuos variable in each wash sequence	Yes
Selectable interval	(4-97) °C
Programming steps	1 °C
Switch off temperature accuracy in Interval 30-97 °C	± 1 °C
Interval switch off temperature – switch on temperature	≤ 4 °C

Soap box	
Number of compartments	4
Number of programmable liquid detergents	4
Wash programs	
Fully programmable wash programs	Clarus
Memory cards for	IEC 60456
	ISO 6330
	M&S
Approvals	
The machine shall have same approvals as normal washing machines	CE, cETLus
Special equipment	
Manual tap for sampling of bath water on right side:	Yes
Connection for temperature recording sensor in rear	Yes
gable:	Yes
Possibility to connect lint trap:	Yes
Memory card with copy safe programs for M&S and (IEC; ISO):	Yes
Procedure for calibration of the machine according to ISO 9000 rules:	Yes
Possibility to take out test pieces from wash bath during the wash:	Yes
Analog output from load cells to data acquisition systems:	Yes

Pre- programmed wash programs

The Clarus Control in the Wascator FOM71 CLS contains 9 pre- programmed "wash programs". They are not real wash programs but are mainly designated for checking purposes. The stored programs are:

Place	Name	Content
991	Start-up Programme	Flushes the machine with water. Shall be used if the machine has been idle for more than 2 hours.
992	Level check	Checking of the level. With ruler inside the machine fills to 100 mm, 130 mm, 160 mm, and 200 mm.
993	Weight check	Machine fills water to 18kg and to 26kg.
994	Temperature check	Check of the temperatures at 25°C, 40°C, 60°C and 90°C 2 minutes at each temperature.
995	Extraction	500 RPM 1 min.
996	Extraction	500 RPM 5 min.
997	Extraction	775 RPM 2 min.
998	Extraction	950 RPM 4 min.
999	Extraction	1100 RPM 5 min.



ELECTROLUX LAUNDRY SYSTEMS

Lundtoftegaardsvej 93A, DK-2800 Lyngby, Denmark
 Telephone: +45 4526 4800. Telefax: +45 4526 4801
 Internet: www.electrolux.com/laundrysyste
 E-mail: els.info@electrolux.com

 **The Electrolux Group.** The world's No.1 choice.

The Electrolux Group is the world's largest producer of powered appliances for kitchen, cleaning and outdoor use. More than 55 million Electrolux Group products (such as refrigerators, cookers, washing machines, vacuum cleaners, chain saws and lawn mowers) are sold each year to a value of approx. USD 14 billion in more than 150 countries around the world.