

# OpenStage 15/15G, OpenStage Key Module 15 HiPath 3000, OpenScape Business, OpenScape Office

**Operating Instructions**

A31003-S2000-U134-10-7619

Unser Qualitäts- und Umweltmanagementsystem ist  
entsprechend den Vorgaben der ISO9001 und ISO14001  
implementiert und durch ein externes  
Zertifizierungsunternehmen zertifiziert.

Copyright © Unify GmbH & Co. KG <03/2014>  
Hofmannstr. 51, 81379 München/Deutschland

Alle Rechte vorbehalten.




Sachnummer: A31003-S2000-U134-10-7619

Die Informationen in diesem Dokument enthalten lediglich allgemeine Beschreibungen bzw. Leistungsmerkmale, die je nach Anwendungsfall nicht immer in der beschriebenen Form zutreffen oder sich durch Weiterentwicklung der Produkte ändern können. Eine Verpflichtung, die jeweiligen Merkmale zu gewährleisten besteht nur, sofern diese ausdrücklich vertraglich zugesichert wurden.

Liefermöglichkeiten und technische Änderungen vorbehalten.

Unify, OpenScape, OpenStage und HiPath sind eingetragene Warenzeichen der Unify GmbH & Co. KG. Alle anderen Marken-, Produkt- und Servicennamen sind Warenzeichen oder eingetragene Warenzeichen ihrer jeweiligen Inhaber.

## Important information

	<p>For safety reasons, the telephone should only be supplied with power:</p> <ul style="list-style-type: none"> <li>• using the original power supply unit. Part number: L30250-F600-C14x (x: 1=EU, 2=UK, 3=US) or</li> <li>• in a LAN with PoE (Power over Ethernet), which complies with the IEEE 802.3af standard.</li> </ul>
	<p>Never open the telephone or a key module. Should you encounter any problems, consult your administrator.</p>
	<p>Use only original accessories. The use of other accessories may be hazardous and will render the warranty, extended manufacturer's liability and the CE marking invalid.</p>

## Trademarks



The device conforms to the EU Directive 1999/5/EC as attested by the CE marking.

All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.

The correct disposal and separate collection of your old appliance will help prevent potential negative consequences for the environment and human health. It is a precondition for reuse and recycling of used electrical and electronic equipment.



For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service, the shop where you purchased the product or your sales representative.

The statements quoted above are only fully valid for equipment that is installed and sold in the countries of the European Union and is covered by the European Directive 2002/96/EC. Countries outside the European Union may have other regulations regarding the disposal of electrical and electronic equipment.

## Location of the telephone

- The telephone should be operated in a controlled environment with an ambient temperature between 5°C and 40°C.
- To ensure good speakerphone quality, the area in front of the microphone (front right) should be kept clear. The optimum speakerphone distance is 50 cm.
- Do not install the telephone in a room where large quantities of dust accumulate; this can considerably reduce the service life of the telephone.
- Do not expose the telephone to direct sunlight or any other source of heat, as this is liable to damage the electronic components and the plastic casing.
- Do not operate the telephone in damp environments, such as bathrooms.

## Software update

- 
- ▶ During a software update, the phone must not be disconnected from the power supply unit, the LAN line or the phone line.  
An update action is indicated by messages on the display and/or by flashing LEDs.
- 

## Product support on the Internet

Information and support for our products can be found on the Internet at:  
<http://www.unify.com>.

Technical notes, current information about firmware updates, frequently asked questions and lots more can be found on the Internet at:  
<http://wiki.unify.com/>.

# Contents

<b>Important information</b> . . . . .	<b>3</b>
Trademarks . . . . .	3
Location of the telephone . . . . .	4
Software update . . . . .	4
Product support on the Internet . . . . .	4
<b>General information</b> . . . . .	<b>10</b>
About this manual . . . . .	10
Service . . . . .	10
Intended use . . . . .	11
Telephone type . . . . .	11
Speakerphone quality and display legibility . . . . .	11
Voice encryption . . . . .	11
Multi-line telephone, executive/secretary functions . . . . .	12
Group functions . . . . .	12
<b>Getting to know the OpenStage</b> . . . . .	<b>13</b>
The user interface of your OpenStage 15/15G . . . . .	13
Ports on the underside of the phone . . . . .	14
Using network ports more efficiently . . . . .	14
OpenStage Key Module 15 . . . . .	15
Keys . . . . .	16
Audio keys . . . . .	16
Mailbox key and Menu key . . . . .	16
Navigation keys . . . . .	16
Programmable function keys . . . . .	17
Dialpad . . . . .	18
Display . . . . .	18
Idle mode . . . . .	18
Mailbox . . . . .	19
Messages . . . . .	19
Voicemail . . . . .	19
Caller list . . . . .	20
Menu . . . . .	21
Control and monitoring function . . . . .	21
<b>Basic functions</b> . . . . .	<b>22</b>
Accepting a call . . . . .	22
Accepting a call via the handset . . . . .	22
Accepting a call via the loudspeaker (speakerphone mode) . . . . .	23
Switching to speakerphone mode . . . . .	23
Switching to the handset . . . . .	23
Open listening in the room during a call . . . . .	24
Making calls . . . . .	24
Off-hook dialing . . . . .	24
On-hook dialing . . . . .	24
Dialing with redial keys . . . . .	25
Redialing a number . . . . .	25
Ending a call . . . . .	25
Rejecting calls . . . . .	26

Turning the microphone on and off . . . . .	26
Calling a second party (consultation) . . . . .	27
Switching to the held party (alternating) . . . . .	27
Transferring a call . . . . .	27
Forwarding calls . . . . .	28
Using variable call forwarding . . . . .	28
Using call forwarding no reply (CFNR) . . . . .	29
Call forwarding in the event of telephone failure (CFSS) . . . . .	30
Call forwarding in the carrier network and forwarding multiple subscriber numbers (MSN) (not for U.S.) . . . . .	31
Using callback . . . . .	32
Saving a callback . . . . .	32
Accepting a callback . . . . .	32
Viewing and deleting a saved callback . . . . .	33
<b>Enhanced phone functions . . . . .</b>	<b>34</b>
Accepting calls . . . . .	34
Accepting a specific call for your colleague . . . . .	34
Using the speakerphone . . . . .	34
Answering calls from the entrance telephone and opening the door . . . . .	35
Making calls . . . . .	37
En-bloc sending/correcting numbers . . . . .	37
Using the caller list . . . . .	38
Calling a subscriber from the personal phonebook . . . . .	39
Calling a subscriber from the corporate directory . . . . .	39
Calling a subscriber from the internal system phonebook . . . . .	39
Using the LDAP directory from the system phonebook . . . . .	40
Making calls using system speed-dial numbers . . . . .	42
Dialing with speed-dial keys . . . . .	42
Talking to your colleague with a speaker call . . . . .	43
Talking to your colleague with discreet calling . . . . .	44
Automatic connection setup (hotline) . . . . .	44
Reserving a trunk . . . . .	44
Assigning a station number (not for U.S.) . . . . .	45
Associated dialing/dialing aid . . . . .	45
During a call . . . . .	46
Using call waiting (second call) . . . . .	46
Preventing and allowing call waiting (automatic camp-on) . . . . .	47
Turning the call waiting tone on and off . . . . .	47
Saving a number . . . . .	47
Parking a call . . . . .	48
Holding external calls . . . . .	49
Conducting a conference . . . . .	50
Activating tone dialing/DTMF suffix dialing . . . . .	51
Recording a call . . . . .	52
Transferring a call after a speaker call announcement in a group . . . . .	52
Sending a trunk flash . . . . .	53
If you cannot reach a destination . . . . .	53
Call waiting (camp-on) . . . . .	53
Busy override - joining a call in progress . . . . .	53
Using night answer . . . . .	54



<b>Programming the function keys</b> . . . . .	<b>55</b>
Configuring function keys . . . . .	55
Overview of functions . . . . .	56
Programming a procedure key . . . . .	58
Configuring redial keys . . . . .	59
Deleting function key programming . . . . .	59
<b>Displaying and assigning call charges</b> . . . . .	<b>60</b>
Displaying call charges (not for U.S.) . . . . .	60
Displaying call charges for another telephone (not for U.S.) . . . . .	60
Dialing with call charge assignment . . . . .	61
<b>Privacy/security</b> . . . . .	<b>62</b>
Voice encryption . . . . .	62
Displaying status . . . . .	62
Notes on voice encryption . . . . .	63
Turning ringer cutoff on and off . . . . .	63
Activating/deactivating "Do not disturb" . . . . .	64
Caller ID suppression . . . . .	64
Monitoring a room . . . . .	65
Trace call – identifying anonymous callers (not for U.S.) . . . . .	65
Locking the telephone to prevent unauthorized use . . . . .	66
Locking another telephone to prevent unauthorized use . . . . .	66
Saving your PIN code . . . . .	67
<b>More functions/services</b> . . . . .	<b>68</b>
Appointment reminder function . . . . .	68
Saving a timed reminder . . . . .	68
Using timed reminders . . . . .	69
Sending a message . . . . .	69
Creating and sending a message . . . . .	69
Viewing and editing incoming messages . . . . .	70
Leaving an advisory message . . . . .	70
Deleting advisory messages . . . . .	71
Displaying the number of waiting calls/overload display . . . . .	71
Using another telephone like your own for a call . . . . .	71
Using a mobile phone number at a random phone . . . . .	72
Logging on to the "guest telephone" . . . . .	72
Moving the connection to the next telephone . . . . .	73
Logging off from the "guest telephone" . . . . .	73
Fax details and message on answering machine . . . . .	73
Resetting services and functions (system-wide cancellation for a telephone) . . . . .	74
Activating functions for another telephone . . . . .	74
Using system functions from outside DISA (Direct Inward System Access) . . . . .	75
Using functions in ISDN via code dialing (keypad dialing) . . . . .	76
Controlling connected computers/programs/telephone data service . . . . .	77
Communicating with PC applications over a CSTA interface . . . . .	78
Controlling relays (only for HiPath 3000) . . . . .	78
Sensors (HiPath 33x0/35x0 only) . . . . .	79
Paging persons (not for U.S.) . . . . .	79

<b>Phonebooks . . . . .</b>	<b>80</b>
Personal phonebook . . . . .	80
Creating a new contact . . . . .	80
Editing a contact . . . . .	80
Deleting a contact . . . . .	81
Deleting all contacts . . . . .	81
Searching for a contact . . . . .	82
Corporate directory . . . . .	83
Searching for a contact . . . . .	83
Advanced phonebook editing . . . . .	84
Quick search . . . . .	85
<b>Making calls in the team/executive/secretary configuration . . .</b>	<b>86</b>
Lines . . . . .	86
Line utilization . . . . .	86
Line seizure . . . . .	86
Line/trunk keys . . . . .	86
Accepting calls with the trunk keys . . . . .	87
Dialing with trunk keys . . . . .	87
Placing a call on hold on a trunk key and retrieving the held call . . . . .	88
Making calls on multiple lines alternately . . . . .	88
MULAP conference release . . . . .	88
Direct station selection keys . . . . .	89
Using DSS keys to answer calls . . . . .	89
Calling a team member directly . . . . .	89
Transferring a call in progress . . . . .	90
Accepting a call for another team member . . . . .	90
Forwarding calls on trunks . . . . .	90
Transferring calls directly to the executive phone . . . . .	93
<b>Using team functions . . . . .</b>	<b>94</b>
Activating/deactivating a group call . . . . .	94
Picking up a call for another member of your team . . . . .	96
Ringing group . . . . .	96
Uniform Call Distribution (UCD) . . . . .	97
<b>Special functions in the LAN . . . . .</b>	<b>99</b>
Leaving hunt group/group call . . . . .	99
Setting up "follow me" call forwarding . . . . .	100
Using night answer . . . . .	101
Ringing group . . . . .	102
Controlling relays (only for HiPath 3000) . . . . .	103
Opening a door . . . . .	103



<b>Individual phone configuration</b> .....	<b>104</b>
Setting contrast .....	104
Audio .....	104
Setting the ring tone mode .....	104
Adjusting audio settings .....	105
Adjusting the receiving volume during a call .....	105
Adjusting the ring volume .....	105
Adjusting the ringer pitch .....	105
Adjusting the attention ring volume .....	105
Adjusting the speakerphone to the room acoustics .....	106
Language for system functions .....	106
Setting local ring tones .....	107
Changing the user password .....	108
Network information .....	109
<b>Testing the phone</b> .....	<b>110</b>
Testing the phone's functionality .....	110
Checking the key assignment .....	110
<b>Differing display views in a HiPath 4000 environment</b> .....	<b>111</b>
<b>Web interface</b> .....	<b>112</b>
General .....	112
Launching the web interface .....	112
Administrator Pages .....	112
User Pages .....	113
User menu .....	114
<b>Fixing problems</b> .....	<b>115</b>
Responding to error messages .....	115
Contact partner in case of problems .....	116
Troubleshooting .....	116
Care and cleaning instructions .....	116
Labeling keys .....	116
<b>Local user menu</b> .....	<b>117</b>
Opening the user menu on the phone .....	117
User menu display .....	117
<b>Index</b> .....	<b>119</b>
<b>Overview of functions and codes (alphabetical)</b> .....	<b>123</b>

we highlighted the variables in red. You will see, that quite a bit of display texts are no variables.

## General information

### About this manual

This document contains general descriptions of the technical options, which may not always be available in individual cases. The required features must therefore be individually defined in the terms of the contract.


If a particular function on your phone is not available to you as described, this may be due to one of the following reasons:

- The function is not configured for you and your telephone. Please contact your system administrator.
- Your communication platform does not feature this function. Please contact your Unify sales partner for information on how to upgrade.

This user guide is intended to help you familiarize yourself with the **OpenStage** phone and all of its functions. It contains important information on the safe and proper operation of the **OpenStage** phone. These instructions should be strictly complied with to avoid operating errors and ensure optimum use of your multifunctional telephone.

These instructions should be read and followed by every person installing, operating or programming the **OpenStage** phone.

---

 For your own protection, please read the section dealing with safety in detail. Follow the safety instructions carefully in order to avoid endangering yourself or other persons and to prevent damage to the unit.


---

These operating instructions are designed to be simple and easy to understand, providing clear step-by-step instructions for operating the **OpenStage** phone.

Administrative tasks are dealt with in a separate manual. The Quick Reference Guide contains quick and reliable explanations of frequently used functions.

### Service

---

 The Unify service department can only help you if you experience problems or defects with the phone itself.  
Should you have any questions regarding operation, your specialist retailer or network administrator will gladly help you.  
For queries regarding connection of the telephone, please contact your network provider.

---

If you experience problems or defects with the phone, please dial the service number for your country.

## Intended use

The **OpenStage** phone is a desktop or wall-mounted unit designed for voice transmission and for connection to a LAN. Any other use is regarded as unintended.

## Telephone type

The identification details (exact product designation and serial number) of your telephone can be found on the nameplate on the underside of the base unit.

Specific details concerning your communication platform can be obtained from your administrator. Please always have this information to hand when you contact our service department regarding faults or problems with the product.

## Speakerphone quality and display legibility

- To ensure good speakerphone quality, the area in front of the microphone (front right) should be kept clear. The optimum speakerphone distance is 50 cm.
- Proceed as follows to optimize display legibility:
  - Turn the phone to tilt the display to ensure you have a frontal view of the display and avoid light reflexes.
  - Adjust the contrast as required → Page 104.

## Voice encryption

On HiPath 3000/**OpenScape Business** (from R 4), **OpenScape Office** (V1), your **OpenStage 15/15G** supports voice encryption from software release 2 (V1 R2.xxxx). This allows you to use your **OpenStage** to conduct calls without the risk of eavesdropping. Voice transmission is encrypted and then decrypted again on the call partner's phone and vice versa.

If "Secure Mode" is enabled on your phone and a connection is established to a phone that does not support voice encryption, the call is not encrypted and is thus not secure.

Your administrator can define in your communication system whether you are notified of unencrypted calls and how → Page 63.

## Multi-line telephone, executive/secretary functions

Your **OpenStage 15/15G** is a "multi-line telephone". This means that multiple lines can be configured by your administrator, which is not the case with single-line phones. Each line is assigned an individual phone number that you can use to make and receive calls.

The programmable keys function as line keys on multi-line phones → Page 86.

When using a multi-line phone to make and receive calls, certain particularities must be taken into account → Page 87 ff.

The executive-secretary configuration is a special case. This is a multi-line telephone with special features (e.g. "Ring transfer" and "Pick up call"), configured especially for executive/secretary use → Page 86ff.


## Group functions



For even more efficient telephone functionality, your administrator can configure various team functions such as call pickup, hunt groups and call distribution groups.

## Getting to know the OpenStage


The following sections describe the most frequently used controls and displays.

### The user interface of your OpenStage 15/15G

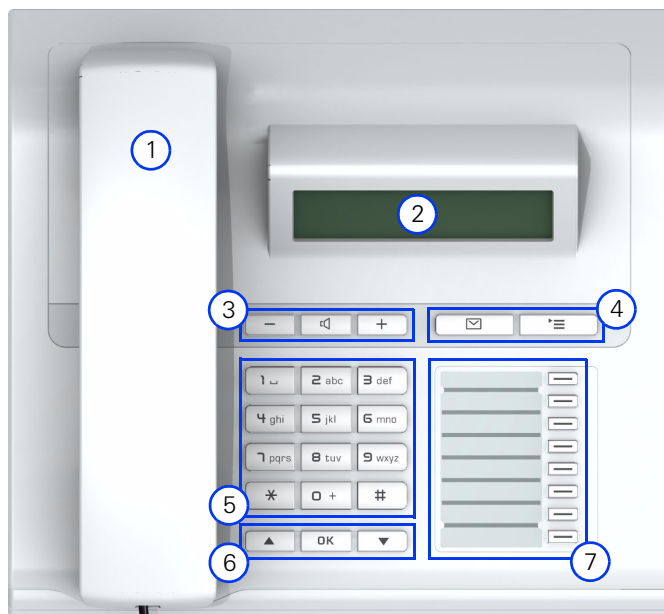

1	You can make and receive calls as normal using the <b>handset</b> .
2	The <b>display</b> permits intuitive operation of the phone → Page 18.
3	<b>Audio keys</b> are also available, allowing you to optimally configure the audio features of your telephone → Page 16.
4	 <b>mailbox key</b> and  <b>menu key</b> .
5	The <b>dialpad</b> is provided for entering phone numbers/codes.
6	The <b>navigation keys</b> are used to operate the phone → Page 16.
7	The <b>programmable keys</b> can be assigned functions (e.g. Release) → Page 55.

## Ports on the underside of the phone

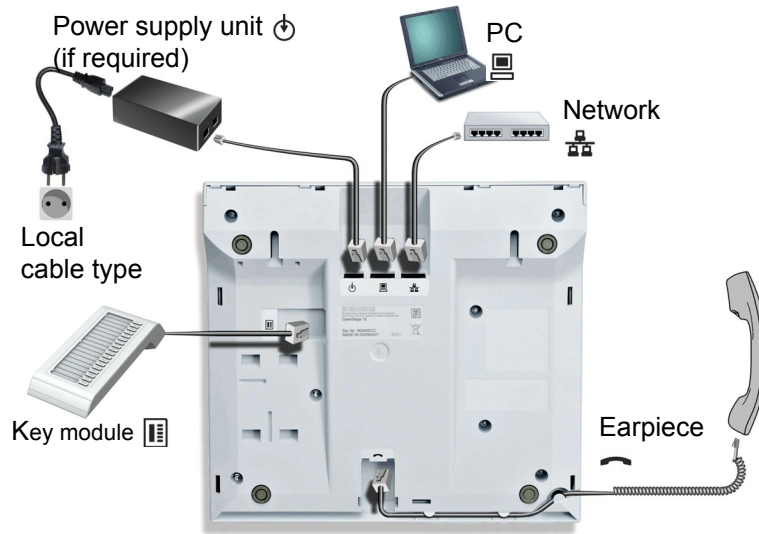


## Properties of your OpenStage 15/15G

	OpenStage 15	15G
LCD, 33 x 2 characters	✓	✓
Full-duplex speakerphone function	✓	✓
Wall mounting	✓	✓
10/100 Mbps Ethernet switch	✓	✓
1000 Mbps Ethernet switch	-	✓
Programmable keys	8	8

## Using network ports more efficiently

OpenStage 15 has a built-in 10/100 Mbps Ethernet switch. OpenStage 15G has a 1000 Mbps Ethernet switch. This means that you can connect a PC to the LAN directly via the phone. The option for connecting the telephone and PC must first be activated on the telephone by your administrator.

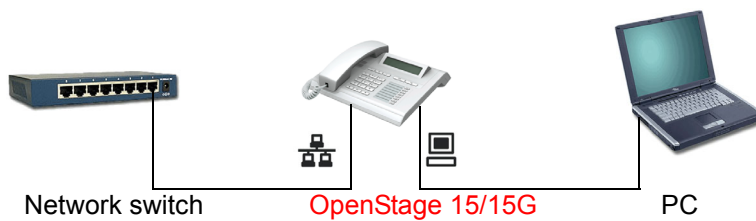

Using this connection option saves one network port for each switch used and requires fewer or shorter network cables when arranged correctly.

## OpenStage Key Module 15

The **OpenStage Key Module 15** is a key module attached to the side of the phone that provides an additional 18 illuminated keys that can only be programmed for phone numbers. Like keys on the phone, these keys can be programmed with phone numbers and used according to your needs → Page 17.







You can only attach one **OpenStage Key Module 15** to your **OpenStage 15/15G**.



## Keys



### Audio keys



Key	Function when key is pressed
	Reduce volume and set contrast brighter → Page 104.
	Turn speaker on/off (with red key LED) → Page 24.
	Increase volume and set contrast darker → Page 104.


### Mailbox key and Menu key






Key	Function when key is pressed
	Open mailbox (with red key LED) → Page 19.
	Open menu (with red key LED) → Page 21.

### Navigation keys


These are used to manage most of your phone's functions and displays.



Key	Function when key is pressed
	Open the idle menu → Page 18 or browse back in the menu.
	Perform action.
	Open the idle menu → Page 18 or browse forward in the menu.

## Programmable function keys

Your **OpenStage 15/15G** has eight illuminated keys to which you can assign functions or phone numbers.


 Increase the number of programmable function keys by connecting a key module  
→ Page 15.



Depending on how they are programmed, you can use the keys as follows:

- Function keys → Page 55
- Redial/Direct station selection keys → Page 59

Each key can be programmed with one function.

 The configuration of direct station selection keys must be activated by your administrator.  
Direct station selection keys can be assigned an internal number from the **HiPath 4000** network.




Press the key briefly to activate the programmed function or dial the stored number.

Hold the key to open the key programming menu → Page 55.

Your **OpenStage** is delivered with label strips. Write functions or names in the white fields on the label strips.

The status of a function is shown by the LED display for the corresponding function key.

### Meaning of LED displays on function keys and DSS keys


LED		Meaning of function key	Meaning of DSS key
	Off	The function is deactivated.	The line is free.
	Flashing <sup>1</sup>	Indicates the function status.	The line is busy.
	On	The function is activated.	There is a call on the line.

<sup>1</sup> In this manual, flashing keys are identified by this icon, regardless of the flashing interval. The flashing interval represents different statuses, which are described in detail in the corresponding sections of the manual.

 The programmable keys on multi-line phones function as trunk keys → Page 86.

## Dialpad

In cases where text input is possible, you can use the dialpad to input text, punctuation and special characters in addition to the digits 0 to 9 and the hash and asterisk symbols. To do this, press the numerical keys repeatedly.

Example: To enter the letter "h", press the number  key on the keypad twice.

 To enter a digit in an alphanumeric input field, hold down the relevant key.


Alphabetic labeling of dial keys is also useful when entering vanity numbers (letters associated with the phone number's digits as indicated on the telephone spell a name, e.g. 0700 - PATTERN = 0700 - 687837).

## Display



Your **OpenStage 15/15G** comes with a black-and-white LCD display. Adjust the contrast to suit your needs → Page 104ff.

## Idle mode

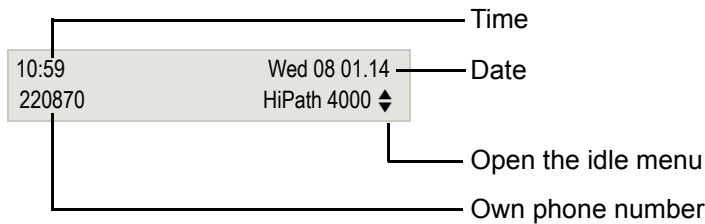Your phone is in idle mode when there are no calls taking place or settings being made. Example:



## Idle menu

In idle mode press the  or  key on the 3-way navigator → Page 16 to display the idle menu. You can call up various functions here. The idle menu includes selected functions from the Program/Service menu → Page 21.

The idle menu may contain the following entries:

- Caller list
- Forwarding on
- Lock phone
- DND on<sup>1</sup>
- Advisory msg. on
- Ringer cutoff on
- Send message
- View sent message<sup>2</sup>
- View callbacks<sup>3</sup>
- Phonebook (system phonebook)
- HF answerback on
- Suppress call ID
- Waiting tone off
- DISA internal

1. Must be activated by the administrator.

2. Only appears when there are messages that the recipient has not yet viewed.

3. Only appears if callback requests are saved.


## Mailbox

Depending on the type and configuration of your communication platform (consult the relevant administrator), messages from services, such as HiPath Xpressions, are displayed in this application in addition to messages received.

## Messages


You can send short text messages to individual internal stations or groups.

In idle mode (→ Page 18) the following signals alert you to the presence of new messages:


-  key LED lights up
- "Messages received" is displayed.

Press the mailbox key .

Example:

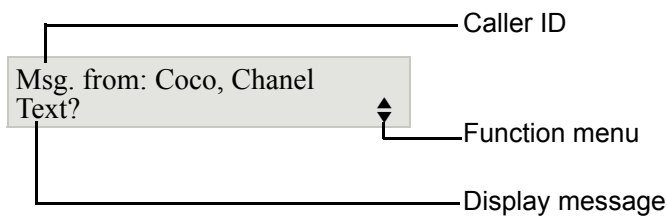

---

 For a description of how to edit the entries → Page 70.

---

## Voicemail

If your telephone is connected to a voicemail system (such as Entry Voice Mail), the Mailbox key will also light up to alert you to any messages that have arrived.

An appropriate message also appears on the display (for instance, in Entry Voice Mail: „X new messages“).

To listen to your voicemail, follow the instructions on the display.

## Caller list

If you are unable to accept an external or internal call, the call attempt is stored in the caller list. Answered calls can also be saved (consult your administrator).

Your telephone stores up to ten calls in chronological order. Each call is assigned a time stamp. The oldest entry not yet deleted in the list is displayed first. Multiple calls from the same caller do not automatically generate new entries in the caller list. Instead, only the most recent time stamp for this caller is updated and its number incremented.

The caller list is automatically displayed → Page 38 in the idle menu → Page 18.


---

|||➔ Callers with suppressed numbers cannot be saved in the call list.

---

Information is displayed regarding the caller and the time at which the call was placed.

Example:

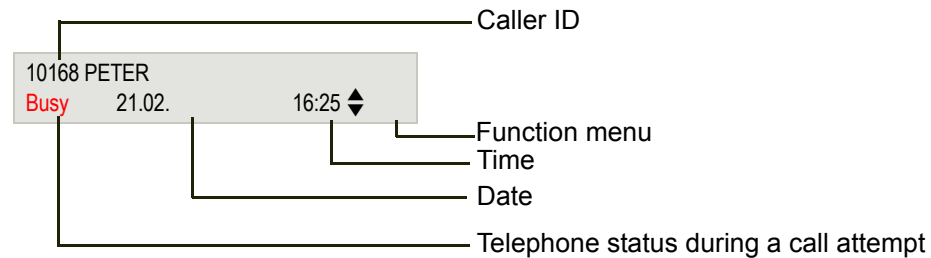


---

|||➔ For a description of how to edit the call lists → Page 38.


---

## Menu

Use the menu key  to access the following options:

- Program/Service menu for your communication system
- Personal (local phonebook)
- Corporate (corporate directory)
- User (local telephone settings for users)
- Administrator (local telephone settings for administrators)

The menu key LED remains red as long as you are in this menu.

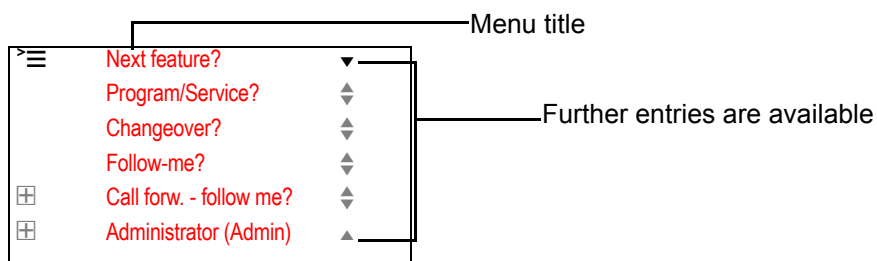

The menu structure comprises several levels. The first line in this structure shows the menu currently selected while the second line shows an option from this menu.

## Control and monitoring function

A control or monitoring function can be activated on your phone for service purposes by remote maintenance.


### Control function

Your administrator has the option to activate and deactivate features of the phone via remote maintenance. During maintenance, the handset, microphone, loudspeaker and headset are deactivated. You are additionally informed on the display that the control function is active.

### Monitoring function

In order to detect malfunctioning of a phone, for example, your administrator can install a monitoring function. You can use your phone as normal during monitoring. However you will first be informed about the operation with a message on the display and prompted to allow monitoring.


## Basic functions

 Please read the introductory chapter "Getting to know the **OpenStage**" → Page 13 carefully before performing any of the steps described here on your phone.

### Accepting a call

Special default ring signaling is set for your telephone:

- When you receive an internal call, your telephone rings once every four seconds (single-tone sequence).
- When you receive an external call, your telephone rings twice in rapid succession every four seconds (dual-tone sequence).
- When you receive a call from the entrance telephone, your telephone rings three times in rapid succession every four seconds (triple-tone sequence).
- If a call is waiting, you hear a short tone (beep) every six seconds.

 Your administrator can adjust the ring cadence for external and internal calls for you. In other words, different ring cadences can be set for different internal callers.



The number or the name of the caller appears on the display.

### Accepting a call via the handset

The phone rings. The caller appears on the screen<sup>1</sup>.

Lift the handset.

Raise or lower the volume. Keep pressing the key until the desired volume is set.

1. Pay attention to the notes on voice encryption → Page 63.





## Accepting a call via the loudspeaker (speakerphone mode)

### Suggestions for using speakerphone mode:

- Tell the other party that you are using speakerphone mode.
- The speakerphone works best at a low receiving volume.
- The ideal distance between the user and the telephone in speakerphone mode is about 50 cm (approx. 20 inches).

The phone rings. The caller appears on the screen<sup>1</sup>.

Press the key shown. The LED lights up.

if nec  or  Raise or lower the volume. Keep pressing the key until the desired volume is set.




### Ending the call

Press the key shown. The LED goes out.

## Switching to speakerphone mode

**Prerequisite:** You are conducting a call via the handset.

Hold down the key and replace the handset. Then release the key and continue the call.




   
if nec  Adjust the call volume. Keep pressing the key until the desired volume is set.

### U.S. mode

If the country setting is set to U.S. (consult your administrator), you do not have to hold down the loudspeaker key when replacing the handset to switch to speakerphone mode.

Press the key shown.



Replace the handset. Proceed with your call.

  
  
if nec  Adjust the call volume. Keep pressing the key until the desired volume is set.

## Switching to the handset

**Prerequisite:** You are conducting a call in speakerphone mode.

Lift the handset. Proceed with your call.

 and 

1. Pay attention to the notes on voice encryption → Page 63.

## Open listening in the room during a call

You can let other people in the room join in on the call. Let the other party know that you have turned on the speaker.

**Prerequisite:** You are conducting a call via the handset.

### Activating



Press the key shown. The LED lights up.

### Deactivating



Press the key shown. The LED goes out.

## Making calls

### Off-hook dialing



Lift the handset.



Internal calls: Enter the phone number.

External calls: Enter the external code and the phone number<sup>1</sup>.

### The called party does not answer or is busy:



Replace the handset.

### On-hook dialing



Internal calls: Enter the phone number.

External calls: Enter the external code and the phone number<sup>1</sup>.



Your system may also be programmed so that you have to press the "internal" key before you dial the internal number.

You then do not have to enter an external code to call the external party (automatic trunk seizure/prime line is not active; consult your administrator).

### The other party answers with speaker:



Lift the handset.

or

On-hook dialing: Speakerphone mode.

### The called party does not answer or is busy:



Press the key shown. The LED goes out.

1. Pay attention to the notes on voice encryption → Page 63.

## Dialing with redial keys

**Prerequisite:** You have saved a number on a redial key → Page 59.

Press the key with the saved number.

If the number is saved at the second level, press the "Shift" key first<sup>1</sup>.



You can also press the redial key during a call and automatically initiate a callback → Page 27.

## Redialing a number

The last ten external phone numbers dialed are stored automatically.



If this feature is configured (consult your administrator), account codes entered are also saved → Page 61.

You can redial them simply by pressing a key.

## Displaying and dialing saved station numbers

**Prerequisite:** The "Redial" key is configured.

Press the "Redial" key.

Keep confirming until the phone number you want appears.

Select and confirm the option shown<sup>1</sup>.

## Ending a call

Press the illuminated key.

Replace the handset.

Next?

Call?



or

\

1. Pay attention to the notes on voice encryption → Page 63.

## Rejecting calls

You can reject calls you do not wish to take. The call is then signaled on another definable telephone (consult your administrator).

**Prerequisite:** The "Release" key is configured. The phone rings. The caller appears on the screen.

Press the "Release" key.

If a call cannot be rejected, your telephone will continue to ring. The message "currently not possible" is displayed (e.g. in the case of recalls).

## Turning the microphone on and off

To prevent the other party from listening in while you consult with someone in your office, you can temporarily switch off the handset microphone or the handsfree microphone. You can also switch on the handsfree microphone to answer an announcement via the telephone speaker (speaker call, → Page 34).

**Prerequisite:** A connection is set up, the microphone is activated. The "Microphone" key is configured

Press the "Microphone" key. The microphone is switched off.

or

Press the illuminated "Microphone" key. The microphone is switched on.

Consultation?



Return to held call?

or

Quit and return?

Toggle/Connect?

Conference?

Leave conference?

Consultation?



or

Transfer?

## Calling a second party (consultation)

You can call a second party while a call is in progress. The first party is placed on hold.

Confirm the option shown.

Call the second party<sup>1</sup>.

**Return to the first party, the second party does not answer:**

Confirm the option shown.

**End the consultation:**


Select and confirm the option shown.

## Switching to the held party (alternating)

Select and confirm the option shown<sup>1</sup>.


## Combining the call parties in a three-party conference

Select and confirm the option shown.

 If voice encryption is not activated or not available on a conference party's phone, the entire conference is not secure. It may be indicated that the call is not secure → Page 63.

## Leaving a conference

Select and confirm the option shown.

 For more information on conferences, see → Page 50.

## Transferring a call

If the person you are speaking to wants to speak to another colleague of yours, you can transfer the call to that colleague.

Confirm the option shown.

Enter the number of the party to whom you want to transfer the call.

Announce the call, if necessary.

Replace the handset.

Select and confirm the option shown<sup>2</sup>.

1. Pay attention to the notes on voice encryption → Page 63.  
2. "Differing display views in a HiPath 4000 environment" → Seite 111

## Forwarding calls

### Using variable call forwarding

You can immediately forward internal or external calls to different internal or external telephones (destinations). (External destinations require special configuration in the system.)

▶ When call forwarding is active, a special dial tone sounds when you lift the handset.

If DID DTMF is active (consult your administrator), you can also forward calls to this destination. Destinations: Fax = 870, DID = 871, Fax-DID = 872.

If you are a call forwarding destination, your display will show the number or the name of the originator on the upper line and that of the caller on the lower line.

▶ Special features must be taken into consideration if your telephone operates with system networking via LAN → Page 100!

If configured: Press the "Forwarding" key.

Open the idle menu → Page 18.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the destination number.

Confirm the option shown.


The call forwarding symbol as well as the phone number and possibly also the forwarding destination name are displayed.

### Deactivating call forwarding

If configured: Press the "Forwarding" key.

Open the idle menu → Page 18.

Select and confirm the option shown.

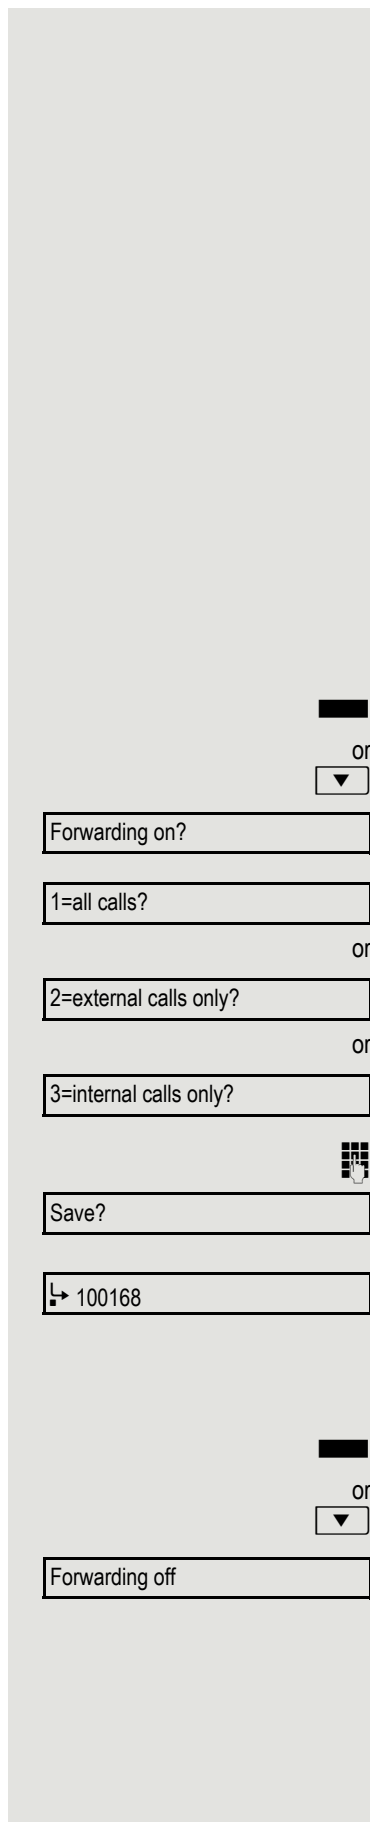

## Using call forwarding no reply (CFNR)

Calls that are not answered after three rings (=default, can be adjusted by administrator) or that are received while another call is ongoing can be automatically forwarded to a specified telephone.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the destination number.

- Enter the internal station number for internal destinations
- Enter the external code and the external station number for external destinations

Confirm the option shown.

## Deactivating call forwarding no reply

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm to return to idle mode and not deactivate call forwarding.



If CFNR is activated, "CFNR on" appears briefly on the display after you hang up.



## Call forwarding in the event of telephone failure (CFSS)

If configured (consult your administrator), you can define an internal or external call forwarding destination that activates in the event of telephone failure.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the destination number.

Confirm the option shown.

### Deactivating call forwarding/deleting a destination:

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Confirm to deactivate and delete the forwarding destination.

Select and confirm to return to idle mode and not deactivate call forwarding.

### Changing the forwarding destination (if call forwarding is active):

Open the menu → Page 21.

Select and confirm the option shown.

Enter the code.

Confirm the option shown.

Change the destination phone number.

Confirm the option shown.

The screenshot shows a vertical sequence of menu screens. Each screen has a 'Menu' icon (three horizontal lines with a right-pointing arrow) in the top right corner. The screens are as follows:

- Screen 1: A dropdown menu with 'Program/Service?' and a downward arrow.
- Screen 2: A text field containing '\*9411= CFSS on?'.
- Screen 3: A text field containing 'Save?'.
- Screen 4: A dropdown menu with 'Program/Service?' and a downward arrow.
- Screen 5: A text field containing '#9411= CFSS off?'.
- Screen 6: A text field containing 'Delete?'.
- Screen 7: A text field containing 'Exit?'.
- Screen 8: A dropdown menu with 'Program/Service?' and a downward arrow.
- Screen 9: A numeric keypad with a star key (\*), a '9 wxyz' key, a '4 ghi' key, and two '1' keys.
- Screen 10: A text field containing 'Change?'.
- Screen 11: A text field containing 'Save?'.

## Call forwarding in the carrier network and forwarding multiple subscriber numbers (MSN) (not for U.S.)

If this function has been configured (consult your administrator), you can forward calls to your assigned multiple subscriber number (MSN) (DID number) directly within the carrier network.

For example, you can forward your phone line to your home phone after business hours.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the required type of call forwarding.

Select and confirm the option shown.

Select and confirm the option shown.

Enter your DID number.

Enter the destination number (without the external code).

Confirm the option shown.

### Deactivating call forwarding

Select and confirm the option shown.

Confirm the displayed call forwarding type.

Enter your DID number.


## Using callback

You can request a callback if the internal station called is busy or if nobody answers. This also applies for external calls via ISDN exchanges. This feature saves you from having to make repeated attempts to reach the user.

You receive a callback:

- When the other party is no longer busy,
- When the user who did not answer has conducted another call.

---

 When configured (consult your administrator), all callback requests are automatically deleted overnight.

---

## Saving a callback

**Prerequisite:** You have reached a busy line or no one answers.

Confirm the option shown.

## Accepting a callback

**Prerequisite:** A callback was saved. Your telephone rings and the following message appears on the display "Callback: ...".

Lift the handset.



or



or

Press the key shown. The LED lights up.

Callback?

Answer?

Select and confirm the option shown.

You hear a ring tone<sup>1</sup>.

1. Pay attention to the notes on voice encryption → Page 63.

## Viewing and deleting a saved callback

Open the idle menu → Page 18.

Select and confirm the option shown<sup>1</sup>.

Select and confirm to display additional entries.

## Deleting a displayed entry


Confirm the option shown.

## Ending retrieval

Select and confirm the option shown.

Press the key shown. The LED goes out.

Press the key shown. The LED goes out.

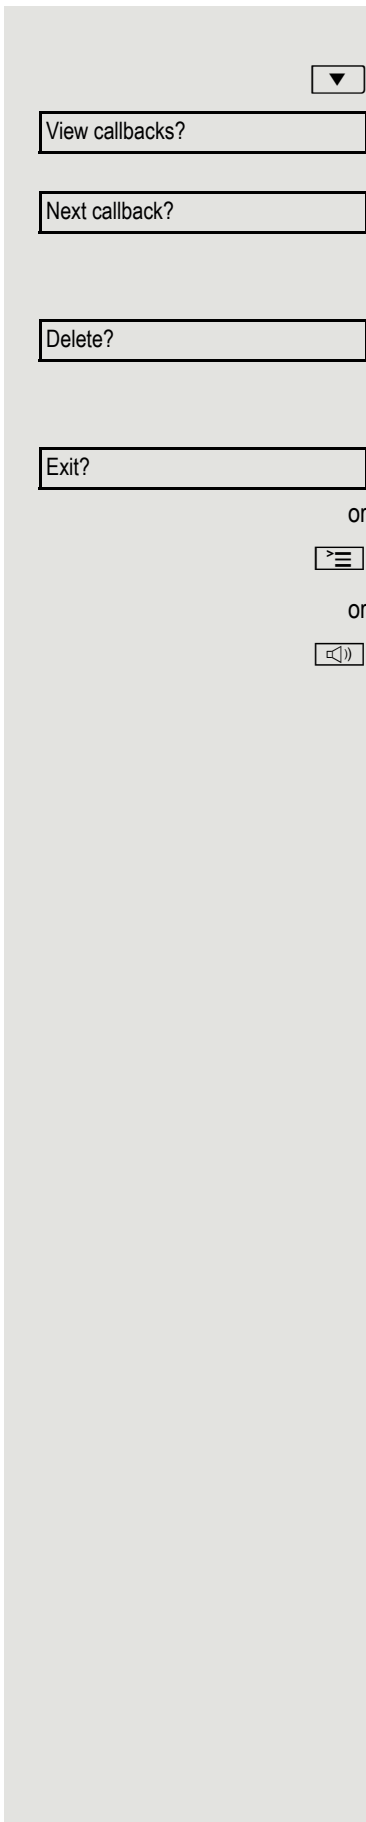

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Enhanced phone functions

### Accepting calls

#### Accepting a specific call for your colleague

You hear another telephone ring.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

Select and confirm until the required station is displayed.

Confirm the option shown.

If you know the number of the telephone that is ringing, enter it directly<sup>2</sup>.

#### Using the speakerphone

A colleague addresses you directly over the speaker with a speaker call. You hear a tone before the announcement. The other party's name or station number appears on the screen. You can conduct the call with the handset or in speakerphone mode.

Lift the handset and answer the call.

Press the "OK" key to confirm your selection and answer the call.



If handsfree answerback is enabled (see below), you do not need to switch on the microphone - you can answer directly. You can answer immediately in speakerphone mode.

If handsfree answerback is disabled (default setting), follow the procedure described above. Placing a speaker call to a colleague → Page 43.

#### Enabling and disabling handsfree answerback


Open the idle menu → Page 18.

Select and confirm the option shown.

Select and confirm the option shown.

1. "Differing display views in a HiPath 4000 environment" → Seite 111

2. Pay attention to the notes on voice encryption → Page 63.

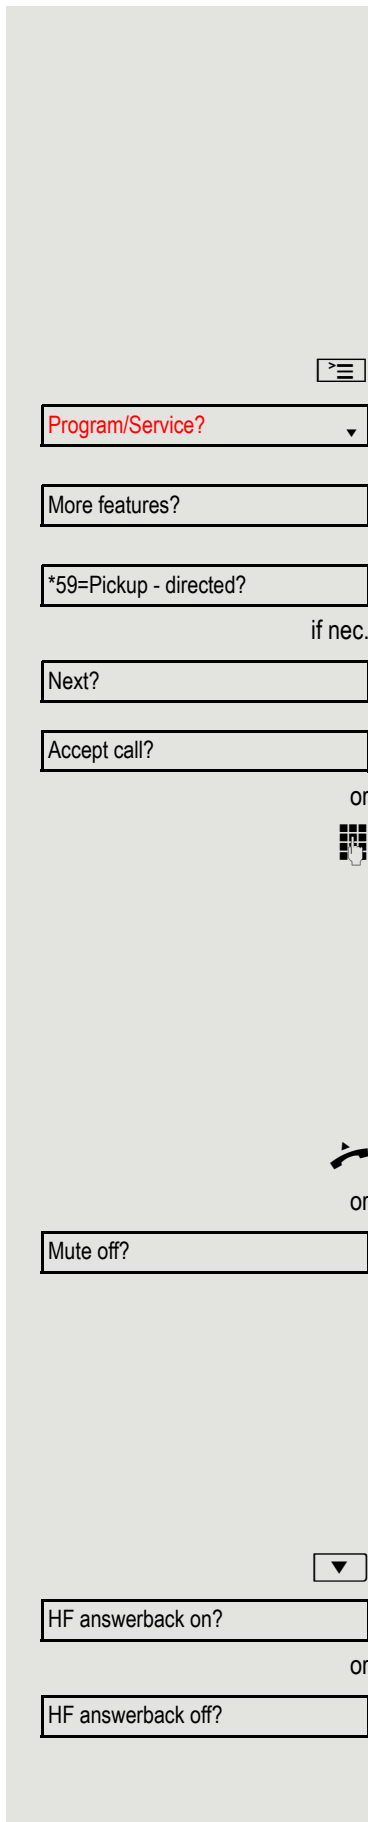

## Answering calls from the entrance telephone and opening the door

If an entrance telephone has been programmed, you can use your telephone to speak to someone at the entrance telephone and to activate a door opener. If you have the proper authorization (consult your administrator), you can activate the **door opener**, enabling visitors to open the door themselves by entering a 5-digit code (e.g. using a DTMF transmitter or the keypad installed).

### Speaking to visitors via the entrance telephone

**Prerequisite:** Your telephone rings.

Lift the handset within thirty seconds. You are connected to the entrance telephone immediately.



or



Lift the handset after more than thirty seconds.



Dial the entrance telephone number.

### Opening the door from your telephone during a call from the entrance telephone

Confirm the option shown.

Open door?

### Opening the door from your telephone without calling the entrance telephone

Open the menu → Page 21.



Program/Service?

Select and confirm the option shown.

\*61=Open door?

Select and confirm the option shown.



Dial the entrance telephone number.




Special features must be taken into consideration if your telephone operates with system networking via LAN → Page 103!

### Opening the door with a code (at the door)

After ringing the bell, enter the five-digit code (using the keypad or a DTMF transmitter). Depending on how the door opener has been programmed, a doorbell call signal may or may not be forwarded.



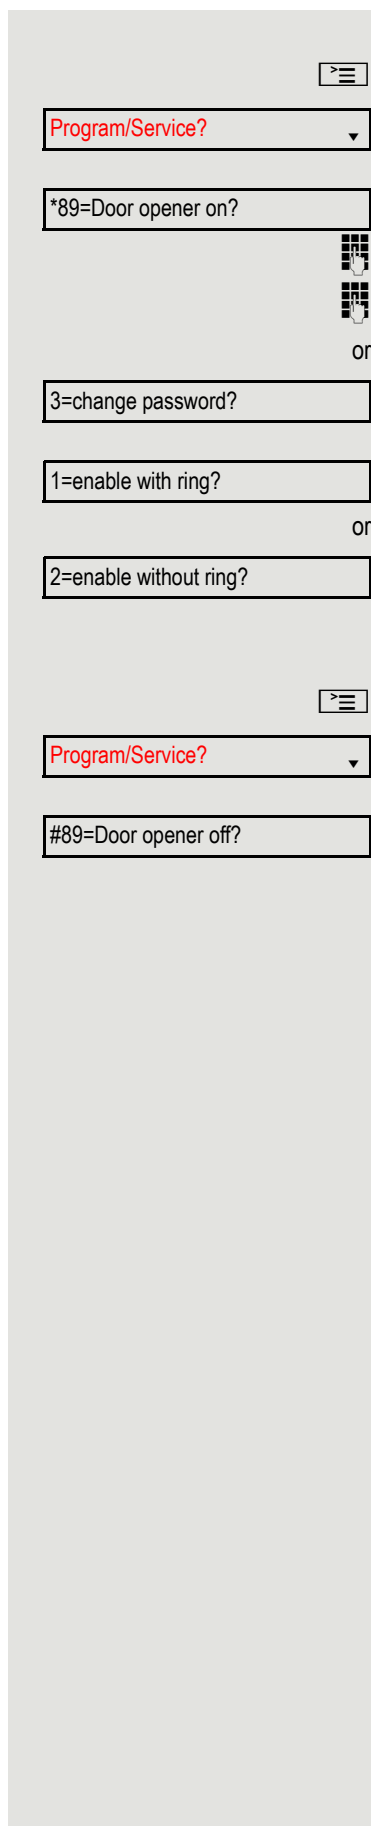

### Activating the door opener

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Dial the entrance telephone number.

Enter the five-digit code. Default code = "00000".

Select the displayed function and press "OK" to change the code.

Select and confirm the option shown.

You can also open the door without a doorbell ring.

### Deactivating the door opener

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

## Making calls

### En-bloc sending/correcting numbers

If this feature is configured (consult your administrator), a connection is not attempted immediately when a station number is entered. This means that you can correct the number if necessary.

The station number is only dialed at your specific request.

Internal calls: Enter the phone number.


External calls: Enter the external code and the phone number.

### Dialing entered/displayed numbers

Lift the handset.

Confirm the option shown<sup>1</sup>.

### Correcting numbers entered

 A station number can only be corrected as it is being entered. Station numbers stored for number redial, for example, cannot be corrected.

Select and confirm the option shown.

The last digit entered in each case is deleted.

Enter the required digit(s).

### Canceling en-bloc sending

Select and confirm the option shown.

Press the key shown. The LED goes out.



or

Call?

Delete number?



Cancel?

or



1. Pay attention to the notes on voice encryption → Page 63.



## Using the caller list

Detailed information as well as a sample display entry are provided on → Page 20.

### Retrieving the caller list

**Prerequisite:** Your administrator has set up a caller list for your telephone.

Open the idle menu → Page 18.

Confirm the option shown<sup>1</sup>.

The latest entry is displayed, see the example on → Page 20.

To view other calls, confirm each subsequent display.

### Ending retrieval

Select and confirm the option shown.

Press the key shown. The LED goes out.

Press the key shown. The LED goes out.


### Displaying the call time

**Prerequisite:** You have retrieved the caller list and the selected call is displayed → Page 20.

Select and confirm the option shown.

### Dialing a station number from the caller list


**Prerequisite:** You have retrieved the caller list and the selected call is displayed. Select and confirm the option shown<sup>2</sup>.

 The caller is automatically deleted from the caller list when a connection is finally set up.


### Removing an entry from the caller list

**Prerequisite:** You have retrieved the caller list and the selected call is displayed.

Confirm the option shown.

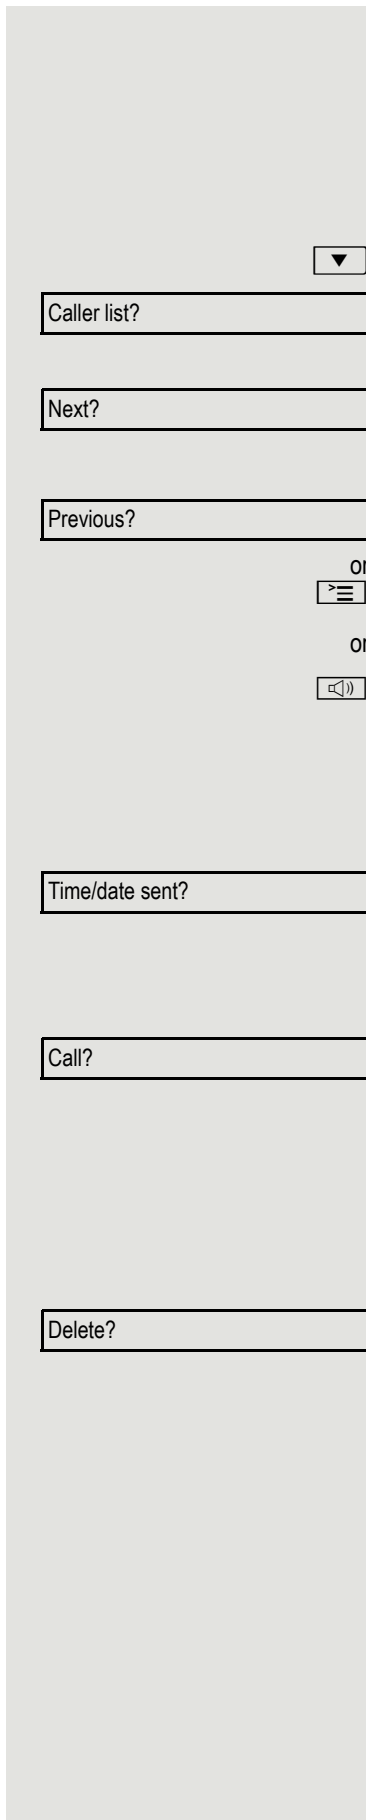

1. "Differing display views in a HiPath 4000 environment" → Seite 111  
 2. Pay attention to the notes on voice encryption → Page 63.

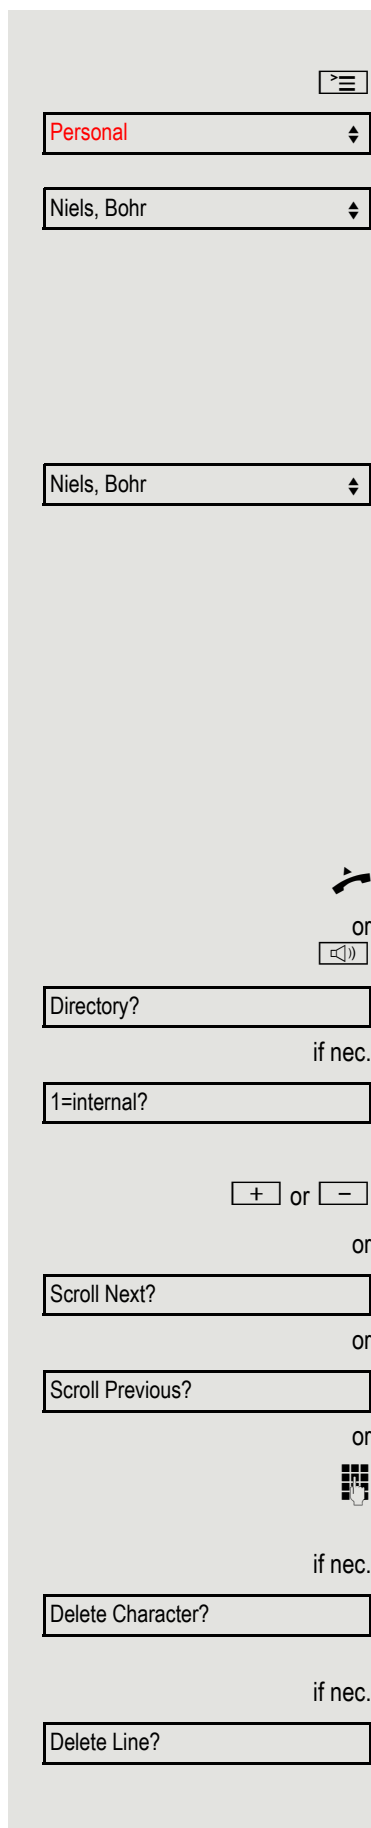

## Calling a subscriber from the personal phonebook

Open the menu → Page 21.

Select and confirm to open the local phonebook.

Select and confirm the relevant entry. The connection is set up (see also → Page 80).

## Calling a subscriber from the corporate directory

**Prerequisite:** You have searched for and selected a subscriber in the corporate directory → Page 83.

Confirm the subscriber. The connection is set up.

## Calling a subscriber from the internal system phonebook

The internal system phonebook of your communication system contains all station numbers and system speed-dial numbers assigned to a name. Consult your administrator to find out if one was configured for your system.

**Prerequisite:** Names have been assigned to the station numbers stored in the system.

Lift the handset.

Press the key shown. The LED lights up.

Confirm the option shown.

If several phonebooks have been configured:

Confirm the option shown.

The first entry is displayed on the screen.

Scroll to next or previous entry.


Select and confirm the option shown.

Select and confirm the option shown.

Enter the name you want to find, or just the first few letters, using the keypad → Page 18.

Select and confirm each letter to be deleted. The last letter entered is deleted. If all letters are deleted, the first entry in the phonebook will be displayed again.

Select and confirm the option shown. All entered letters are deleted and the first entry in the phonebook is displayed again.

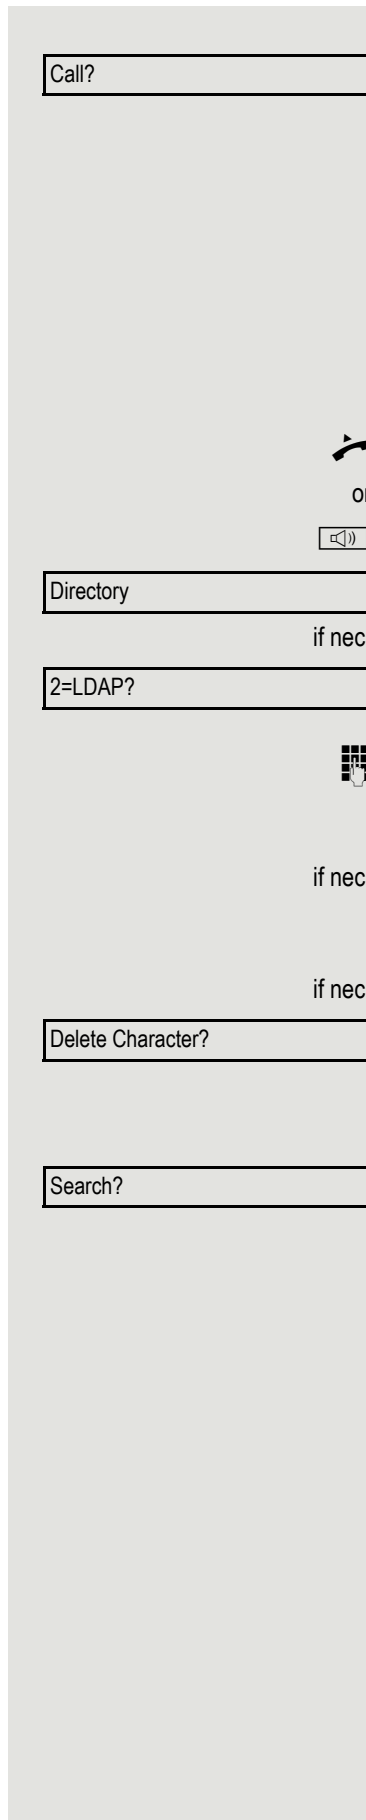

## The entry you wish to dial appears on the screen

Select and confirm the option shown<sup>1</sup>.

## Using the LDAP directory from the system phonebook

If configured (consult your administrator), you can search for directory data in the LDAP database via the system phonebook of the communication system and dial the number of any subscriber you find there.

**Prerequisite:** The LDAP search feature has been configured in the system.

Lift the handset.

Press the key shown. The LED lights up.

Confirm the option shown.

If several phonebooks have been configured in the system:

Select and confirm the option shown.

Enter the name you wish to search for using the keypad (max. 16 characters) → Page 18.

Partial entries are accepted, for example "Mei" for Meier.

If configured (consult your administrator), you can also search for last name and first name. To separate last name and first name by a space, enter "0". Partial entries are accepted, for example "Mei P" for "Meier Peter".

Select and confirm each letter to be deleted. The last letter entered is deleted.



In large databases, the results of the search may be incomplete if too few characters are entered → Page 41.

Confirm the option shown.

The name is searched for. This may take a few seconds.

1. Pay attention to the notes on voice encryption → Page 63.

Call?

or

or

Scroll Next?

or

Scroll Previous?

Call?

Modify search?

or

Show matches?

or

Modify search?

### The result is displayed

If only one name is found, it is displayed.

Confirm the option shown.

If several names are found (max. 50), the first name is displayed.

Scroll to the next or previous entry.

Confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

### If no name is found

If your search does not yield any name corresponding to your query, you can extend the range of the search, for example by deleting characters.

Select and confirm the option shown.

For further procedure, see above.

### If too many names are found

If more than the maximum of 50 names are found corresponding to your query, only an incomplete list of results can be displayed.

You can view these results, select any of the names or change the search (e.g. narrow the search by entering more characters).



In this case it is advisable to narrow down the search so that all corresponding names can be displayed.

Confirm to view the incomplete list.

For further procedure, see above.

Narrow down the search.

Select and confirm in order to change the search.

For further procedure, see above.

1. Pay attention to the notes on voice encryption → Page 63.

## Making calls using system speed-dial numbers

**Prerequisite:** You know the system speed-dial numbers (consult your administrator).

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

Enter a three-digit speed-dial number<sup>2</sup>.

### Suffix dialing

If necessary, you can suffix-dial additional digits (for example, the user's extension) at the end of the saved station number.

If this feature is configured, a suffix is automatically dialed (for example, "0" for the exchange) if no entries are made within 4 or 5 seconds.

## Dialing with speed-dial keys

**Prerequisite:** You have configured speed-dial keys → Page 42.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown<sup>[1]</sup>.

Press the key shown.

Press the required speed-dial key<sup>2</sup>.

### Configuring a speed-dial key

You can program the keys  $\square+$  to  $\square_{wxyz}$  with ten frequently used phone numbers.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown<sup>[1]</sup>.

Confirm the option shown.

Press the key shown.

Press the required speed-dial key. If the key is already in use, the programmed phone number appears on the screen.


Confirm the option shown.


First enter the external code and then the external station number.

Confirm the option shown.

1. "Differing display views in a HiPath 4000 environment" → Seite 111

2. Pay attention to the notes on voice encryption → Page 63.

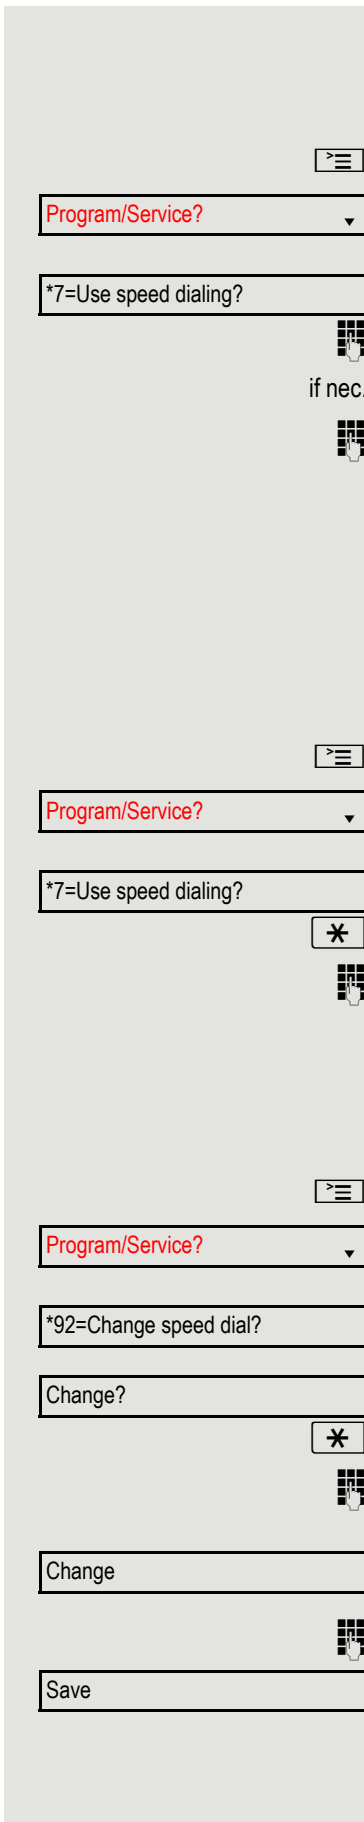

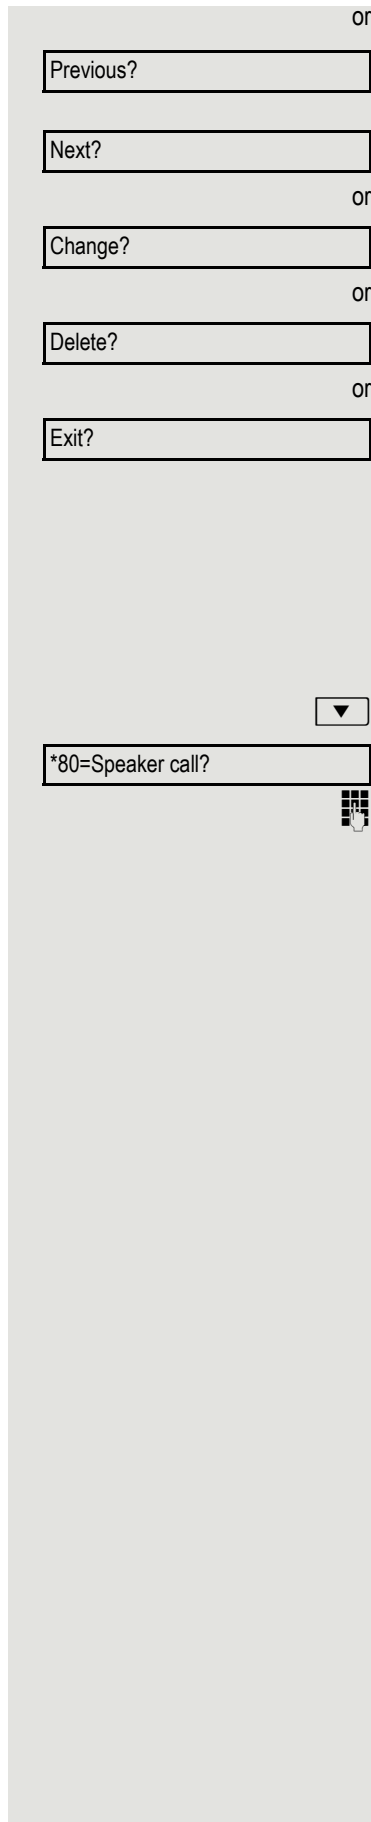

**If you make a mistake:**

Select and confirm the option shown. This deletes all numbers entered.

Confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

**Talking to your colleague with a speaker call**


You can make a speaker announcement through a loudspeaker if connected (consult your administrator) or to an internal user with a system telephone without any action on their part.

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the phone number.

---

 Responding to a speaker call → Page 34.

---

## Talking to your colleague with discreet calling


If this function has been configured (consult your administrator), you can join an ongoing call conducted by an internal user on a system telephone with display. You can listen in unnoticed and speak to the internal user without being overheard by the other party (discreet calling).

Lift the handset.

Enter the code.

Enter your internal station number.

---

 Your administrator can protect your telephone against discreet calling.

---

## Automatic connection setup (hotline)

If this function is configured (consult your administrator), the system automatically sets up a connection to a preset internal or external destination.

Lift the handset.

Depending on the setting, the connection is either set up **immediately** or only **after a preset period of time** (= hotline after a timeout).

## Reserving a trunk

If configured (consult your administrator), you can reserve an occupied line for yourself. When the line is free, you receive a call and a note on the display.

**Prerequisite:** "Currently busy" appears on the display.


Confirm the option shown.

### Reserved line is free:

Your telephone rings. "Trunk is free" appears on the display.

Lift the handset. You will hear the dial tone.

Enter the external phone number.

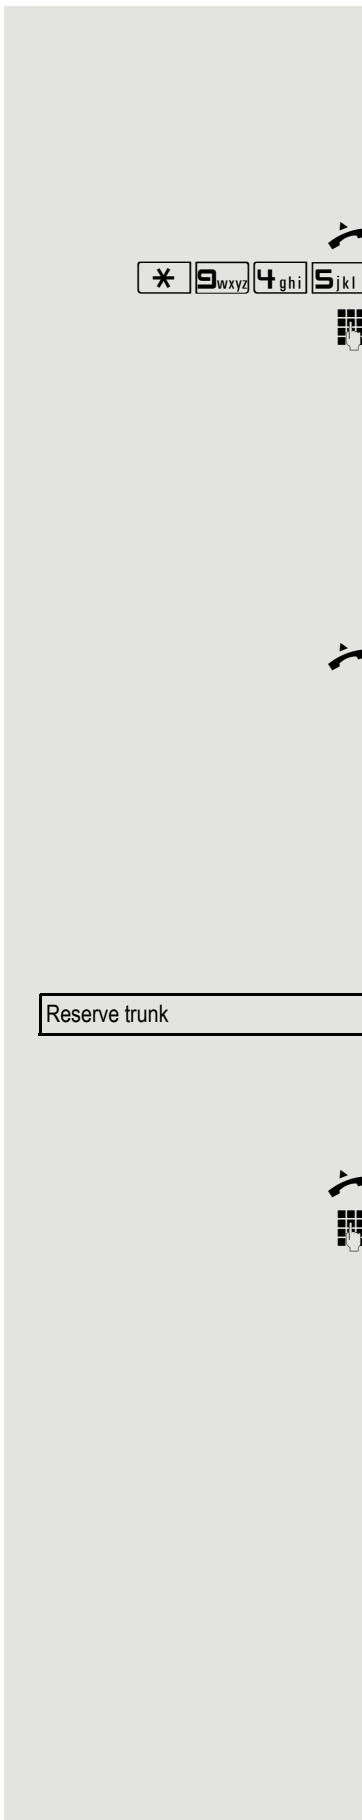

## Assigning a station number (not for U.S.)

If this function has been configured (consult your administrator), you can selectively assign a specific number (DID number) to your telephone before making an external call. The assigned number then appears on the called party's display.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the DID number you wish to use.

Dial the external number.

## Associated dialing/dialing aid

If this function has been configured (consult your administrator), you can use a dialing aid to dial numbers and set up calls for your telephone.

The operating procedure depends on whether the dialing aid is connected to the **S<sub>0</sub> bus** or the **a/b (T/R) port**.

You can also use your system telephone as a dialing aid for other telephones.

### Dialing aid on the S0 bus

On the PC, select a destination and start dialing.

The speaker on your telephone is switched on. Lift the handset when the other party answers.

### Dialing aid at the a/b (T/R) port

On the PC, select a destination and start dialing.

"Lift the handset" appears on the PC screen.

Lift the handset.

### Dialing aid from your telephone for another telephone:

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the internal station number ("Call for:").

Enter the number you wish to dial.





## During a call

### Using call waiting (second call)

Callers can still reach you while you are conducting another call. A signal alerts you to the waiting call.

You can ignore or accept the second call.

When you accept the waiting call, you can either end the first call or place it on hold and resume the call later on.

You can also block the second call or the signal tone → Page 47.

**Prerequisite:** You are conducting a phone call and hear a tone (approx. every six seconds).

### Ending the first call and answering the waiting call

Replace the handset. Your phone rings<sup>1</sup>.

Answer the second call. Lift the handset.

### Placing the first call on hold and answering the second call

Select and confirm the option shown<sup>1</sup>.

You are connected to the second caller. The first party is placed on hold.



### Ending the second call and resuming the first one

Confirm the option shown.

Replace the handset.

Recall the first party.


Lift the handset.


Call waiting?

Quit and return?

or



↩ • 23189 Coco



1. Pay attention to the notes on voice encryption → Page 63.

## Preventing and allowing call waiting (automatic camp-on)

If this function has been configured (consult your administrator), you can prevent or allow a second call → Page 46 from being signaled by automatic camp-on during an ongoing call.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

Select and confirm the option shown.

## Turning the call waiting tone on and off

You can suppress the call waiting tone (approx. every six seconds) for second calls. A single special dial tone then alerts you to the waiting call.

### Activating

Open the idle menu → Page 18.

Select and confirm the option shown.

### Deactivating

Open the idle menu → Page 18.

Select and confirm the option shown.

## Saving a number

You can save your call partner's station number for subsequent redialing from the caller list → Page 38.

**Prerequisite:** You are conducting a call.

Select and confirm the option shown.

The screenshot shows a vertical menu interface with several options:

- A menu icon (three horizontal lines) at the top right.
- A dropdown menu with the text "Program/Service?".
- A text box containing "#490=Call wait.trm.off?".
- The word "or" centered below the text box.
- A text box containing "\*490=Call wait.trm.on?".
- A dropdown arrow icon.
- A text box containing "Waiting tone off?".
- A dropdown arrow icon.
- A text box containing "Waiting tone on?".
- A text box containing "Save number?".

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Parking a call

You can park up to ten internal and/or external calls. Parked calls can be displayed and picked up on another telephone. This feature is useful, for example, if you want to continue a call at another phone.

**Prerequisite:** You are conducting a call.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the number of the park position (0 - 9) and make a note of it. If the park position number you entered is not displayed, it is already in use; enter another one.

## Retrieving a parked call

**Prerequisite:** One or more calls have been parked. The phone is idle.

Open the menu → Page 21.

Select and confirm the option shown.


Select and confirm the option shown<sup>1</sup>.

Enter the park position number you noted earlier.


If the park position number you enter is not in use, you cannot retrieve the call.



If a parked call is not picked up, after a specific period of time the call is returned to the telephone from where it was parked (recall).

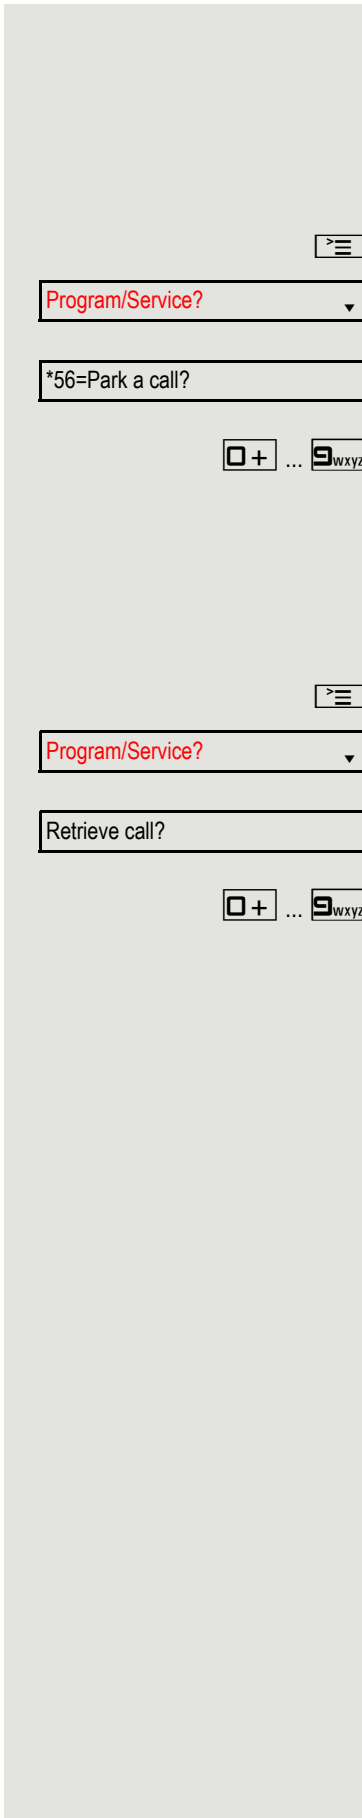

1. "Differing display views in a HiPath 4000 environment" → Seite 111

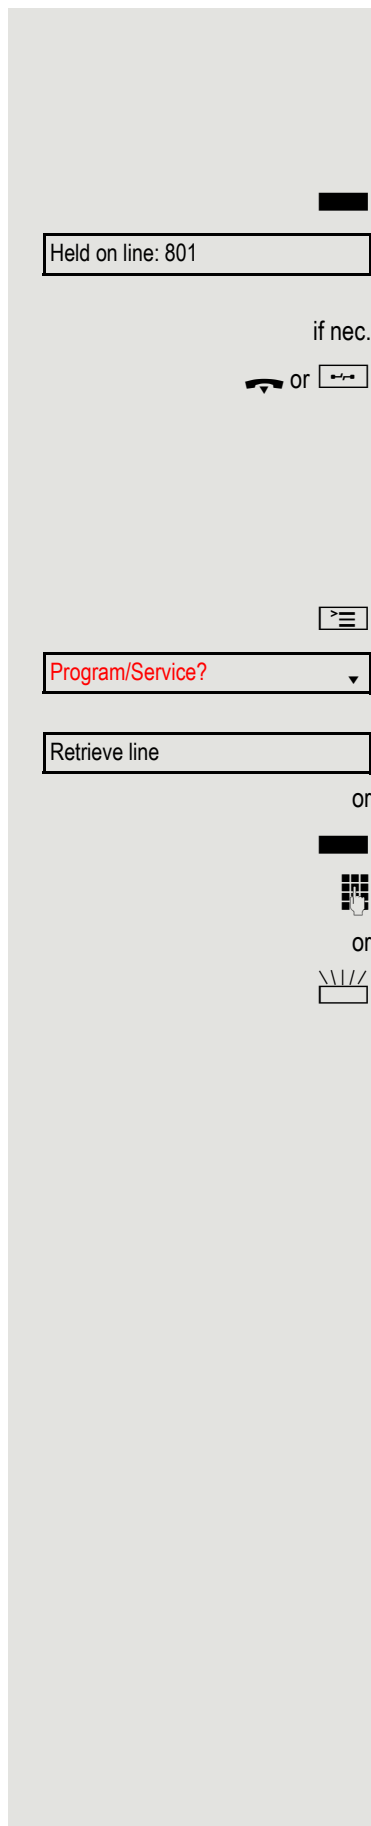

### Holding external calls

If you have programmed a hold key on your phone → Page 55, you can put external calls on hold.

All other stations can then pick up the call on the assigned line.

Press the "Hold" key.

The message of the relevant trunk appears (e.g. 801); note the trunk number. If available, the LED of the assigned trunk key flashes slowly.

Replace the handset or press the key shown.

Depending on the configuration, this may be necessary so other members can also pick up the call on hold.

### Accepting call on hold

**Prerequisite:** One or more calls are on hold. The phone is idle.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

If the "Retrieve" key → Page 55 is available, press it.


Enter the noted trunk number.

If there is a "Line:" key available for the relevant trunk, the LED flashes slowly. Press the key shown.

## Conducting a conference

In a conference call, you can talk to as many as four other parties at the same time. These may be internal or external users.

---

 You can only add parties to or remove them from a conference if you initiated the conference.

---

Call the first party.


Select and confirm the option shown.

Call the second party. Announce the conference.

Select and confirm the option shown.

A tone sounds every 30 seconds to indicate that a conference is in progress (can be disabled, consult your administrator).

---

 If voice encryption is not activated or not available on a conference party's phone, the entire conference is not secure. It may be indicated that the call is not secure → Page 63.

---

### If the second party does not answer


Confirm the option shown.


### Adding up to five parties to a conference

Confirm the option shown.

Call the new party. Announce the conference.

Select and confirm the option shown.

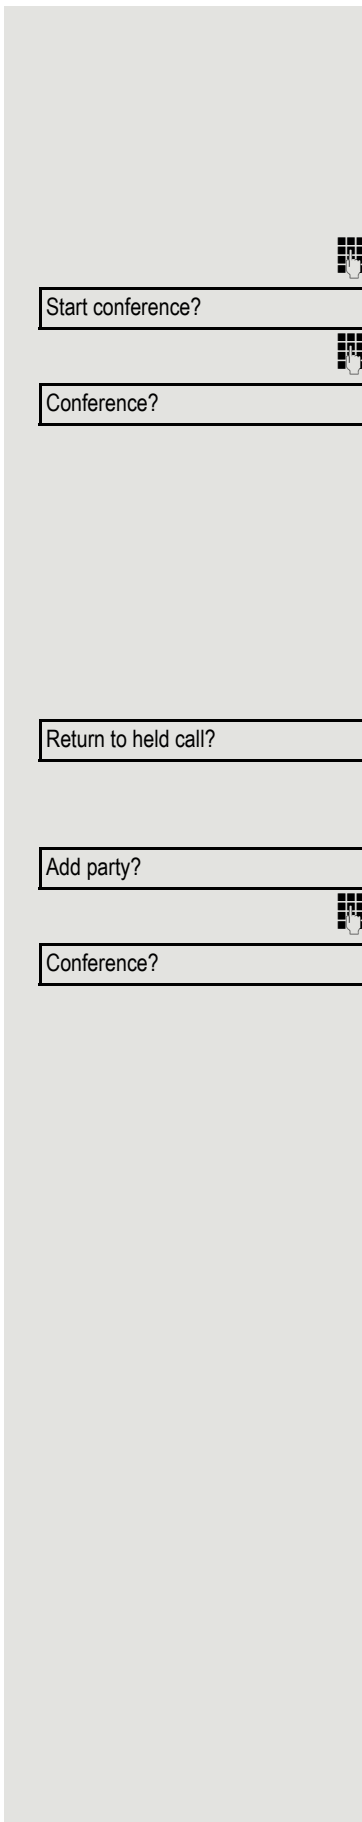

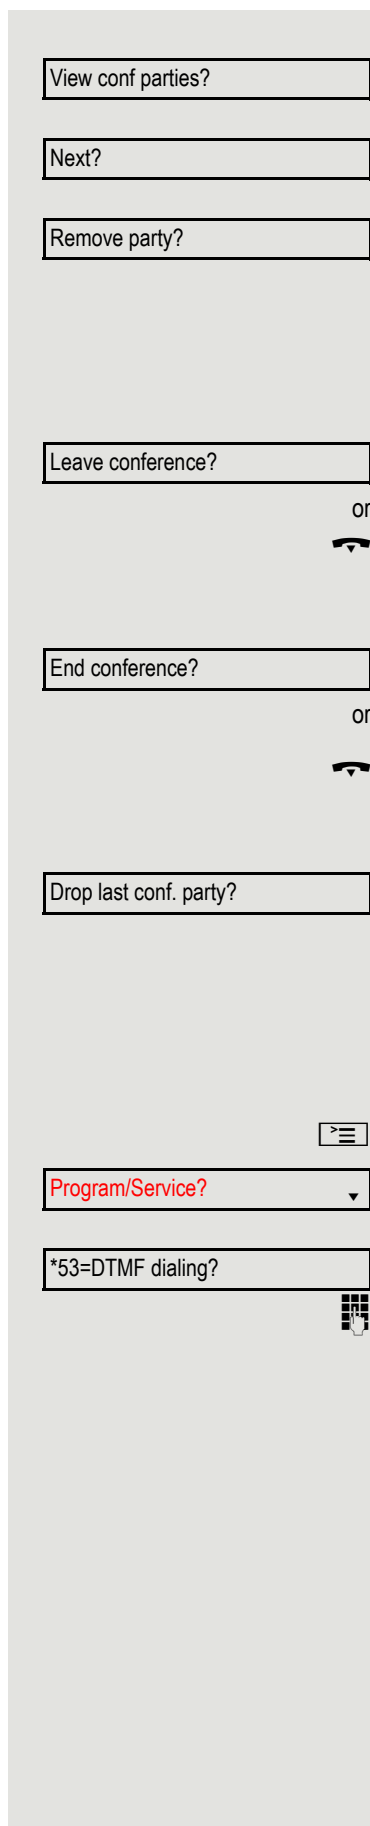


### Removing parties from the conference

Select and confirm the option shown. The first party is displayed.

Confirm as often as required until the desired party appears.

Select and confirm the option shown.

 If a participant who was connected to the conference via an unencrypted line leaves, the conference remains unsecured.

### Leaving a conference

Select and confirm the option shown.

Replace the handset if this feature is configured (consult your administrator).

### Ending a conference

Select and confirm the option shown.

Replace the handset if this feature is configured (consult your administrator).

### Removing the central office party from the conference

Select and confirm the option shown.

### Activating tone dialing/DTMF suffix dialing


You can transmit **dual-tone multifrequency (DTMF)** signals to control devices such as an answering machine or automatic information system.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

You can use the keys  through ,  and  to transmit DTMF signals.

 Ending the call also deactivates DTMF suffix dialing.  
Your system may be configured so that you can start DTMF suffix dialing immediately after setting up a connection.


## Recording a call

If configured (consult your administrator for details), you can record an active call.

**Prerequisite:** You are on a call, the "Recording" key is configured → Page 55.

Press the "Recording" key. The LED lights up.

You and the other party hear an announcement that recording has started and as long as recording is still running, you hear an acoustic signal approx. every 15 seconds.

 During recording, it is not possible to add further call parties.

## Stopping recording

Press the illuminated "Recording" key. The LED goes out.

## Listening to a recording

Playback of the recording depends on the voice recording system used (see the relevant user manual).

## Transferring a call after a speaker call announcement in a group

If this function has been configured (consult your administrator), you can use a speaker call (announcement → Page 43) to announce a call in progress to a group of users → Page 94.

Once a member of the group has accepted the call request, you can transfer the waiting party.

**Prerequisite:** You are conducting a call.

Confirm the option shown. The other party is placed on hold.

Press the key shown.

Select and confirm the option shown.


Enter the group's station number.

Announce the call.

When a member of the group accepts the call → Page 34, you are connected to this party.

Replace the handset.

Select and confirm the option shown<sup>1</sup>.

 If the connection between the two other parties is not established within 45 seconds, the call from the first party returns to you (=recall).

Consultation?



\*80=Speaker call?



or

Transfer?

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Sending a trunk flash

To activate ISDN-type services and features through the network carrier's analog trunks or those of other communication platforms (such as "consultation hold"), you must send a signal to the trunks before dialing the service code or telephone number.

**Prerequisite:** You have set up an external connection.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the service code and/or telephone number.

## If you cannot reach a destination


### Call waiting (camp-on)

**Prerequisite:** You have dialed an internal number and hear a busy signal. It is important that you reach the called party.

Wait (approx. 5 seconds) until "Camp-on" appears on the display and the busy tone is followed by the ring tone.

The called party can then respond → Page 46.

---

 The called party can prevent this automatic call waiting → Page 47.

If this feature is configured (consult your administrator), you will hear the ring tone and the message "Camp-on" is immediately displayed.

---

### Busy override - joining a call in progress

This function is only available if it has been configured (consult your administrator).


**Prerequisite:** You have dialed an internal number and hear a busy signal. It is important that you reach the called party.

Select and confirm the option shown.

The called party and person to whom this party is talking hear an alerting tone every two seconds.

If the called party has a system telephone with display, the following appears on the screen: „Override: (Number or name)".


You can now start talking.

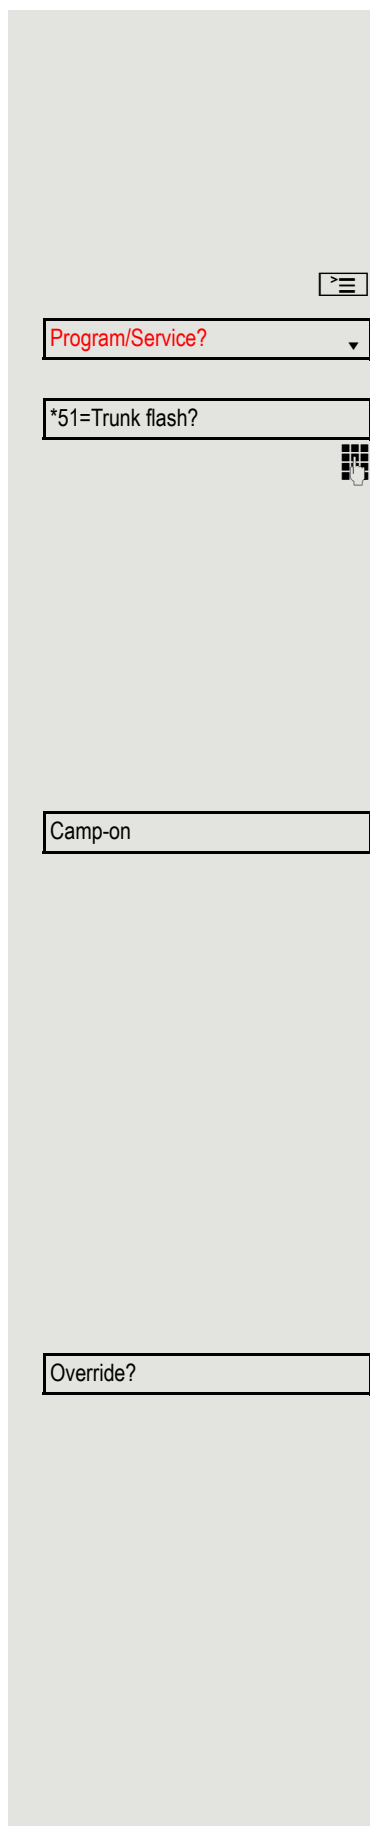



## Using night answer

When night answer mode is active, for example during a lunch break or after office hours, all external calls are immediately forwarded to a specific internal telephone (night station). The night station can be defined by your administrator (= standard night answer service) or by you (= temporary night answer service).

 Special features must be taken into consideration if your telephone operates with system networking via LAN → Page 101!

### Activating

Select and confirm the option shown.

Press the "OK" dialog key to confirm (= standard night answer service).

Enter the code (= standard night answer service).

Enter the destination number (= temporary night answer service).  
Confirm the option shown.

### Deactivating

Select and confirm the option shown.

The administrator can also configure an "automatic night answer service". The automatic night answer service activates at specific times for your telephone depending on how it is programmed.

You can deactivate the automatic night answer service or replace it with a night answer service you configured (see above).

Night answer on?

\*=default?

or

\*

or



Save?


Night answer off?

## Programming the function keys

You can program frequently used functions, station numbers or procedures onto the function keys on your **OpenStage 15** or key module.

### Configuring function keys

See also → Page 17.

 A list of all available functions is displayed, see the overview → Page 56.

#### Example: Programming the Shift key

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Press the key shown.

Confirm the option shown.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.


Some functions (e.g. with "Call forwarding") can be saved even if they are incomplete. This means that when later initiating the function by pressing the button, further inputs are required.

Confirm the option shown.

Select and confirm the option shown.

The label appears automatically and cannot be changed for the Shift key. It can be changed for all other functions.

The LED displays show the status of the function → Page 17 and → Page 56.

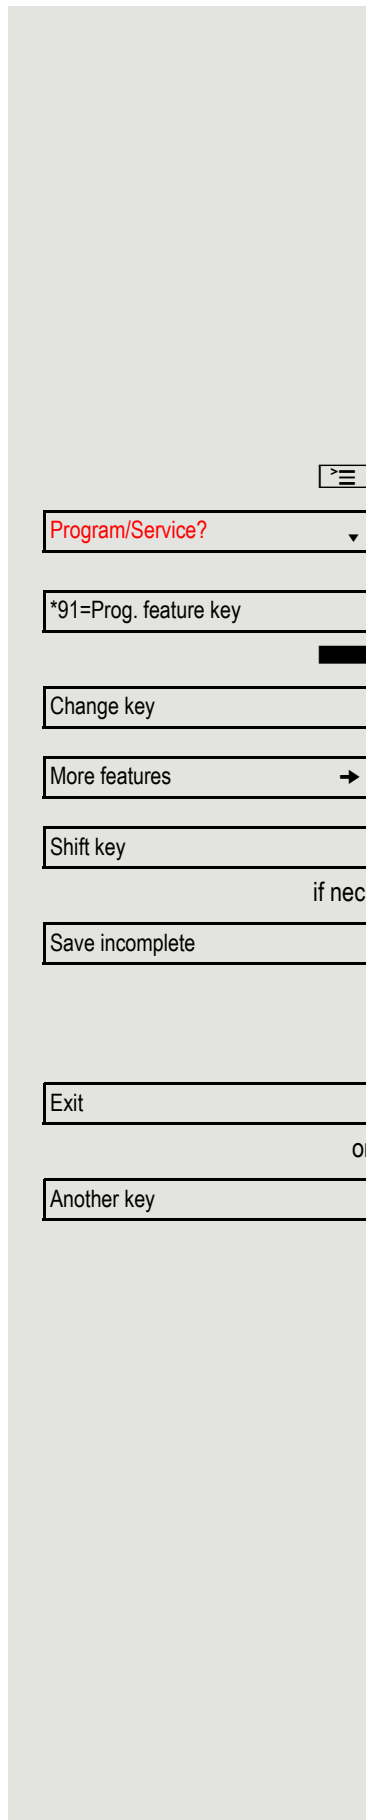

## Overview of functions

The functions are split into the following menus:

- Destinations
- Control Relay
- PIN and Authorization
- Calls
- More Features



The available functions depend on your configuration. If a function is missing, consult your administrator.

## Saved function LED messages

**Call forwarding, Forwarding - trunk, Forward line, Night answer, Do not disturb, Telephone lock, Advisory message, Ringer cutoff, HF answerback on/off, Join/leave group, Caller ID suppression, Call wait.trm., Waiting tone off, Ring transfer, Recording, Door opener on/off, Control relay (only for HiPath 3000), Ringing group on, Shift key, UCD (Available on/off, Work on/off), Night answer on/off, MULAP privacy release:**



Saved function is not activated.



Saved function is activated.

### Callback:



You have no entry for callback.



You have an entry for callback.

### Redial key (internal), Direct station select:



Party not on a call.



Party is on a call or has activated DND.



Flashing quickly - I'm being called, please accept.

Flashing slowly - another party is being called and has not yet accepted the call.

### Call key, General call key, Trunk key, MULAP key, Temporary MSN:



No call via corresponding trunk.



Active call via the corresponding trunk.



Flashing quickly - call on the corresponding trunk, call pickup is possible by pressing the key.

Flashing slowly - a call is placed on hold on the relevant trunk.

**Trunk group key:**

At least one trunk is free.



All lines in this trunk group are occupied.

**View call charges:**

No chargeable calls have been set up since the last check.



Chargeable calls have been set up since the last check.

**Call forwarding, Forward line:**

Flashing slowly - your line is a call forwarding destination.

**Fax/answering machine details:**

No fax received or no message on the answering machine.



Fax received or message on the answering machine.

**View the number of calls:**

No waiting callers.



Flashing quickly - callers waiting (certain number is exceeded).

Flashing slowly - callers waiting (certain number is reached).

**Data I/O service:**

No connection to an application.



Active connection to an application.



Flashing slowly - connection to an application is temporarily interrupted.

**The following functions programmed on keys do not have a LED function:**

Redial key (external), Procedure key, Trace call, Speed dial, Clear, Lock all phones, Send message, Directory (1=internal, 2=LDAP), Call waiting, Toggle/Connect, Conference, Speaker call, Retrieve line, Reserve trunk, Release trunk, Temporary phone, Override, Park a call, Pickup - directed, Pickup - group, Account code, Show call charges, Page, Answer page, Timed reminder, Open door, DTMF dialing, Recall key, Room monitor, Hold key, Consult internal, Consultation, Associated dial, Associated serv., Tel. data service, Mobile login, Discreet call.

## Programming a procedure key

Numbers and functions that require further input, i.e. which contain several operating steps, can be saved on a key on your telephone. The relevant administrator must have granted the appropriate authorization.

For example the function "Associated dialing" → Page 45 together with the required input (phone number of the phone for which the call is to be made + phone number to be dialed) can be saved on a key. Numbers that require further input can also be saved.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Press the key shown.

Confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Enter procedure. Example: **\*67 231 123456**

Code for associated dialing

Number of the phone for which the call should be made

The number to be dialed.

Press the "Pause" key to enter pauses (a "P" appears on the display).


Confirm the option shown.

**If you make a mistake:**


Select and confirm the option shown. This deletes all numbers entered.

Confirm the option shown.

Select and confirm the option shown.

 Select the saved procedure by pressing the key. Procedures with activatable/deactivatable functions are activated by pressing the key once and deactivated by pressing it again.

You can press the procedure key during a call to automatically send the saved digits as DTMF signals → Page 51. For display messages when saving procedures, see → Page 115.

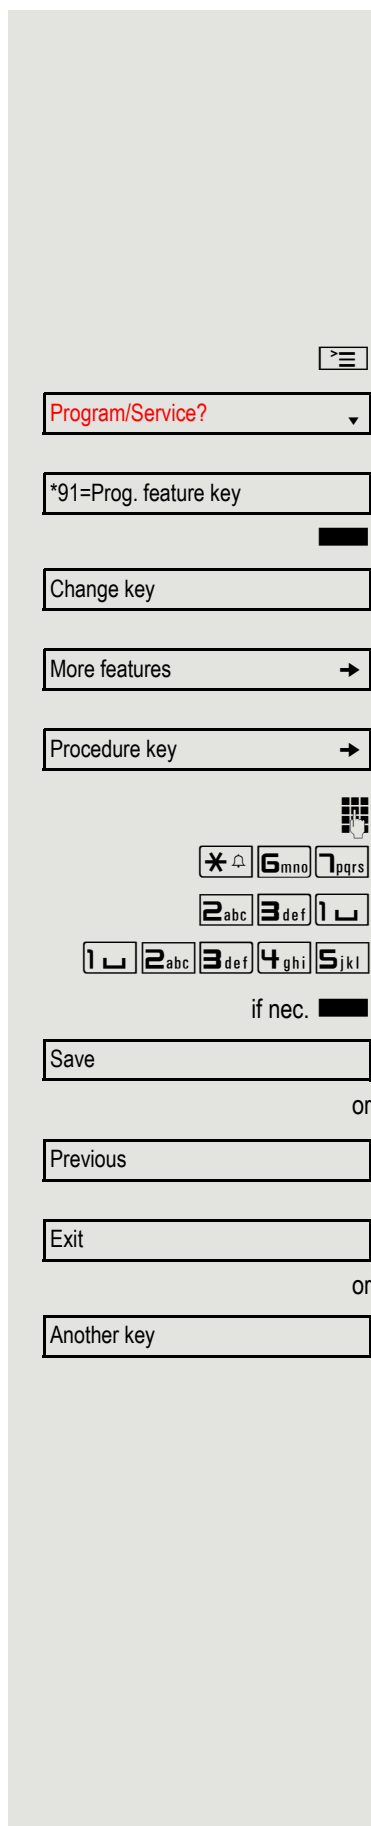

## Configuring redial keys

You can also program internal and external station numbers at the second level. The LED function is not available for internal station numbers at the second level. A "Shift" key → Page 55 has to be configured in order to program the second level.

See also → Page 17.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Press the key shown.

Confirm the option shown.

Select and confirm the option shown.

Confirm the option shown.

Confirm the option shown.

Enter the phone number.


**If you make a mistake:**

Select and confirm the option shown. This deletes all numbers entered.

Confirm the option shown.

Select and confirm the option shown.

---

 You dial the saved number by pressing the key → Page 25.

You can also save a number during a call.

---

## Deleting function key programming


Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Press the key shown.

Select and confirm the option shown.

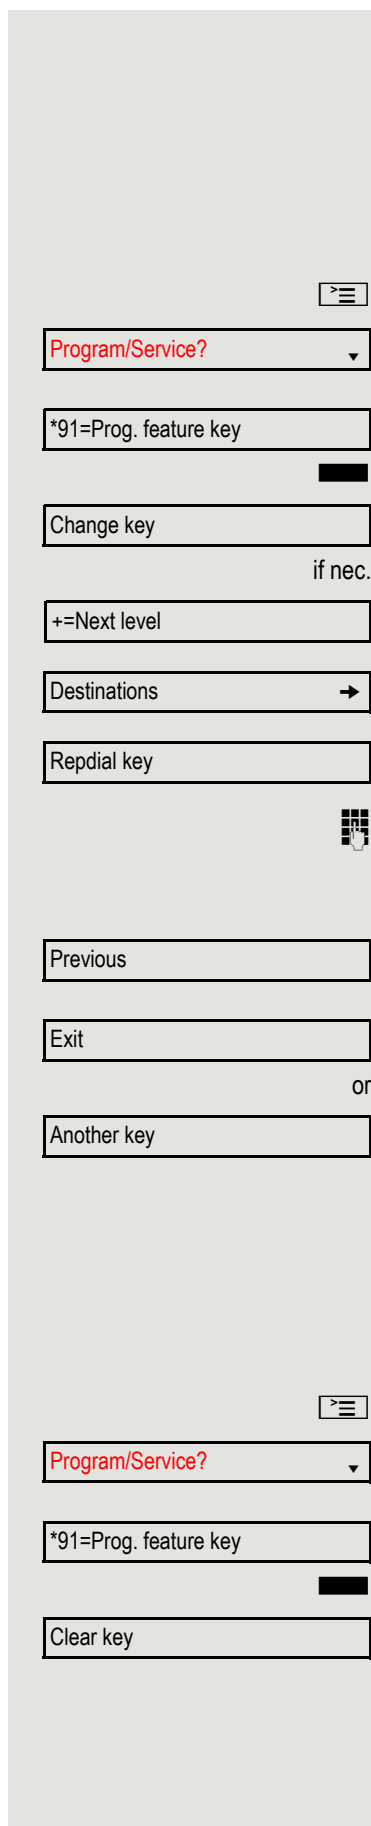

## Displaying and assigning call charges

### Displaying call charges (not for U.S.)

#### For the current call:

Call charges are shown by default on the display when a call ends.

If you want to display call charges as they occur during a chargeable call, your administrator must request this option from the network operator.

Call charge display must be requested from the network operator and configured by the relevant administrator.

Depending on the setting, call charges are displayed during or after a call.

Depending on the network operator, free external calls are also displayed. The message "Free of Charge" appears on the screen either before or during the call.

If the cost indication facility has not been installed, the display will show the dialed number and/or the duration of the telephone call.



If a call is forwarded, call charges are assigned to the destination of the call transfer operation.

#### For all calls and for the last call

Connection charges for the last chargeable call made are displayed first. After five seconds, the accumulated connection charge (total) is displayed.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

### Displaying call charges for another telephone (not for U.S.)

If configured (consult your administrator), you can also display and print information on chargeable calls for other phones (such as a pay phone).

**Prerequisite:** You have programmed the function "Show call charges" on a key → Page 55.


The LED lights up to indicate that you have conducted a chargeable call since the last time you viewed the charges.

Press the "Call Charges" key. Chargeable calls are displayed.

Press to display further chargeable calls.


Select and confirm the option shown.

Select and confirm the option shown.



or

1. "Differing display views in a HiPath 4000 environment" → Seite 111

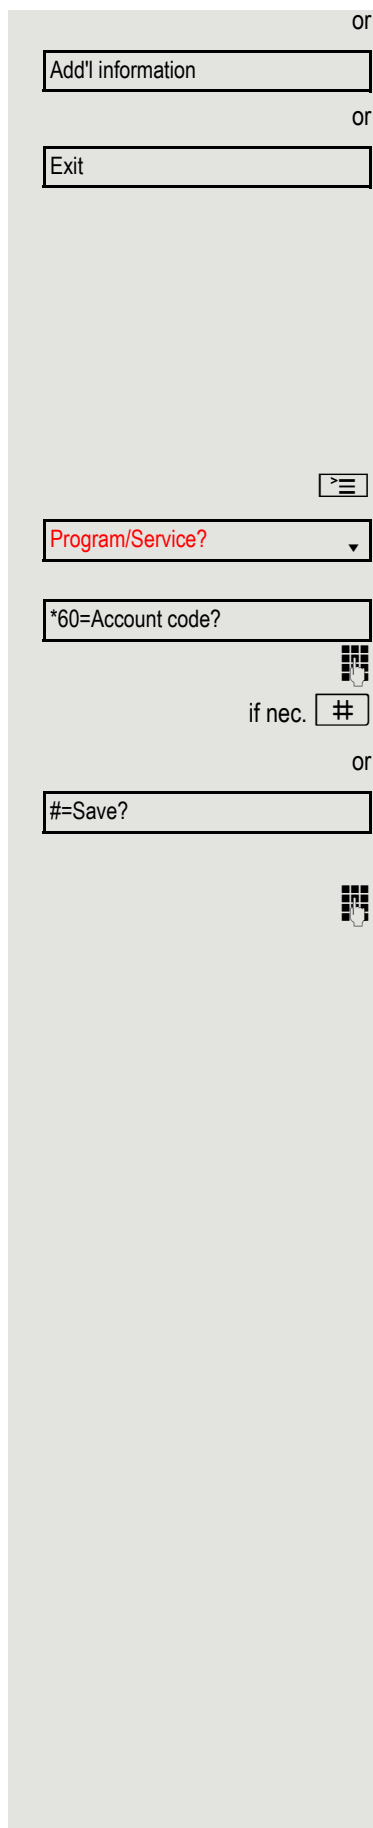

Select and confirm the option shown.

Select and confirm the option shown.

## Dialing with call charge assignment

You can assign external calls to certain projects.

**Prerequisite:** Your administrator has defined account codes for you.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the account code.

Press this key.

Confirm the option shown.

Required depending on the configuration; consult your administrator.

Enter the external phone number.

---


 You can also enter the account code during an external call.

---



## Privacy/security

### Voice encryption

 Please see also the explanations on → Page 11.

### Displaying status

#### in call mode

During calls, you can check if your call is secure.

If a key is configured with the "Security call status" function, this illuminates if the call is secure.

Select and confirm the option shown.

Press the "Security call status" key (if configured).

The call is secure.

The call is not secure.

#### in idle status

You can see whether voice encryption is active on your phone from the display when the phone is in idle mode.

Open the idle menu → Page 18.

Select and confirm the option shown.

Voice encryption is activated for your telephone.

Voice encryption is not activated for your telephone.

Voice encryption? ▲

or

Call encrypted

or

Call not encrypted



Security status ▲

Secure client

or

Standard client

The screenshot shows a vertical menu with the following elements from top to bottom:

- A musical note icon.
- The text "and/or" below the icon.
- A text box containing "Standard call".
- The text "or" below the text box.
- A text box containing "Secure call".
- A dropdown arrow icon.
- A text box containing "Ringer cutoff on?".
- Another dropdown arrow icon.
- A text box containing "Ringer cutoff off?".

## Notes on voice encryption

Your administrator can define in the communication system whether and how you are notified of unencrypted calls. You will then receive a warning tone and/or a message on the display when you accept a call, accept a consultation call or are connected to a conference.

Warning tone

Display for an unencrypted call.

Display for an encrypted call.

## Turning ringer cutoff on and off

If you do not wish to take calls, you can activate the ringer cutoff function. Calls are only identified by **one** ring signal and they are shown on the display.

### Activating

Open the idle menu → Page 18.

Select and confirm the option shown<sup>1</sup>.

### Deactivating

Open the idle menu → Page 18.

Select and confirm the option shown.

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Activating/deactivating "Do not disturb"

If you do not wish to take calls, you can activate do not disturb. Internal callers hear the busy tone, external callers are connected to another phone, which you can specify (consult your administrator).

### Activating

Open the idle menu → Page 18.


Select and confirm the option shown.

### Deactivating

Open the idle menu → Page 18.

Confirm the option shown.

---

 When you lift the handset, you will hear a special tone (continuous buzzing) reminding you that "Do not disturb" is activated.

Authorized internal callers automatically override the DND feature after five seconds.

---

## Caller ID suppression

You can prevent your station number or name from appearing on the displays of external parties you call. The feature remains active until you deactivate it.

### Activating

Open the idle menu → Page 18.


Select and confirm the option shown.

### Deactivating


Open the idle menu → Page 18.

Select and confirm the option shown.

---

 Your administrator can activate/deactivate caller ID suppression for all phones.

---

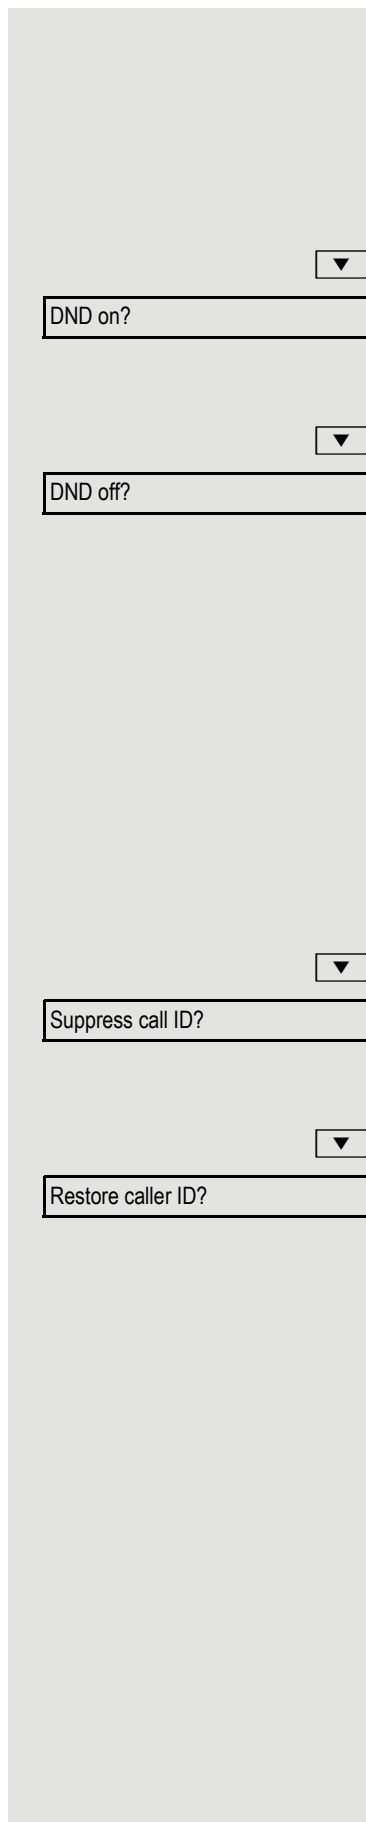

## Monitoring a room

You can use a phone to monitor a room. This function must be enabled on the monitoring phone.

When you call this phone, you can immediately hear what is happening in that room.

### Activating the telephone to be monitored

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

You can either leave the telephone in speakerphone mode or lift the handset and leave it directed towards the noise source.

### Deactivating the telephone to be monitored

Press the illuminated key. The LED goes out.

Replace the handset.

### Monitoring the room

Enter the internal station number of the phone located in the room that you wish to monitor.

## Trace call – identifying anonymous callers (not for U.S.)

You can identify malicious external callers. You can record the caller's phone number during a call or for up to 30 seconds after a call. You should not hang up in the process.


Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.



If the trace is successful, the transmitted data is stored by your network operator. Consult your administrator.

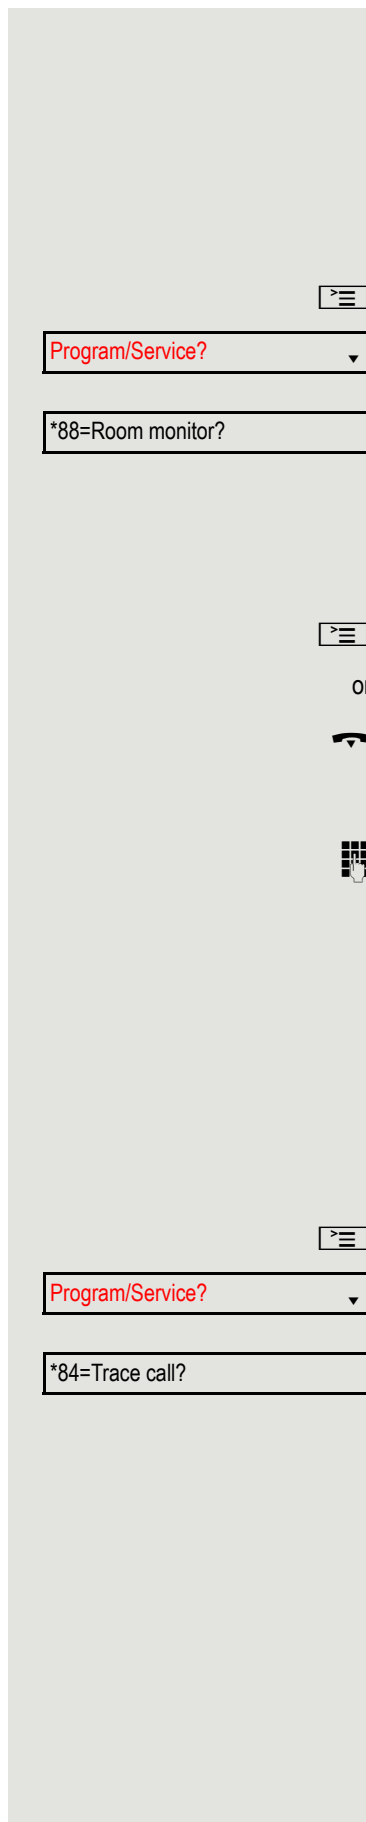

## Locking the telephone to prevent unauthorized use

You can prevent unauthorized parties from accessing certain functions on your phone during your absence, for example you can prevent external phone numbers being dialed or your mailbox being accessed. Consult your administrator to determine which functions are locked.


### Locking the phone

Open the idle menu → Page 18.

Select and confirm the option shown.

Select and confirm the option shown.

Enter code (telephone lock) → Page 67.

 When the phone is locked, a special dial tone sounds when the handset is lifted. Internally, users can make calls as normal.

Your phone can also be locked or unlocked by an authorized party → Page 66.

### Unlocking the phone

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter code (telephone lock) → Page 67.

## Locking another telephone to prevent unauthorized use

If configured (consult your administrator), you can lock and unlock other telephones to prevent unauthorized access.

If a phone user locks his or her phone and forgets the PIN code, you can use this function to unlock the phone.

Open the menu → Page 21.


Select and confirm the option shown.

Select and confirm the option shown.

Enter the internal station number of the phone you wish to lock/unlock.

Confirm the option shown.

Select and confirm the option shown.

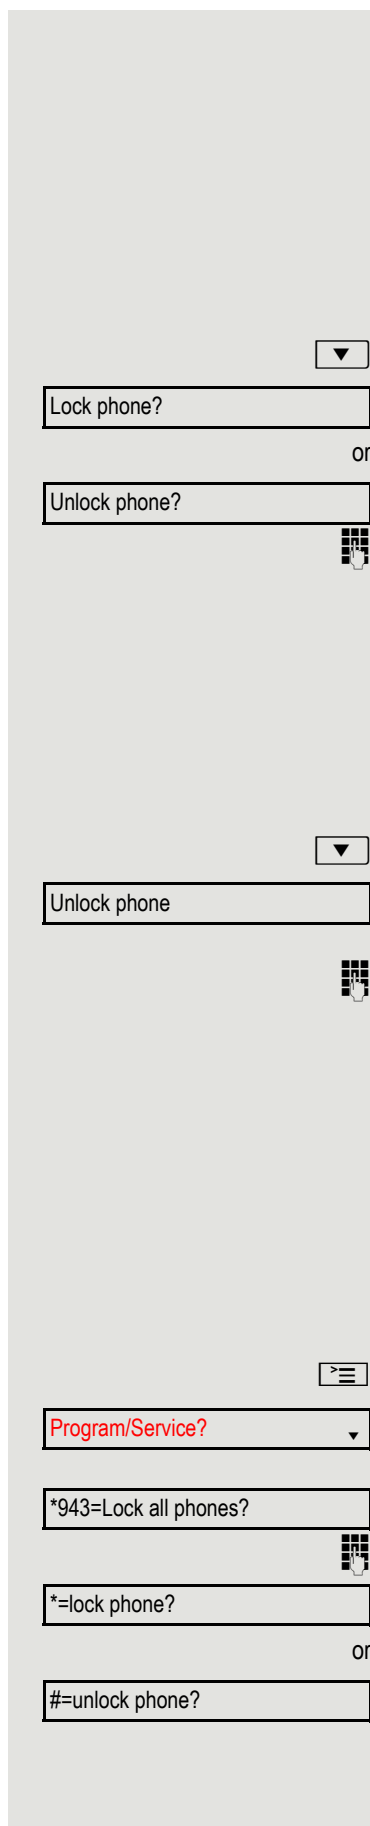

The screenshot shows a vertical menu with several options:

- A dropdown menu with a downward arrow.
- A text input field containing "Lock phone?".
- The word "or" below the input field.
- A text input field containing "Unlock phone?".
- A numeric keypad icon.
- A dropdown menu with a downward arrow.
- A text input field containing "Unlock phone?".
- A numeric keypad icon.
- A menu icon (three horizontal lines with a right-pointing arrow).
- A dropdown menu with a downward arrow, containing the text "Program/Service?".
- A text input field containing "\*943=Lock all phones?".
- A numeric keypad icon.
- A text input field containing "\*=lock phone?".
- The word "or" below the input field.
- A text input field containing "#=unlock phone?".

## Saving your PIN code

Enter a PIN code to use the functions

- for locking the telephone to prevent unauthorized use → Page 66
- for using another telephone like your own → Page 71

You can save this code.

Open the menu → Page 21.

Select and confirm the option shown.

Confirm the option shown.

Enter the current five-digit code.


If you have not yet set a code, use "00000" the first time.

Enter the new code.

Re-enter the new code.



If you forget your code, consult your administrator. They can reset your code to "00000".

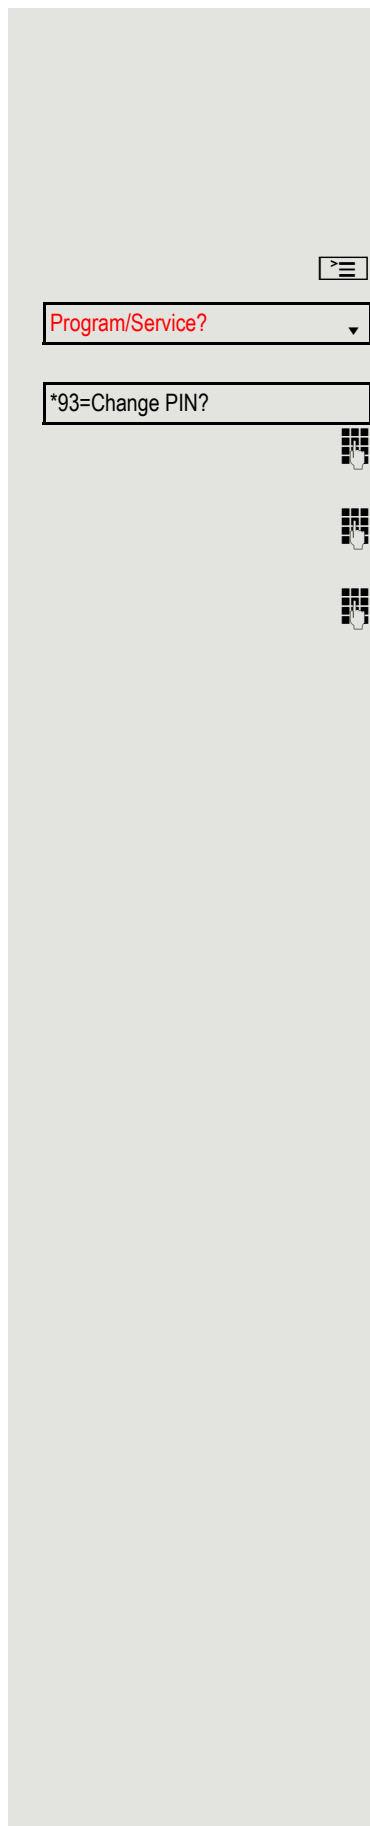

## More functions/services

### Appointment reminder function

You can configure your phone to call you to remind you about appointments  
→ Page 69.

You must save the required call times. You can enter a single appointment that will take place in the next twenty-four hours or you can enter a daily recurring appointment.

### Saving a timed reminder

Open the menu → Page 21.

Select and confirm the option shown.

Confirm the option shown.

Enter a 4-digit time such as 0905 for 9.05 (= 9.05 a.m.) or 1430 for 14.30 (= 2.30 p.m.).

If the selected language is "US English" (settings → Page 106) you can enter the code 2 for "am" or 7 for "pm" (default = "am").

Confirm the option shown.

Select and confirm the option shown.

Confirm the option shown.

### Deleting and checking a saved appointment


Open the menu → Page 21.


Select and confirm the option shown.

Confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.

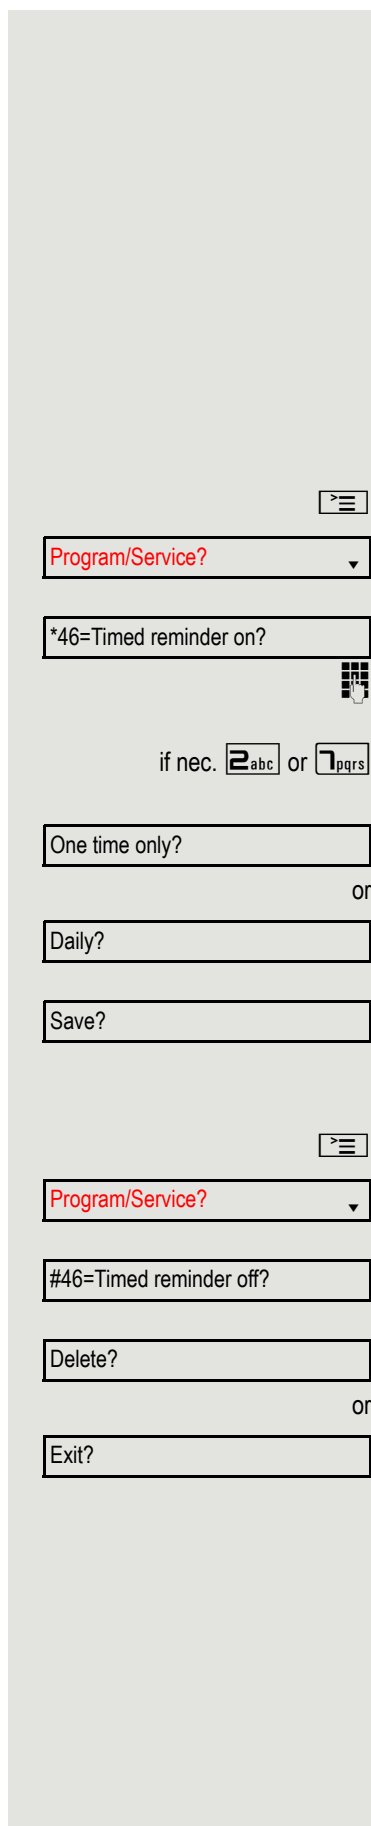

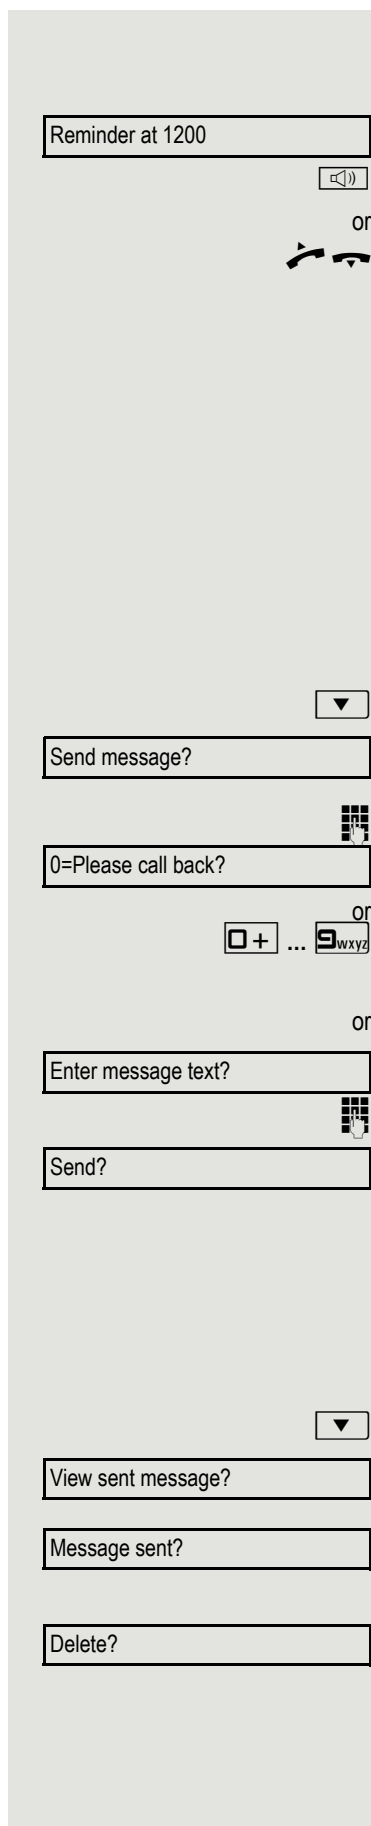

## Using timed reminders


**Prerequisite:** You have saved a reminder → Page 68. The saved time arrives.

The phone rings. The appointment time is displayed.

Press the key twice.

Lift the handset and replace it again.

---

 If you do not answer the timed reminder, it is repeated five times and then deleted.

---

## Sending a message

You can send short text messages to individual stations or groups of stations with system telephones.

### Creating and sending a message

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the internal station number of the recipient or group.

Select predefined text (can be changed by the administrator) and confirm.

Enter the code directly.


The code is shown on your display with the corresponding message.

Select and confirm the option shown.

Text entry (up to 24 characters) → Page 18.

Confirm the option shown.

---

 Transmitted text messages are saved as callback requests on system telephones with no display and on ISDN, pulse or tone dialing telephones.

---

### Displaying and deleting messages you have sent

**Prerequisite:** The recipient has not yet accepted a sent message.

Open the idle menu → Page 18.

Select and confirm the option shown.

Confirm the option shown.

The text message is displayed.

Select and confirm the option shown.

The message is deleted.



## Viewing and editing incoming messages

Pay attention to the notes on → Page 19.

The LED lights up. Press the key shown.

Confirm the option shown.

The sender's caller ID appears on the display.

Confirm the option shown.

The text message appears on the display.

## Viewing the transmission time

Confirm the option shown.

## Call sender

Select and confirm the option shown.

## Deleting messages

Select and confirm the option shown.

## Leaving an advisory message

You can leave messages/advisory messages on your phone's display for internal callers who wish to contact you in your absence.

When you receive a call, the message appears on the caller's display.

Open the idle menu → Page 18.


Select and confirm the option shown.

Select predefined text (can be changed by the administrator) and confirm.

Enter the code directly.

The code is shown on your display with the corresponding message.

---

 Predefined messages with a colon can be completed by entering a digit.


---

Select and confirm the option shown.

Enter message (up to 24 characters) → Page 18.

Confirm the option shown.



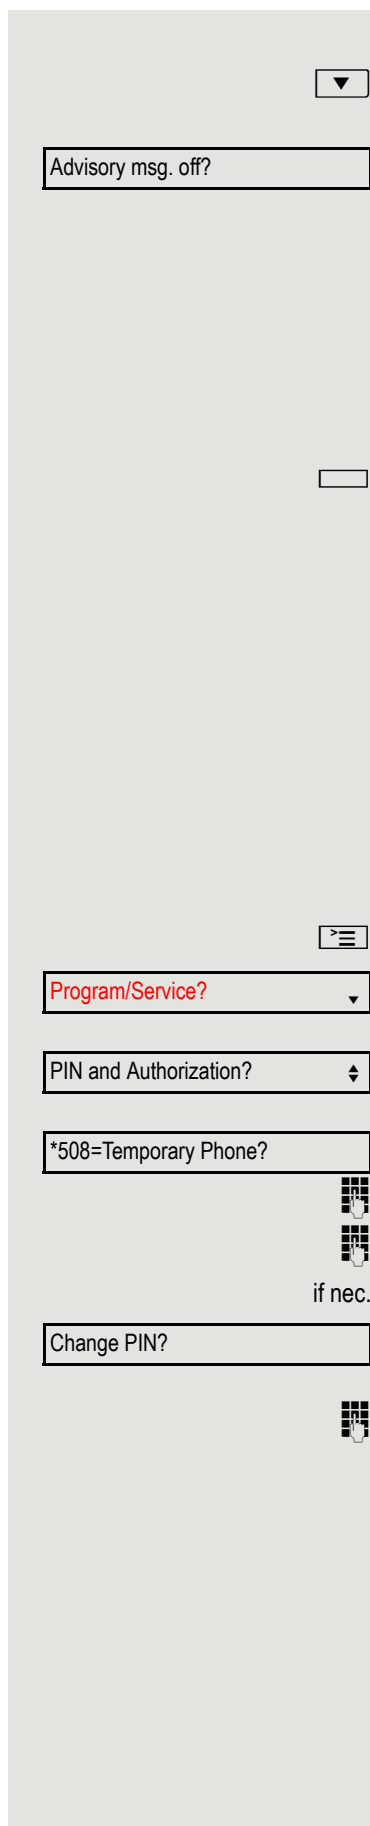

## Deleting advisory messages

Open the idle menu → Page 18.

Select and confirm the option shown.

## Displaying the number of waiting calls/ overload display

You can show the number of external waiting calls on the display if you programmed a key with "View number of calls" → Page 55.

Press the "Calls in Q" key.

If the number of waiting calls exceeds a preset limit while you are conducting another call (overload), the LED on the key lights up.

- LED off: There are no waiting calls.
- LED is flashing slowly: The set limit has been reached.
- LED is flashing quickly: The limit has been exceeded (overload).

## Using another telephone like your own for a call

Other parties can temporarily use your phone like their own for an outgoing call.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

Enter the number of the other user.

Enter the other user's code → Page 67.

if nec.

If the other user has not set a PIN, he or she is prompted to do so on his or her phone.

Dial the external number.

This state is canceled as soon as the call is ended.

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Using a mobile phone number at a random phone

You can program a mobile phone number that was set up especially for you by your administrator at a system-based **OpenStage** phone of your choice. The original "guest telephone" setting is deactivated. The mobile phone number remains available until you log off from the "guest telephone".

### Logging on to the "guest telephone"

Log on to the "guest telephone" with a mobile phone number.

**Prerequisite:** You received a mobile phone number and, where applicable, a password (consult your administrator).

Enter the code for "Mobile Login (Log on)", see → Page 123).  
You see the prompt "New number".

Enter the mobile phone number.  
You are prompted to enter the "Code for **nnn** (e.g. 834):

Enter the password and confirm.



Press the key shown.

Confirm the option shown.

The logon procedure begins.

Your mobile phone number will appear on the left of the display when you are correctly logged on → Page 18.

You can no longer see the original user settings for the "guest telephone" but you can now use your mobile connection. Entries are only temporarily saved in the call lists and personal phonebook, in other words they are no longer there the next time you log on.



or



or

Entry complete

## Moving the connection to the next telephone

If you want to move your connection from the first "guest telephone" to a second "guest telephone", log on to the second "guest telephone" in the usual fashion (see → Page 72).

The message "Log off successful" is output on the first "guest telephone". The second "guest telephone" is now blocked. You can now use the second "guest telephone" in the same way as the first one.

## Logging off from the "guest telephone"

Enter the code for "Mobile Login (Log off)", see → Page 123).  
The logoff procedure begins.

The "guest telephone" is now available again with its original phone number, features and functions.

Your old and new telephone are the first telephones at each connection. The telephones are in idle state.

The following procedure is carried out on the new phone.

Open the menu → Page 21.

Select and confirm the option shown.


Select and confirm the option shown.

Enter own station number.

Enter code (telephone lock) → Page 67.  
(Not necessary if you have not set a code.)

Confirm the option shown.

---

 If you change numbers of different system phones, programmed keys are replaced with the default assignment.  
You can however connect your phone to a different port and then carry out the procedure.


---

## Fax details and message on answering machine

If a fax or answering machine is connected to your system and you have assigned the "Fax details" function to a programmable key → Page 55, the key lights up when a fax or a message has been received.

## Deactivating signaling

Press the illuminated "Fax service" key. The LED goes out.

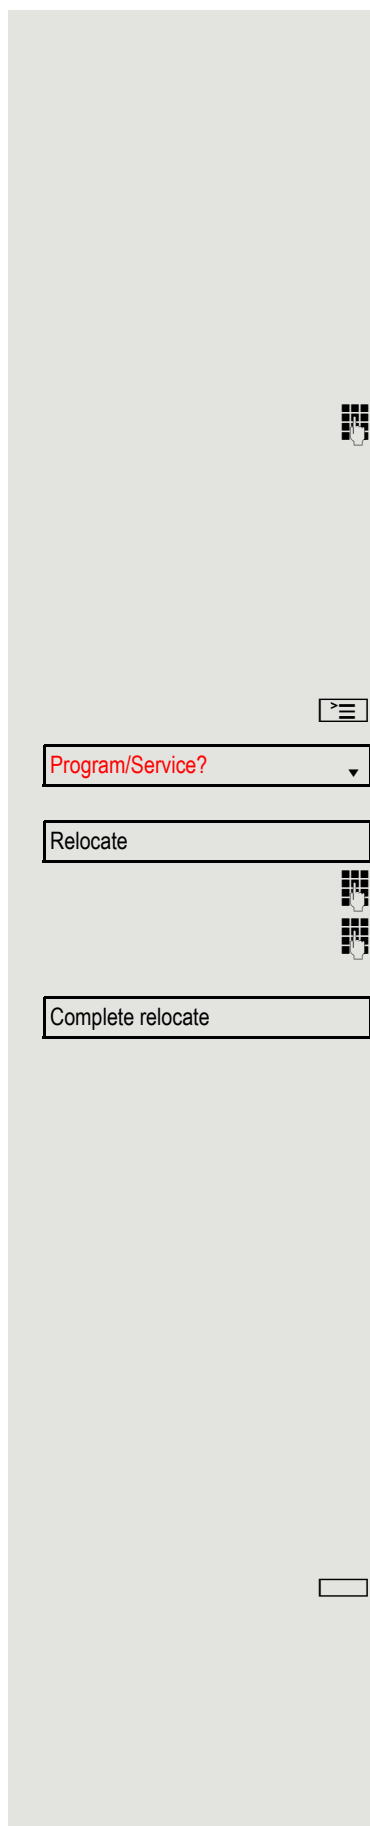

## Resetting services and functions (system-wide cancellation for a telephone)

A general reset procedure is available for initiated functions. The following functions are deleted, if enabled:

- Forwarding on
- Advisory msg. on
- Ringing group on
- Hunt group off
- Suppress call ID
- Waiting tone off
- DND on
- Ringer cutoff on
- Received messages:
- View callbacks

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown<sup>1</sup>.

## Activating functions for another telephone

If configured (consult your administrator), you can activate and deactivate the following functions for other phones (associated service):

- Do not disturb, code \*97/#97 → Page 64
- Call forwarding, code \*11, \*12, \*13/#1 → Page 28
- Lock and unlock phone, code \*66/#66 → Page 66
- Ringing group, code \*81/#81 → Page 94
- Leave message/advisory message, code \*69/#69 → Page 70
- Group call, code \*85/#85 → Page 94
- Reset services and functions, code #0 → Page 74
- Control relays, code \*90/#90 → Page 78
- Night answer, code \*44/#44 → Page 54
- Timed reminders, code \*46/#46 → Page 68

Open the menu → Page 21.


Select and confirm the option shown.

Confirm the option shown.

Enter the internal station number of the phone for which you wish to activate the function.

Enter code (for example, \*97 for "Do not disturb on").

For any additional input, follow the instructions on your display.

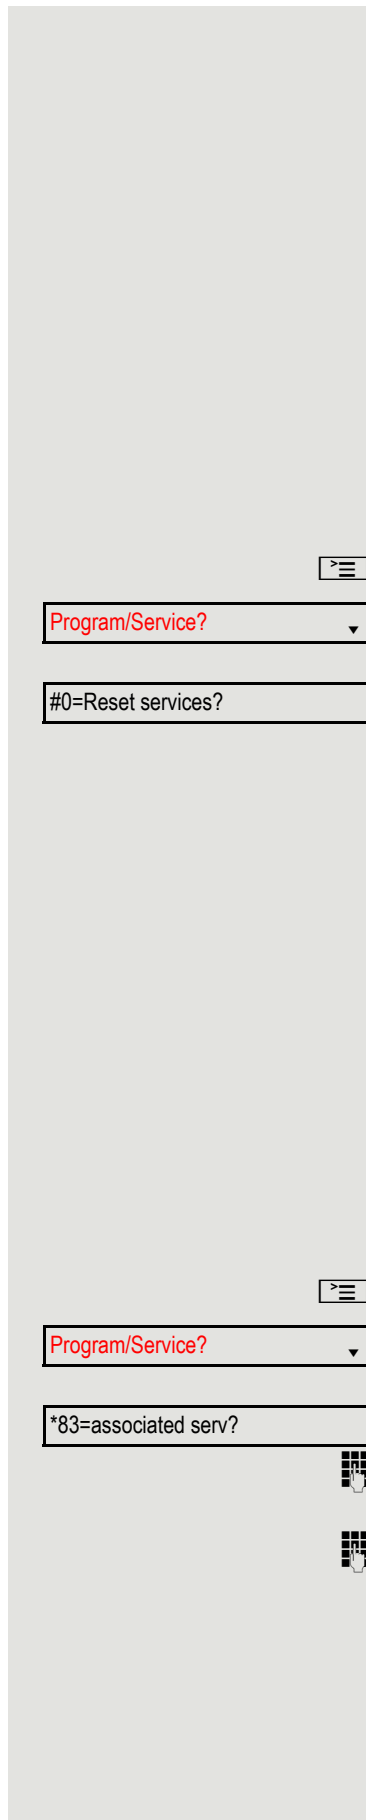

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Using system functions from outside DISA (Direct Inward System Access)

If configured (consult your administrator), you can use an external phone like an internal station to set up an outgoing external connection via the system. You can also activate or deactivate the following system functions:

- Reset services and functions, code #0 → Page 74
- Call forwarding, code \*1/#1 → Page 28
- Lock and unlock phone, code \*66/#66 → Page 66
- Save your PIN code, code \*93 → Page 67
- Send a message, code \*68/#68 → Page 69
- Leave message/advisory message, code \*69/#69 → Page 70
- Ringing group, code \*81/#81 → Page 94
- Group call, code \*85/#85 → Page 94
- Caller ID suppression, code \*86/#86 → Page 64
- Camp-on tone, code \*87/#87 → Page 47
- Open door, code \*61 → Page 35
- Release door opener, code \*89/#89 → Page 36
- Control relays, code \*90/#90 → Page 78
- Do not disturb, code \*97/#97 → Page 64
- Ringer cutoff, code \*98/#98 → Page 63
- Dial using speed dial, code \*7 → Page 42
- Associated service, code \*83 → Page 74

**Prerequisite:** Your phone supports tone dialing (DTMF) or you can switch your phone to tone dialing. The phone is not connected to the system.

Establish a connection to the system. Enter the station number (consult your administrator).

Wait for the continuous tone (if necessary, switch phone to tone dialing) and enter the internal number assigned to you and the corresponding PIN code.

Enter the code (only required if programmed in the system).

Wait for the dial tone and enter the code for example, \*97 for Do not disturb on. If necessary, make further entries; refer also to the user guide for dial pulse/DTMF phones.

Dial the external number.



You can only perform one function/establish one outgoing connection at a time.

The connection is cleared as soon as the function is successfully activated.

In the case of an external call, the connection is cleared as soon as one of the call partners hangs up.

## Using functions in ISDN via code dialing (keypad dialing)

If authorized (consult your administrator), you can access ISDN functions in some regions using codes.

Open the menu → Page 21.

Select and confirm the option shown.

Confirm the option shown.


Enter the required trunk number (consult your administrator).

Enter a code for the required ISDN function (consult your administrator).



Contact your network provider to find out which ISDN functions can be code-operated in your country.

Unify GmbH & Co. KG shall not be liable for damages/costs that may be incurred by fraudulent activities or remote operation (such as toll fraud).

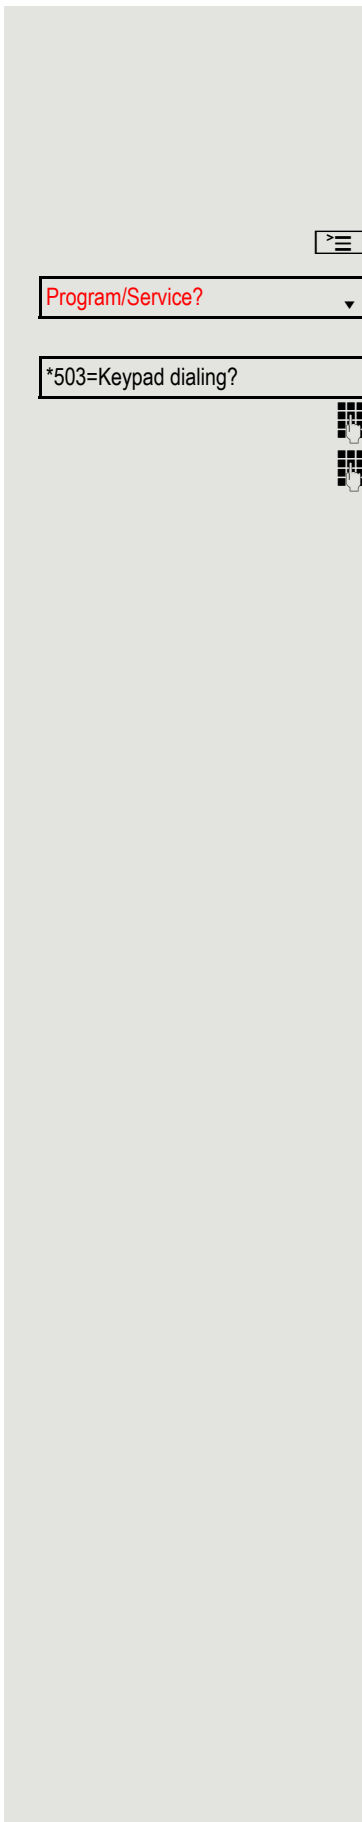

## Controlling connected computers/programs/telephone data service

If this function has been configured (consult your administrator), you can control connected computers or programs running on them, such as hotel services or information systems, from your telephone.

**Prerequisite:** You have set up a connection.

Open the menu → Page 21.

Select and confirm the option shown.

Confirm the option shown.

For entering data, you are guided by the connected computer. However, depending on the configuration (consult your administrator), you have to enter your data in one of the following ways:

### Input in en-bloc mode:

Enter data.

Complete entry.

Confirm the option shown.

### Input in online mode:

The connected computer processes your entries directly.

Enter the code.

Enter data.

The screenshot shows a vertical menu on a light gray background. At the top right is a menu icon (three horizontal lines with a right-pointing arrow). Below it is a dropdown menu with the text "Program/Service?". Underneath is a text input field containing "\*42=Tel. data service?". Further down are several function keys: a "0+" key, a "wxyz" key, and a "#" key. Below these keys is the text "or". Underneath is another text input field containing "Entry complete?". Below this field is the text "or". At the bottom are more function keys: a "0+" key, a "wxyz" key, and a "#" key.



## Communicating with PC applications over a CSTA interface

If configured (consult your administrator), you can use your phone to communicate with PC applications (CSTA = **C**omputer **S**upported **T**elecommunications **A**pplications). You send information to the application and receive information from the application, for example, via your phone display.

Enter the code.

Enter the three-digit ID for the application you wish to control.

Use the relevant keys to communicate with the application.

### Temporarily interrupting communication with the application

The phone rings. You answer the call.

The "Data I/O" key flashes: Communication with the application was automatically interrupted.

### Resuming communication with the application

Press the flashing "Data I/O" key. The LED lights up.

### Ending communication with the application

Select and confirm the relevant CSTA message.

Lift the handset and replace it again.

## Controlling relays (only for HiPath 3000)

If this function has been configured (consult your administrator), you can use up to four relays to enable/disable different devices (such as a door opener). Depending on how you program the relays, you can activate and deactivate them manually or configure them to activate and deactivate automatically (after timeout).




Special features must be taken into consideration if your telephone operates with system networking via LAN → Page 103!

Select and confirm the option shown.

Select and confirm the option shown.

Enter the relay.

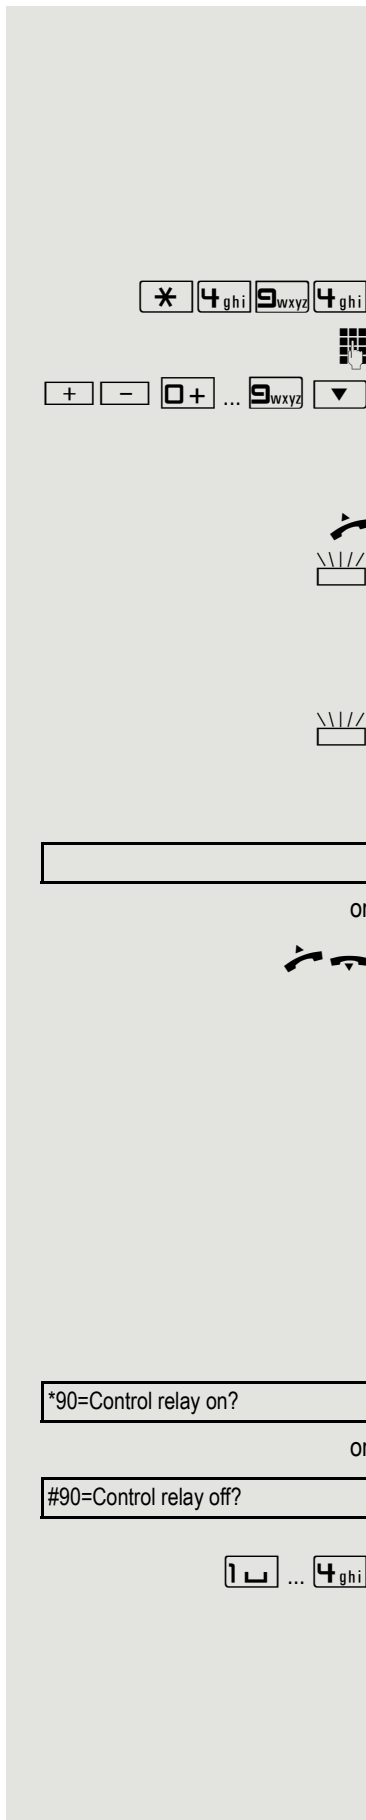

## Sensors (HiPath 33x0/35x0 only)

If configured (consult your administrator), sensors are able to recognize signals, call your phone and display an appropriate message on the screen.

## Paging persons (not for U.S.)

If radio paging equipment (PSE) is connected to your system (consult your administrator), you can locate people via their pocket receivers.

Pocket receivers signal a call request to the person you want to page. This person can then answer the page at the nearest phone.

### Paging persons

To ensure that you can be found, you must have enabled a ringing group → Page 96, call forwarding → Page 28 or call forwarding-no answer (service engineer) to the internal station number of your PSE.


A call request is signaled automatically.

### Answering the page from the nearest telephone

Lift the handset.

Enter the code.

Enter own station number.



# Phonebooks

## Personal phonebook

The personal phonebook is restricted to 100 entries.

### Creating a new contact

You can create contacts more conveniently via the web interface → Page 112.

Open the menu → Page 21.

Select and confirm to open the local phonebook.

Select and confirm the option shown.

Fill in the three fields

- Last name
- First name
- Number

accordingly.

Select and confirm to save the phonebook entry.

### Editing a contact

You can edit contacts more conveniently via the web interface → Page 112.

Open the menu → Page 21.

Select and confirm to open the local phonebook.


Select and confirm the relevant entry.


Select and confirm the option shown.

Select and confirm, for example the Last name field.

Change and confirm .

Select and confirm the option shown.

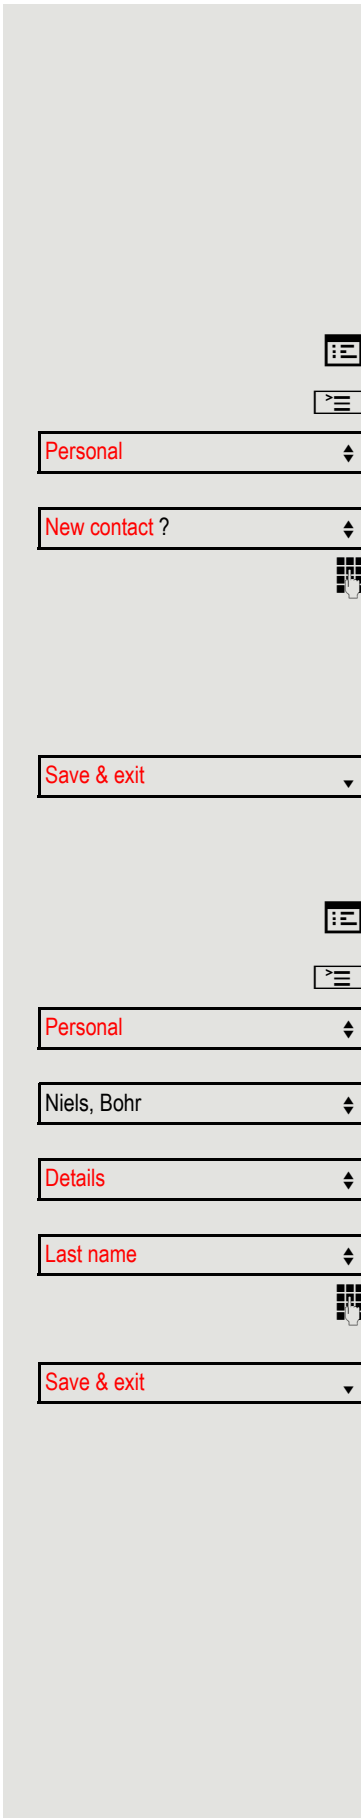

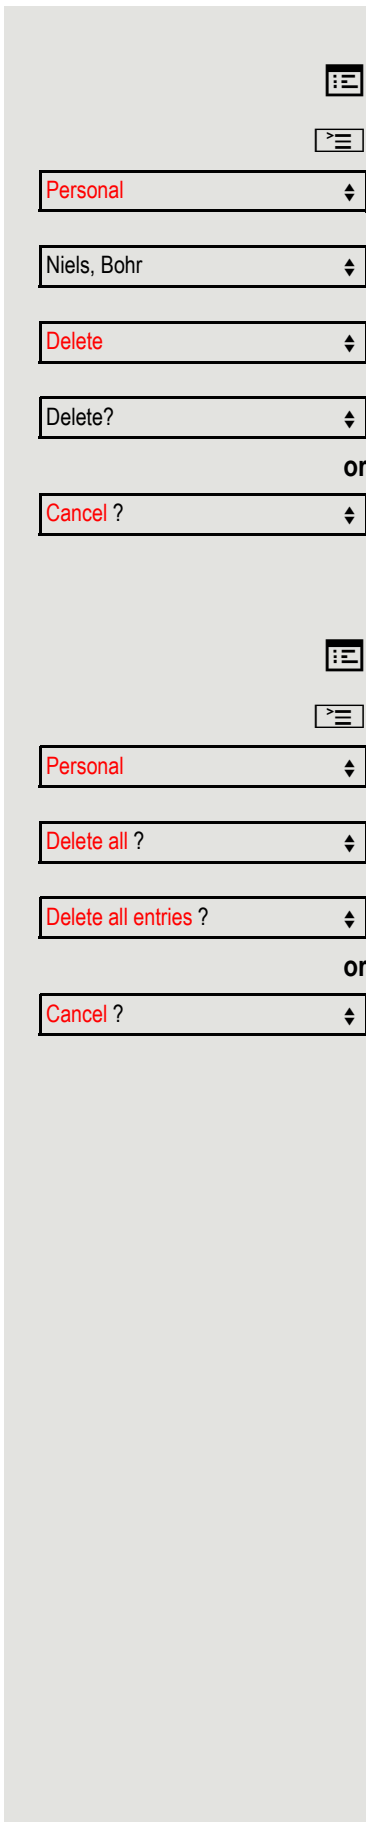

## Deleting a contact

You can delete contacts more conveniently via the web interface → Page 112.

Open the menu → Seite 22.

Select and confirm to open the local phonebook.

Select and confirm the relevant entry.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm to cancel the process.

## Deleting all contacts

You can delete contacts more conveniently via the web interface → Page 112.


Open the menu → Seite 22.

Select and confirm to open the local phonebook.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm to cancel the process.

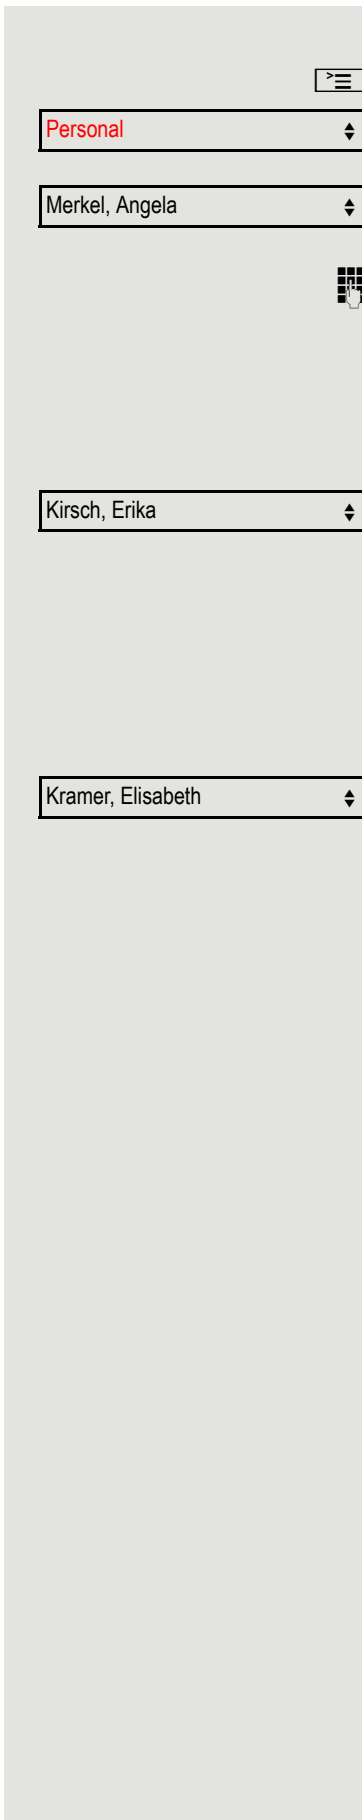


## Searching for a contact

Open the menu → Seite 22.


Select and confirm to open the local phonebook.

The last entry used is displayed.

Enter the first letter of the name you are searching for, e.g. K.

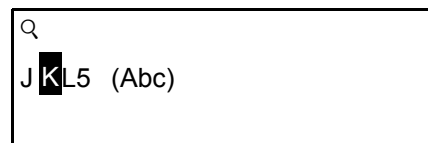

The first name found with the initial letter K is displayed after a short time. If you are looking for a name that begins with Kr, also enter the second letter in the search field:

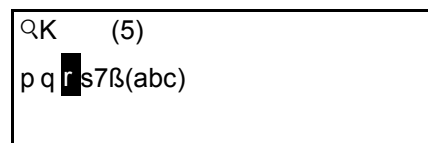

The first name with the initial letters Kr is displayed.

You can also browse the phonebook with the navigation keys until you reach the required party → Seite 17.

## Corporate directory

The corporate directory is an LDAP database. You can search the database for contact entries if you can access this database over your network and your access was correctly configured by your administrator.

You can search for contacts using the name (simple search) or different criteria for an entry (advanced search), for example job title or address.

### Searching for a contact

Open the menu → Seite 22.

Select and confirm to open the company-wide "Corporate" directory.

Select and confirm the option shown.


The following 11 search fields can be used:

- Last name
- First name
- Office 1
- Office 2
- Mobile
- Home
- Company
- Address 1
- Address 2
- Professional role
- E-mail

Select and confirm the required search field (e.g. "Last name").

Enter a search text. If you for example only enter the first letter of the last name, all entries with this initial letter are displayed.

Select and confirm when you have completed one or more search fields. The search begins. If the entry you searched for is found, you can dial or view the entry details.

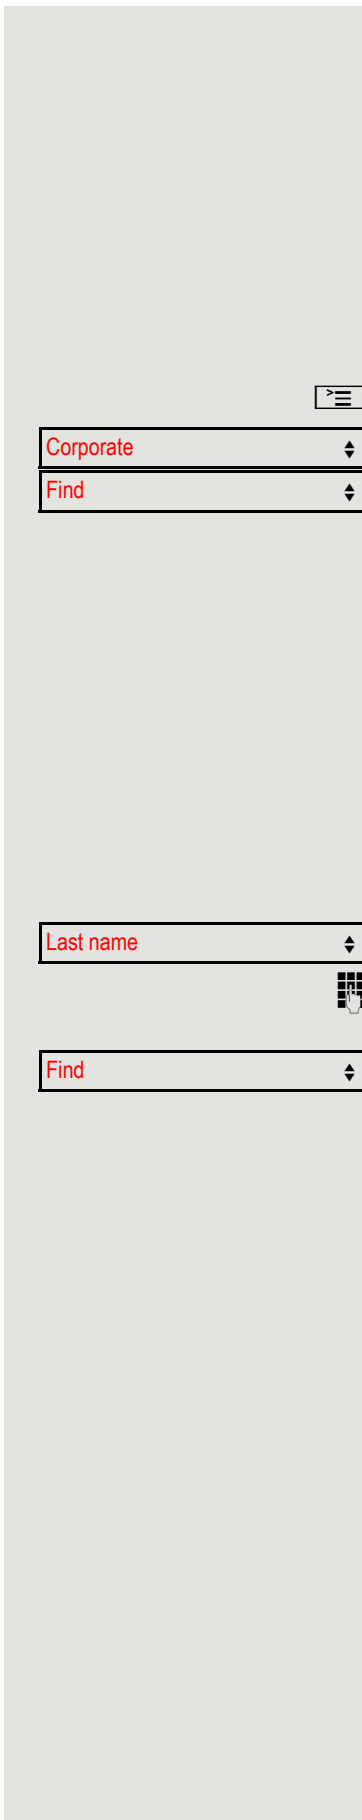

## Advanced phonebook editing

### Viewing entries

**Prerequisite:** You found and selected an entry (see above).

Select and confirm the option shown. All fields of the entry are displayed.

### Resetting the search fields

**Prerequisite:** The search fields are listed.

Select and confirm the option shown. You can now enter new search criteria for a search.

### Defining a qualifier before a search

Prior to a search, you can select which qualifiers should also appear in the output list.


Select and confirm the option shown. You may choose between the following criteria:

- No qualifier
- Job function
- Address 1
- Email
- Business 1
- Mobile
- Business 2
- Private
- Company
- Address 2

Select and confirm the desired qualifier.

Select and confirm to close the list.

The screenshot shows a vertical grey panel with four main sections. The top section contains a dropdown menu with 'Details' selected. The second section contains a dropdown menu with 'Delete' selected. The third section contains a dropdown menu with 'Qualifier' selected. Below these is a row of three buttons: an up arrow, a down arrow, and 'OK'. The bottom section contains a dropdown menu with 'Back' selected.

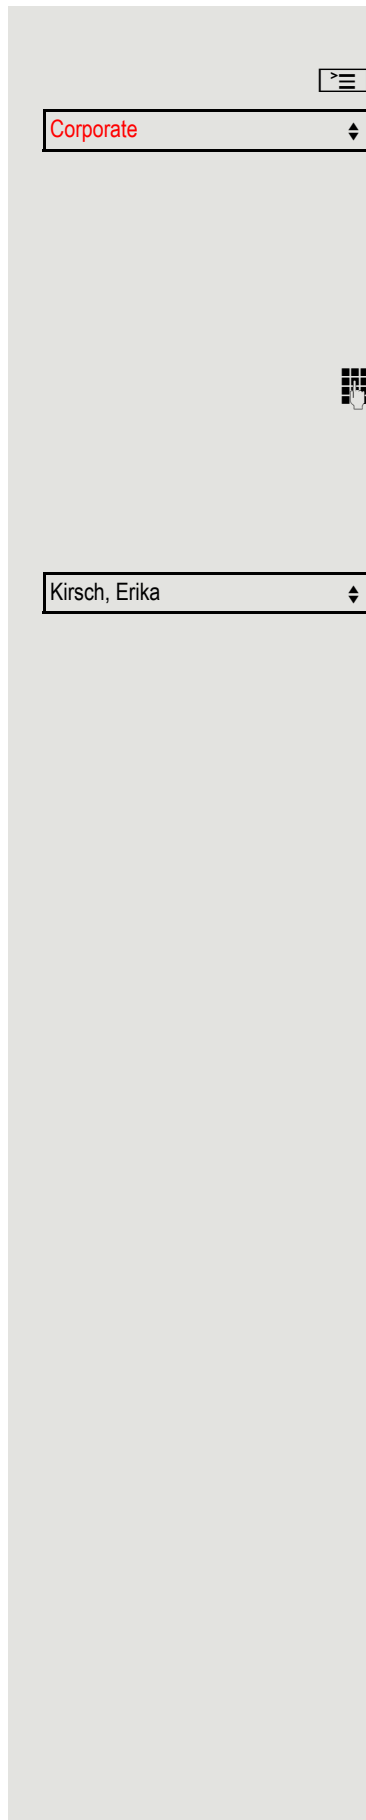

## Quick search

Open the menu → Seite 22.

Select and confirm to open the company-wide **phonebook**.

Q

Enter the name (Abc)

Enter the first letter of the name you are looking for, e.g. "K".

QK

J **K** L5 (Abc)

If you do not enter any further characters, all available names with the corresponding initial letter are displayed after a predefined period of time or after pressing  to confirm.

QKr

p q **r** s7B(abc)

You can restrict the output by entering the second and other letters. The  key is used to switch between letters and numbers. The   keys are used to delete individual characters again.

You can control the search individually by entering extended characters. To select extended characters, first press the  key.

Rule list:

Character	Description
#	Searches for the exact string before the extended character.
*	Wildcard. This searches for the character entered and all possible subsequent characters.

You enter this character by selecting it in the extended characters.



## Making calls in the team/executive/secretary configuration

If configured (consult your administrator), you belong to a team of subscribers with multiple lines (MultiLine → Page 12). Your phone features trunk keys (MULAP keys) → Page 86.

### Lines

A distinction is made between primary and secondary lines. Each of these line types can be used on a private or shared basis → Page 86.

#### Primary line

All multi-line telephones have a primary line. This line can be reached in the usual manner via your public phone number. Incoming calls to your number are signaled on this line.

#### Secondary line

A secondary line on your phone is used as a primary line by another subscriber. Your primary line, which is configured on another telephone, simultaneously functions as the secondary line on that telephone.

### Line utilization

#### Private line

A line that is used by a single telephone. This line cannot be used as a secondary line by another telephone.

#### Shared line

A line that is configured on multiple telephones. The line status is displayed for all telephones that share this line (if configured). If, for example, a shared line is being used by a telephone, a status message indicating that this line is busy is displayed on all other telephones that share this line.

#### Direct call line

A line with a direct connection to another telephone. You can see the status of the line from the LED display.

### Line seizure

Line seizure must be configured (consult your administrator). If automatic line seizure is configured, a trunk is automatically assigned when you lift the handset or press the speaker key.

### Line/trunk keys




The programmable keys on multi-line phones function as line or trunk keys. Every key programmed as a "Trunk key" (key label: Transfer Trk) corresponds to one trunk with the result that you can configure up to eight trunks in **OpenStage 15**.

As a team member, you can independently program the following functions on keys → Page 55:

- Direct station select
- Join/leave group  
(not available on executive phone in an executive / secretary team)
- Ring transfer: On/Off  
(only in an executive/secretary team)

You can also program a key with the function "Forward Line" (call forwarding) for each line.


### LED displays on trunk keys

LED		Meaning
	Off	– The line is in idle mode.
	Flashing <sup>1</sup>	– Incoming call on the line. – Hold reminder is activated. – The line is on "Hold".
	On	– The line is busy.

<sup>1</sup> In this manual, flashing keys are identified by this icon, regardless of the flashing interval. The flashing interval represents different statuses, which are described in detail in the corresponding sections of the manual.

### Accepting calls with the trunk keys

**Prerequisite:** Your phone rings and/or a trunk key flashes quickly.

if nec. 

Press the trunk key that is flashing quickly.  
(not necessary for automatic trunk seizure/prime line is not active).



Lift the handset.

or

On-hook dialing: Speakerphone mode.

### Dialing with trunk keys

if nec. 

Press the free trunk key you wish to use to establish the connection  
(not necessary for automatic trunk seizure/prime line is not active).



Dial the phone number.



If the party answers: Lift the handset.

or

On-hook dialing: Speakerphone mode.

## Placing a call on hold on a trunk key and retrieving the held call


**Prerequisite:** You are conducting a call via one of your group's trunks. The "Hold" key has been programmed on your telephone → Page 55.

### Holding

Press the "Hold" key.



if nec.



Replace the handset or press the disconnect (release) key.

Depending on the configuration (consult your administrator), this may be necessary so other team members can also pick the call on hold.

### Retrieving the call

Press the trunk key that is flashing slowly.



## Making calls on multiple lines alternately

**Prerequisite:** You are conducting a call via one of your group's trunks. Another trunk key is flashing.

Press the flashing line key. The first call party is on hold on the other trunk.



Press the trunk key that is flashing slowly. The second call party is on hold.



You can switch between lines as often as you wish. Press the trunk key flashing slowly each time.

## MULAP conference release

If configured (consult your administrator), you can program a key on your phone with the function "MULAP Privacy Release" → Page 55. The default label is "Priv Release".

If you program this key, you do not have to use the menu to set up a conference. Your team partner only has to press the flashing trunk key associated with your trunk on his or her phone to immediately join the conference.

You are conducting a call.



Press the "Priv Release" key. The LED lights up.



Up to three team members can now join the conference.

**Prerequisite:** The trunk on which you are speaking is configured on the other phone as a trunk key.

Press the flashing line key.



## Direct station selection keys

Each team member has a direct station selection key for every other team member.

This means that each team member can be reached directly by other team members at the touch of a button.

### Understanding LED messages from DSS keys



LED on the DSS key is off - the team member is not conducting a phone call.

or



LED on the DSS key is lighting – the team member is conducting a phone call or has activated do not disturb.

or



LED on the DSS key is flashing **quickly** - a call has arrived for you and needs to be answered.


or



LED on the DSS keys is flashing **slowly** – a caller is trying to reach another member of your team, who has not yet answered.

### Using DSS keys to answer calls

**Prerequisite:** Your telephone rings or the DSS key flashes.

if nec. 

Press the flashing DSS key.

This is not necessary if you are called directly (DSS key flashes quickly).



Lift the handset.

or

On-hook dialing: Speakerphone mode.

### Calling a team member directly



Press the DSS key.

or



If the team member you wish to reach is conducting another call, the DSS key on your telephone lights. You can still make the call in this case.




If the party answers: Lift the handset.

or


On-hook dialing: Speakerphone mode.

## Transferring a call in progress

 Press the DSS key and announce the call if necessary.


 Replace the handset.

or

 Press the key shown.

## Accepting a call for another team member

 Press the flashing DSS key or trunk key.

 Lift the handset.


or

On-hook dialing: Speakerphone mode.

## Forwarding calls on trunks

You can immediately forward internal and/or external calls to your lines to different internal or external telephones (destinations) (external destinations are also possible if the system is configured accordingly).

Activating call forwarding for one trunk activates the function for all trunk keys assigned to this trunk in your group.

 Open the menu → Page 21.


 Program/Service?

Select and confirm the option shown.

Forward Line: ON

Select and confirm the option shown.

or

 If available, press the "CFW MULAP" key. (You have programmed a key with the incomplete "CFW MULAP" function, excluding the call forwarding type and destination → Page 55).

 Press the required line key.

or



Enter the required trunk number.

1=all calls

Select and confirm the option shown.

or

2=external calls only

Select and confirm the option shown.

or

3=internal calls only


Select and confirm the option shown.



Enter the destination number.


Save

Confirm the option shown.



or

If available, press the "CFW MULAP" key. (You have stored the call forwarding type and destination on the "CFW MULAP" key, → Page 55.)

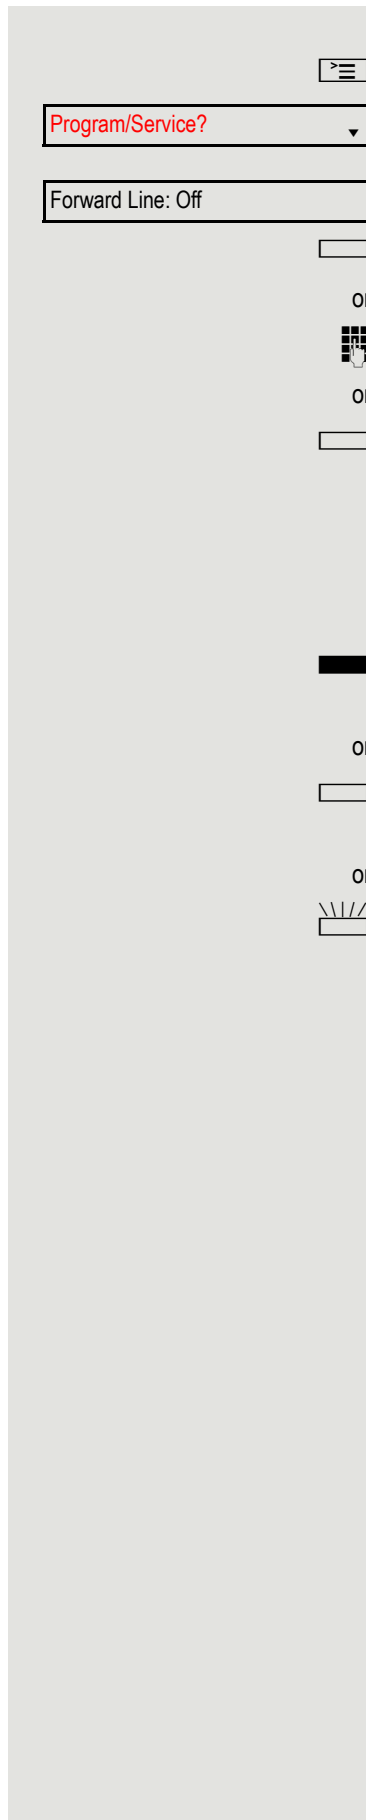

### Deactivating call forwarding

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Press the required line key.

Enter the required trunk number.

If available, press the "CFW MULAP" key.



If you have activated call forwarding for a trunk, a special dial tone sounds when the line is seized.

### Understanding LED messages of the "CFW MULAP"

The LED on the "CFW MULAP" key is off – call forwarding is not active for this trunk.

The LED on the "CFW MULAP" key lights up – call forwarding is active for this trunk.

The LED on the "CFW MULAP" key flashes **slowly** - the trunk is the destination of call forwarding.

## Transferring calls directly to the executive phone

Normally, all calls for the executive are audibly signaled only by the secretary phone.

You can set audible signaling so calls are only signaled acoustically by the executive phone or by a second phone assigned to it.

**Prerequisite:** There is a key programmed with the function "Ring Transfer" on your phone. The default label is "Ring xfer".

### Activating

Press the "Ring xfer" key. The LED lights up.

or



Open the menu → Page 21.

Program/Service?

Select and confirm the option shown.

Ring Transfer: On

Select and confirm the option shown.



Press the required line key.

or



Enter the required trunk number.

### Deactivating



Press the "Ring xfer" key. The LED goes out.

or



Open the menu → Page 21.

Program/Service?

Select and confirm the option shown.

Ring Transfer: Off

Select and confirm the option shown.




Press the required line key.

or



Enter the required trunk number.

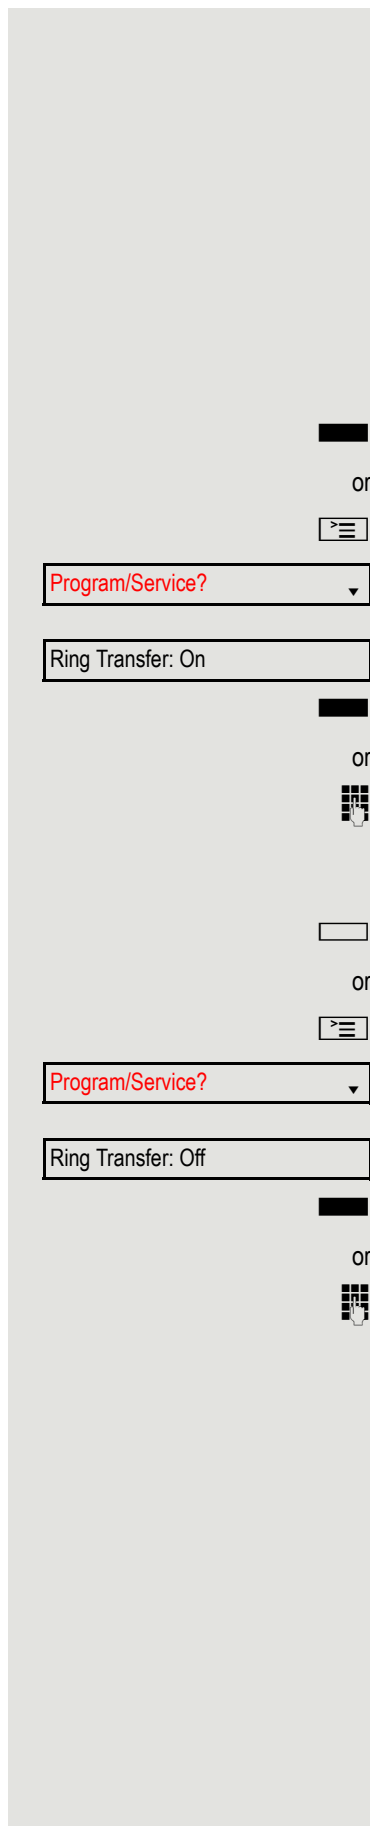




## Using team functions

If configured (consult your administrator), your telephone is part of a team. The team consists of internal phones that are able to use certain functions.

### Activating/deactivating a group call

 Special features must be taken into consideration if your telephone operates with system networking via LAN → Page 99!

If configured (consult your administrator), you belong to one or more groups of stations, which can be reached via hunt group or group call station numbers. Incoming calls are signaled one after the other (= hunt group) or simultaneously (= group call) on all phones in the group, until a group member answers the call.

Each station in the group can still be reached via its own station number.

You can activate and deactivate the audible signal for a hunt group, group call or individual trunks in a group.

#### You are part of a hunt group or call group

Open the idle menu → Page 18.

Select and confirm the option shown<sup>1</sup>.

Select and confirm the option shown.


Press the "Group call" key.



Leave group?

or

Join group?



1. "Differing display views in a HiPath 4000 environment" → Seite 111

## You belong to multiple groups

Open the idle menu → Page 18.

Select and confirm the option shown<sup>[1]</sup>.

Select and confirm the option shown.

Press the "Group call" key.

If an "X" appears between group/trunk number (such as 301) and group name, the audible tone is active for this group or trunk.

No "X" means that the audible tone is deactivated.

Confirm the option shown. The next group/trunk number is displayed with a group name.

Select and confirm the option shown<sup>1</sup>.  
The audible tone for the group/trunk displayed is deactivated.

Select and confirm the option shown<sup>[1]</sup>.  
The audible tone for the group/trunk displayed is activated.

Select and confirm the option shown.  
The audible tone for all groups and trunks is deactivated.

Select and confirm the option shown.  
The audible tone for all groups and trunks is activated.



If you have activated the audible tone for another group/trunk or deactivated the audible tone for all groups/trunks you belong to, you will hear a special dial tone when you lift the handset.

1. "Differing display views in a HiPath 4000 environment" → Seite 111

## Picking up a call for another member of your team

You can use your own telephone to pick up calls for other telephones in your team, even while on a call (call pickup groups; consult your administrator).


**Prerequisite:** Your telephone rings briefly. "Call for:" appears on the upper display line with the station number or name of the originator; the station number or name of the caller appears on the lower line.

Confirm the option shown.

Pickup - group?

## Ringling group

You can have calls for your telephone signaled audibly at up to five other internal phones. The phone that answers the call first receives the call.

 Special features must be taken into consideration if your telephone operates with system networking via LAN → Page 102!

### Saving, displaying and deleting telephones for the ringing group

Open the menu → Page 21.


Select and confirm the option shown.

Program/Service?

Select and confirm the option shown.

\*81=Ringling group on?

Follow the display prompts (enter the internal station number).

 If your phone belongs to a ringing group, your display will show the station number or the name of the initiator on the upper line and that of the caller on the lower line.

### Removing all telephones in a call ringing group

Select and confirm the option shown.

Ringling group off?

## Uniform Call Distribution (UCD)

If configured (consult your administrator), you may belong to a group of stations (agents), to which calls are distributed.

An incoming call is always assigned to the agent idle the longest.

### Logging on and off at the beginning and end of your shift

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.

To log on, enter your identification number ("Agent:"). Consult your administrator to find out what it is.

### Logging on and off during your shift

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.

The image shows two screenshots of a mobile application interface. The top screenshot displays a menu with the following options: 'Program/Service?' (dropdown), 'UCD?' (dropdown), '\*401=Log on?' (dropdown), and '#401=Log off?' (dropdown). The bottom screenshot displays a similar menu with the following options: 'Program/Service?' (dropdown), 'UCD?' (dropdown), '#402=Not available?' (dropdown), and '\*402=Available?' (dropdown). Both screenshots include a menu icon in the top right corner and a 'or' separator between the two main options.

### Requesting and activating work time

You can request/activate work time to ensure you have enough time to wrap up the last call. Your phone is excluded from call distribution for a set period or until you log back on.



Program/Service?



Open the menu → Page 21.

Select and confirm the option shown.

UCD?

Select and confirm the option shown.

\*403=Work on?

Confirm the option shown.

or

#403=Work off?

Select and confirm the option shown.

### Turning the night service on and off for UCD



Program/Service?



Open the menu → Page 21.

Select and confirm the option shown.

UCD?

Select and confirm the option shown.

\*404=UCD night on?

Confirm the option shown.

or

#404=UCD night off?

Select and confirm the option shown.

### Display the number of waiting calls



Program/Service?



Open the menu → Page 21.

Select and confirm the option shown.

UCD?

Select and confirm the option shown.

\*405=Calls in queue?

Confirm the option shown.

don't worry about the wrong formatting, will be corrected in your final delivery.

## Special functions in the LAN

If your telephone is operating in an environment in which multiple **HiPath 3000 / OpenScape Business** and/or **OpenScape Office MX/LX** systems are interconnected via a LAN (Local Area Network, such as a proprietary PC network), you are conducting a call via the LAN (PC network).

In this instance, you must note certain particularities for some functions. These are described in this section.

### Leaving hunt group/group call

**Prerequisite:** You are part of a hunt group/group call → Page 94 in another **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX**.

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the (DISA) call number of the other **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX**.

Confirm your entry.

Enter the (DISA) station number of your phone.


Confirm your entry.

Select and confirm the option shown.

Select and confirm the option shown.

**You belong to multiple groups associated with another HiPath 3000/OpenScape Business or OpenScape Office MX/LX**

Enter group number for "directed joining/leaving".

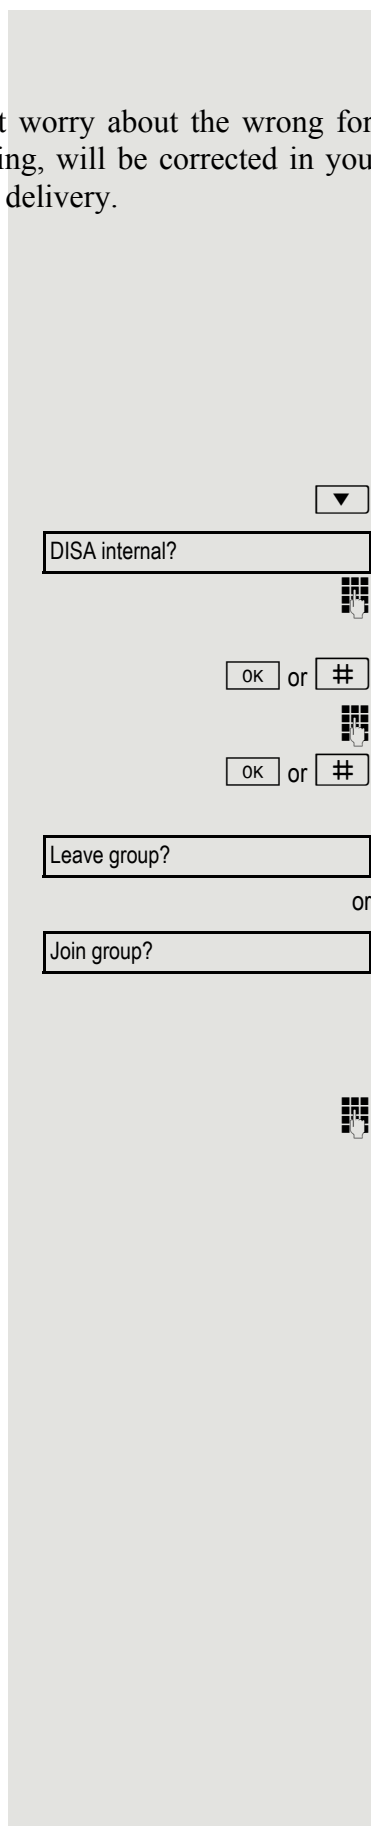

## Setting up "follow me" call forwarding

You can activate/deactivate call forwarding → Page 28 for your phone from other phones in the LAN.

Open the idle menu → Page 18.

Select and confirm the option shown.

(DISA) station number of your **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX**.

Confirm your entry.

Enter the (DISA) station number of your phone.

Confirm your entry.

### Activating

Open the idle menu → Page 18.

Select and confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the destination phone number.

Confirm the option shown.

### Deactivating

Open the idle menu → Page 18.

Select and confirm the option shown.

## Using night answer

If authorized (consult your administrator), you can define telephones in other **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX** communication platforms as the night answer → Page 54.

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the (DISA) number of the **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX** to which the night answer phone is connected.

Confirm your entry.

Enter the (DISA) station number of the phone you wish to use to activate/deactivate night answer.

Confirm your entry.

### Activating

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the destination number (= temporary night answer service).

Confirm the option shown.

### Deactivating

Open the idle menu → Page 18.

Select and confirm the option shown.

The screenshot shows a vertical menu with several options and input fields:

- A dropdown arrow at the top.
- A text field containing "DISA internal?".
- A keypad icon.
- Buttons labeled "OK" or "#".
- Another keypad icon.
- Buttons labeled "OK" or "#".
- A dropdown arrow.
- A text field containing "Night answer on?".
- A keypad icon.
- A text field containing "Save?".
- A dropdown arrow.
- A text field containing "Night answer off?".



## Ringing group

You can have calls for your telephone signaled audibly at external telephones or at telephones in other **HiPath 3000/OpenScope Business** or **OpenScope Office MX/LX** communication platforms → Page 96.

### Saving, displaying and deleting telephones for the ringing group

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm, then follow the operating instructions.

Enter the phone number.

Confirm the option shown.

Confirm the option shown.

Select and confirm the option shown.

### Removing all telephones in a call ringing group

Open the idle menu → Page 18.

Select and confirm the option shown.

The screenshot shows a vertical menu with the following items:

- Program/Service?
- \*81=Ringing group on?
- Add to ringing group?
- or
- Add another station?
- or
- Display/remove?
- #=Entry complete?
- Save?
- Exit?
- Ringing group off?

## Controlling relays (only for HiPath 3000)

If this feature is configured (consult your administrator), you can also control relays → Page 78 in other **HiPath 3000** communication platforms.

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the (DISA) station number of the **HiPath 3000** where you wish to control the relay.

Confirm your entry.

Enter the (DISA) station number of the phone you wish to use to control the relay.

Confirm your entry.

Confirm the option shown.

Select and confirm the option shown.

Enter the relay.

## Opening a door

If this feature is configured (consult your administrator), you can also activate the door opener → Page 35 in other **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX** communication platforms.

Open the idle menu → Page 18.

Select and confirm the option shown.

Enter the (DISA) station number of the **HiPath 3000/OpenScape Business** or **OpenScape Office MX/LX** where you wish to control the relay.


Confirm your entry.

Enter the (DISA) station number of the phone you wish to use to control the door opener.

Confirm your entry.

Select and confirm the option shown.

Dial the entrance telephone number.

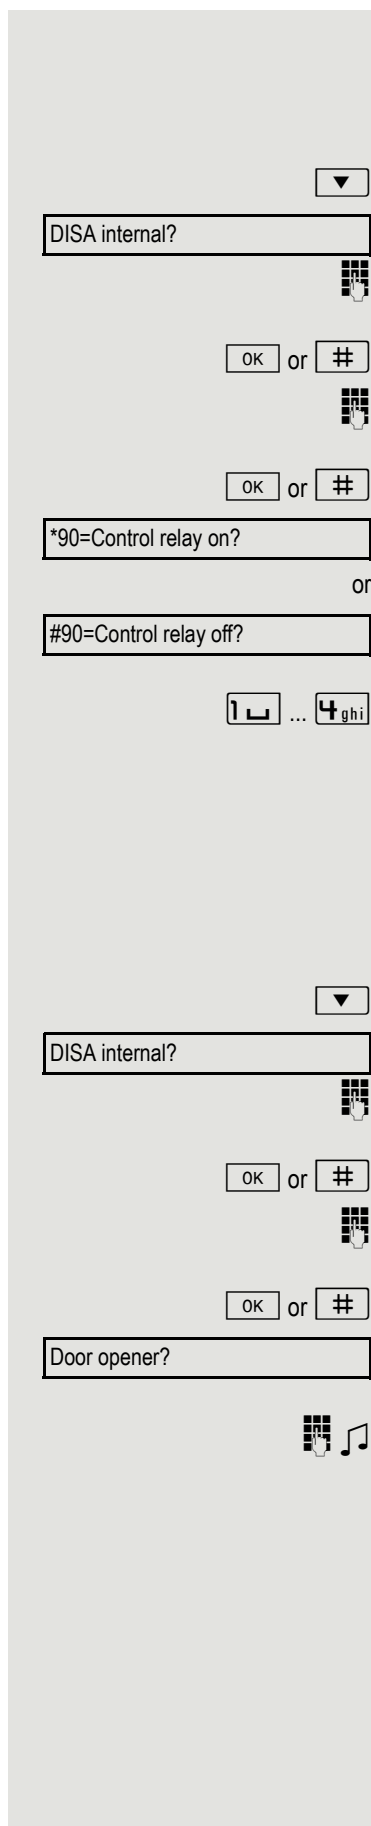

# Individual phone configuration

## Setting contrast

The display has four contrast levels that you can set according to your light conditions.

Press one of the keys shown in idle mode.

Select and confirm the option shown.

Change the display contrast. Press the key repeatedly until the desired level is obtained.

Save.

## Audio

### Setting the ring tone mode

You can use the two ring tone mode options

- HiPath
- Local ringer

to decide how the ring tone is generated on the telephone. With the setting "HiPath", the system sends the ring tone type and the dependent ring tone, which you can adjust subsequently → Page 105.

If "Local ringer" is selected, the system sends the ring tone type and you select which ring tone is required for the respective ring tone type in the "Local ringers" menu → Page 107.

You can also configure the following setting via the [web interface](#) → Page 112.

Open the menu → Page 21.

Select and confirm the option shown.

Enter and confirm the user password.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.



## Adjusting audio settings

The ring tone mode "HiPath" is set. The **OpenScape Business/HiPath 3000** sends the ring tone type and the ring tone setting to your telephone.

Optimize the audio settings on your **OpenStage 15 E** for your work environment and according to your personal requirements.

## Adjusting the receiving volume during a call

You are conducting a call.

Raise or lower the volume. Keep pressing the key until the desired volume is set.

Save.

## Adjusting the ring volume

Press one of the keys shown in idle mode → Page 18.

Confirm the option shown.

Raise or lower the volume. Keep pressing the key until the desired volume is set.

Save.

## Adjusting the ringer pitch

Press one of the keys shown in idle mode → Page 18.

Select and confirm the option shown.

To adjust the ringer pitch: Keep pressing the keys until the desired pitch is set.

Save.

## Adjusting the attention ring volume


If you are part of a team with trunk keys, other calls can be signaled acoustically in the team during a call. You will hear the attention ring.

Press one of the keys shown in idle mode → Page 18.

Select and confirm the option shown.

Raise or lower the volume. Keep pressing the key until the desired volume is set.

Save.

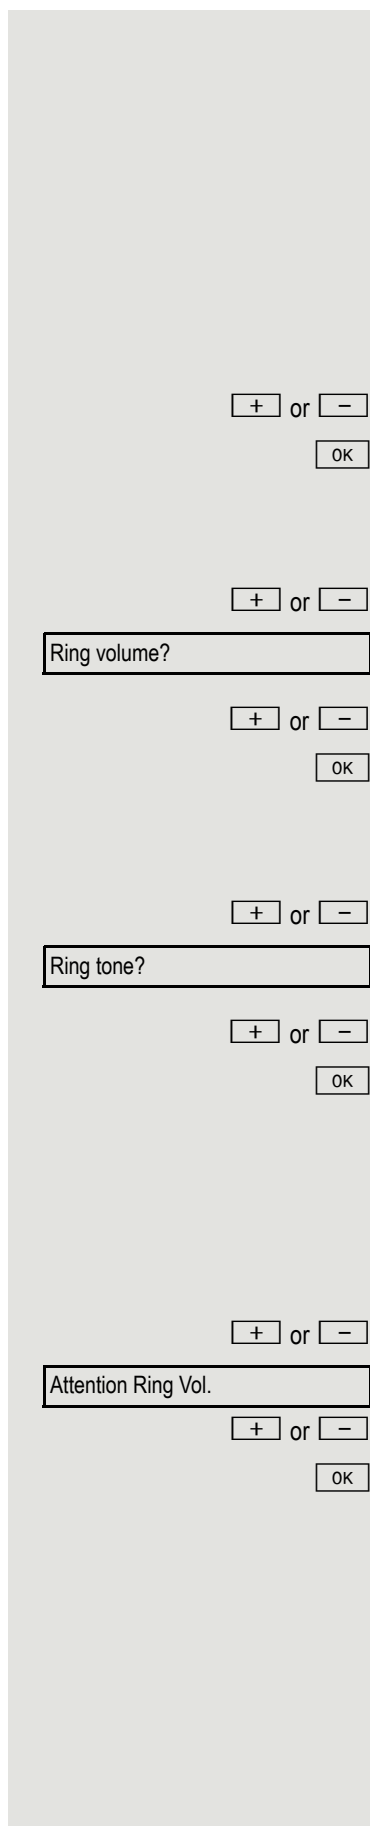

## Adjusting the speakerphone to the room acoustics

To help the other party understand you clearly while you are talking into the microphone, you can adjust the telephone to the acoustics in your environment: „T0343 Quiet room," "T0344 Normal room" and "T0345 Noisy room."

Press one of the keys shown in idle mode → Page 18.

Select and confirm the option shown.

To set the room type: Keep pressing these keys until the setting you want appears on the screen.

Save.

## Language for system functions


Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

Select the language you wish to use (e. g. "Spanish") and confirm.

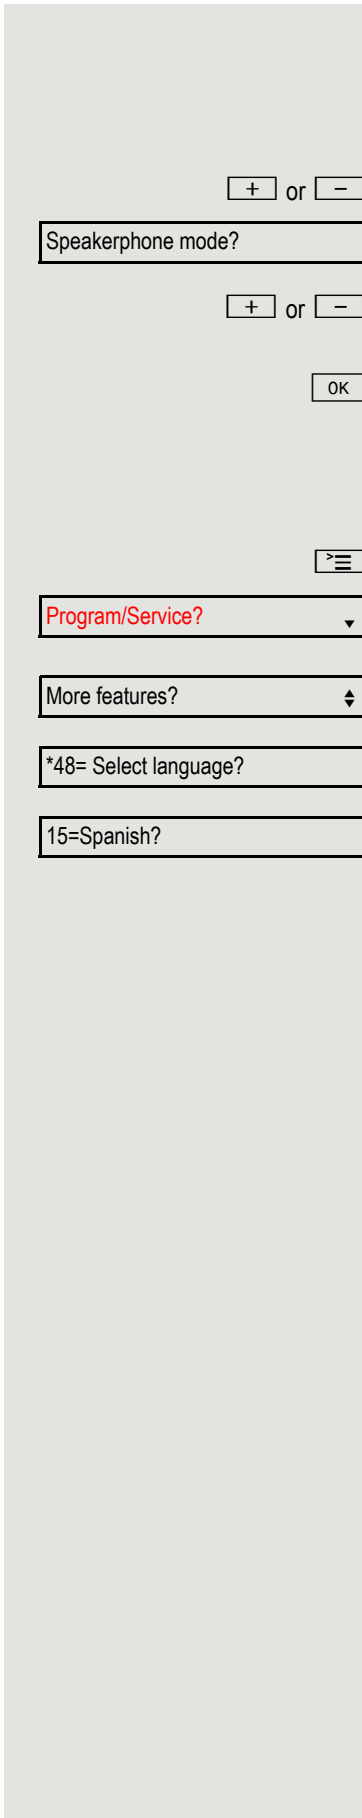

## Setting local ring tones

### Selecting and configuring the call type

The ring tone mode "Local ringer" is set. Different ring tone types are sent by the **OpenScape Business/HiPath 3000**. Not all of the following types will necessarily be used in your system configuration:

- Internal
- External
- Attention

Select the required call type and adjust to suit your requirements.

You can also configure the following setting via the **web interface** → Page 112.

Open the menu → Page 21.

Select and confirm the option shown.

Enter and confirm the user password.

Select and confirm the option shown.

Select and confirm the option shown.

For instance, select "**Internal**" and confirm the option shown.

Select the required ring tone file<sup>[1]</sup> or "pattern". You will hear the associated ring tone melody. Confirm current ring tone file.

### Settings for the ring tone "pattern"

If you selected "Pattern" as the ring tone, you can still make settings for the pattern melody and the pattern sequence:

Select and confirm the option shown.

Select the required pattern melody between 1 and 8 (e.g. **4**). You will hear the associated **Pattern melody**. Confirm the selected **Pattern melody**.

Select and confirm the option shown.

Select the required **Pattern sequence** between 1 and 6 (e.g. **2**). You will hear the set **Pattern melody** with the selected **Pattern sequence**. Confirm the selected setting.

Select and confirm the option shown.

The screenshot shows a vertical menu of configuration options on a phone's screen. At the top, there are two menu icons. Below them are several dropdown menus and input fields:

- A dropdown menu with the text "User" and a downward arrow.
- The text "if nec." followed by a keypad icon.
- A dropdown menu with the text "Ringer ?" and a downward arrow.
- A dropdown menu with the text "Local ringers ?" and a downward arrow.
- A dropdown menu with the text "Internal ?" and a downward arrow.
- An input field containing the text "ABC.wav" and a downward arrow.
- A dropdown menu with the text "Pattern melody" and a downward arrow.
- An input field containing the number "4" and a downward arrow.
- A dropdown menu with the text "Pattern sequence" and a downward arrow.
- An input field containing the number "2" and a downward arrow.
- A dropdown menu with the text "Options = Save & exit?" and a downward arrow.

1. The phone displays the current setting

## Changing the user password

Your **User password** allows you to protect your user-defined settings.

The **User password** can also be modified via the web interface → Page 112.

Open the menu → Page 21.

Select and confirm the option shown.

Enter and confirm the user password.

Select and confirm the option shown.

Select and confirm the option shown.

Enter the current password (at least six characters) and confirm your entry.


Select and confirm the option shown.


Enter the new password (at least six characters) and confirm your entry.

Select and confirm the option shown.

Enter and confirm the new password once more.

Select and confirm the option shown.

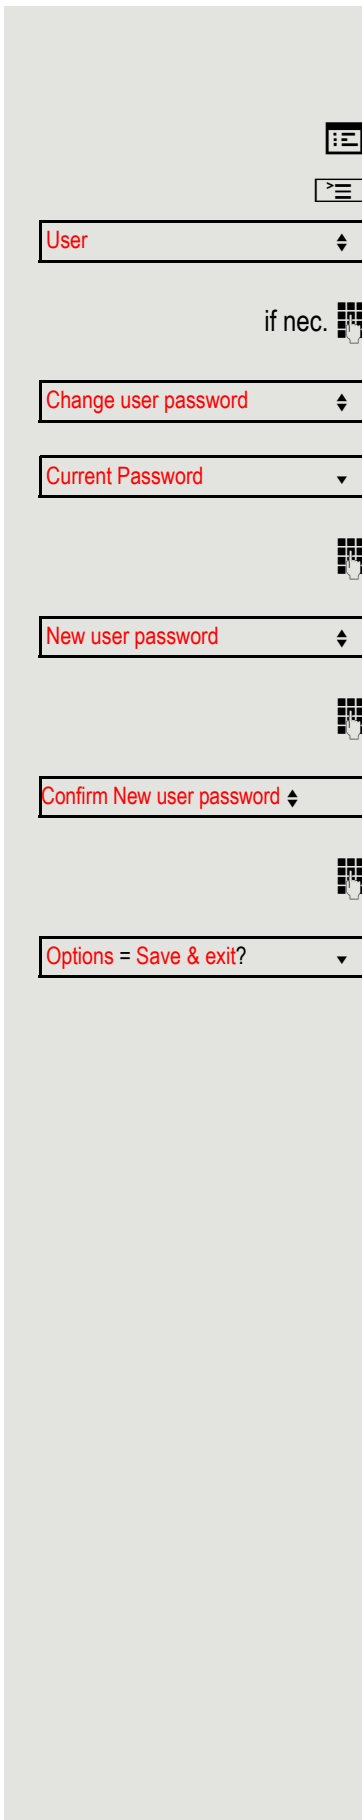

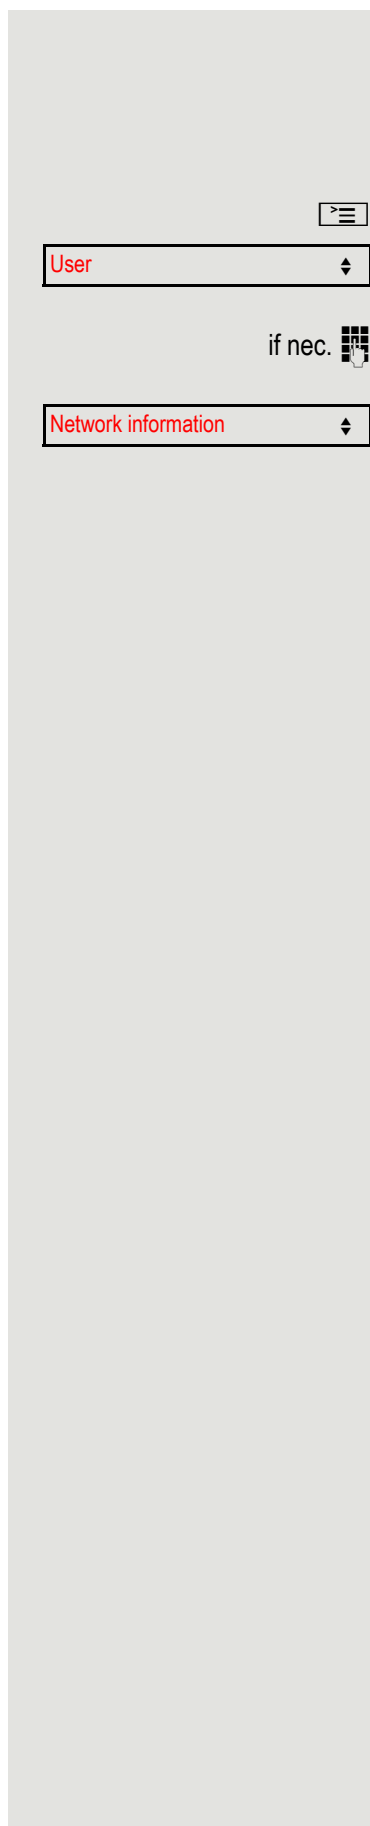

## Network information

This overview in the user area of the menu provides you with information about the IP address of the phone and the HTML address of the web interface. It also provides real-time data about the network activity of the phone.

Open the menu → Page 21.

Select and confirm the option shown.

Enter and confirm the user password.

Select and confirm the option shown. You can browse the following overview:

**IP address:** Displays the IP address or name that was assigned to the phone in the network.

**WBM URL:** HTTP address of the web interface. This address is specified in the address line of the Internet browser and is used to call the web interface of the phone in the browser.

**LAN/PC byte input:** The network or PC interface data packets received are illustrated dynamically as columns.

**LAN/PC byte output:** The network or PC interface data packets sent are illustrated dynamically as columns.

**LAN/PC autonegotiated: [Yes|No]:** Displays whether the network or PC interface data transfer rate is set to automatic (**Yes**) or manual (**No**).

**LAN/PC port speed: [10|100|1000] Mbit/s:** Data transfer rate of the network or PC interface. If an interface is not in use, **Link down** is displayed.



## Testing the phone

### Testing the phone's functionality

You can test your phone's functionality.

**Prerequisite:** The phone is in idle mode.

Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Select and confirm the option shown.

If everything is functioning correctly:

- all LEDs on the phone flash (only the menu key LED is continuously lit)
- your station number is displayed
- all pixels are active on the display
- the ring tone is audible.

### Checking the key assignment

You can check the key assignment on your phone to determine which functions are assigned to which keys.


Open the menu → Page 21.

Select and confirm the option shown.

Select and confirm the option shown.

Press any key. The key assignment is displayed.

Select and confirm the option shown.

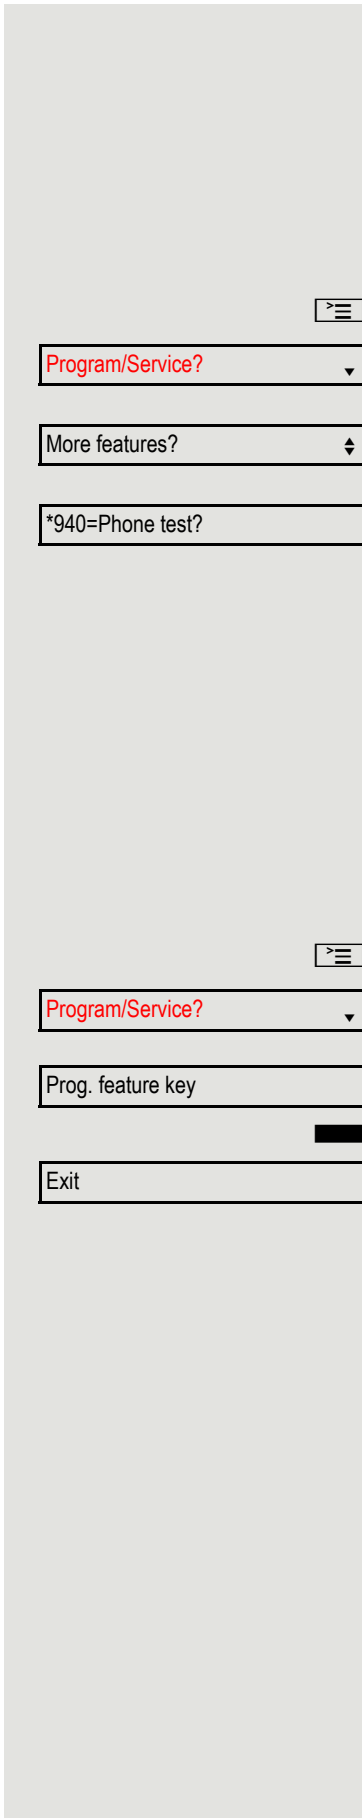

## Differing display views in a HiPath 4000 environment

Depending on the system configuration, some functions may not always be offered in the display as described in this document.

In addition, display texts may differ from those described in this document depending on the system configuration.

The following table provides an overview:

<b>HiPath 3000/OpenScape Business OpenScape Office display</b>	<b>HiPath 4000 display</b>	<b>Description</b>
Program/Service	Service menu?	→ Page 21
Transfer	Transfer?	→ Page 27
View callbacks	Show callback destinations?	→ Page 33
Pickup - directed	Directed pickup	→ Page 34
Caller list	Call list/log?	→ Page 38
Use speed dialing	Use speed dialing?	→ Page 42
Change speed dial	Speed dial?	
Call waiting trm.	Second call release?	→ Page 47
Call wait.trm. on/off	Second call on/off?	
Ringer cutoff on/off	Ringer cutoff on/off?	→ Page 63
Join/leave group	Hunt group on/off?	→ Page 94


# Web interface

## General

You can configure a number of settings for your phone via the web interface. Communication is via a secure HTTPS connection. Access to the web interface must be activated by your administrator.

## Launching the web interface

---

 For more information about the IP address, the web interface address and how to connect the telephone to the network, refer to the section entitled "Network information" → Page 109.

---

To launch the interface, open a web browser and enter the following:

**https://[IP address of the phone]**


[IP address of the phone] is the IP address of your phone.

or

**https://[Name of the phone]**

[Name of the phone] that was assigned by the administrator.

---

 You might receive a certificate notification from the browser. Follow the instructions to download the certificate.

You will be prompted to configure a user password → Page 108 the first time you call up the web interface. You must log in with this password in future every time you want to open the [User Pages](#).

---

## Administrator Pages

This area lets you configure settings for administering your phone and the network environment. Access to the [Administrator Pages](#) is protected by the admin password. For further information, consult your administrator or refer to the administration manual.

## User Pages

The web interface homepage opens once you have entered and confirmed the phone's IP address.

1. Click a menu heading to display the individual menu entries. Click the menu heading again to close the menu.
2. Click a menu entry to open the corresponding form.
3. Make the desired changes.
4. Click the corresponding button to save or discard your changes.

### Button functions

- „Login“: Log in to the phone after you have entered the user password
- „Submit“: Apply changes
- „Reset“: Reset original values
- „Refresh“: Update the values.
- „Logout“: Log out from the phone

## User menu

All settings in the user menu of the web interface can also be made via the user menu on the telephone.



### User Pages

User login  → Page 108



Authentication  → Page 108

- Old password
- User password  → Page 108
- Confirm password

### Ringer

- Ringer mode ( → Page 104)
  - HiPath
  - Local ringer
- Local ringers  → Page 107
  - Name
    - Internal
      - Ringer file
      - Pattern melody
      - Pattern sequence
    - External
      - Ring tone
      - Pattern melody
      - Pattern sequence
    - Attention
      - Ringer file
      - Pattern melody
      - Pattern sequence

### Phonebook

- Contact list  → Page 80
- New contact  → Page 80
  - Last name
  - First name
  - Number
- Delete all contacts  → Page 81
  - Confirm delete

## Fixing problems

### Responding to error messages

Incorrect input

#### Possible causes:

Station number is incorrect.

#### Possible reactions:

Enter correct station number.

Not authorized

#### Possible causes:

Locked function selected.

#### Possible reactions:

Apply to the administrator for authorization for relevant function.

Currently not possible

#### Possible causes:

Dialed a non-existent station number. Called phone is unplugged.

#### Possible reactions:

Enter correct station number. Call this station again later.

Invalid station number

#### Possible causes:

Dialed your own station number.

#### Possible reactions:

Enter correct station number.

## Contact partner in case of problems

Consult your administrator if a fault persists for more than five minutes, for example.

## Troubleshooting

### Pressed key does not respond:

Check if the key is stuck.

### Telephone does not ring:

Check whether the "Do not disturb" function is activated on your telephone (→ Page 64). If so, deactivate it.

### You cannot dial an external number:

Check whether your telephone is locked. If the phone is locked, enter your PIN to unlock it → Page 66.

### To correct any other problems:

First consult your administrator. If the problem still cannot be resolved, the administrator has to contact Customer Service.

## Care and cleaning instructions

- Never spray the phone with liquids as the penetrating fluids can lead to malfunctions or may damage the device.
- Clean the phone with a soft and slightly damp cloth.
- Do not use substances such as alcohol, chemicals, household cleaners or solvents, as these substances can lead to surface damage or cause the coating to peel.

## Labeling keys


The following options are available for labelling keys on the **OpenStage 15/15 G** and/or **OpenStage Key Module 15** with the functions assigned to them or the saved numbers on them:

Labeling

- By hand:  
Labeling strips are supplied with your **OpenStage 15/15 G** and **OpenStage Key Module 15**. Note the function or name in the white field on the strip and insert the strip on your **OpenStage 15/15 G** or **OpenStage Key Module 15**.
- With a computer via the Internet:  
You can find the "online labeling tool" together with the user interface at [http://wiki.unify/index.php/Key\\_Labeling\\_Tool](http://wiki.unify/index.php/Key_Labeling_Tool).
- Select the appropriate key labeling tool in your language. You can use the tool online via the browser or you can download it for local use.

## Local user menu

### Opening the user menu on the phone

To open the user menu, press the  key.

Select the **User** menu option. You are prompted to enter the **User password** → Page 108. Confirm this with **OK**. The options of the user menu are available.

### User menu display

The majority of settings that can be made via the user menu on the phone can also be made via the web interface → Page 112.

Changes are usually confirmed using the **Save & exit** option or discarded using the **Exit (no save)** option.

#### ⊕ **User**

#### ⊕ **Ringer?**

- **Local ringers?** → Page 107
  - 1: **Internal**
    - **Options = Save & exit**
    - **Name = Internal**
    - **Ringer sound = Ring file**
    - **Pattern melody = 2**
    - **Pattern sequence = 2**
  - 2: **External**
    - **Options = Save & exit**
    - **Name = External**
    - **Ringer sound = Ring file**
    - **Pattern melody = 2**
    - **Pattern sequence = 2**
  - 3: **Attention**
    - **Options = Save & exit**
    - **Name = Attention**
    - **Ringer sound = Ring file**
    - **Pattern melody = 2**
    - **Pattern sequence = 2**
- **Ringer mode?** → Page 104)
  - **Options = Save & exit**
  - **Mode = HiPath**
    - **Local ringer?**
    - **Back?**

#### **Change user password?**

- **Current password =** → Page 108
- **New user password =**
- **Confirm password =**
- **Options = Save & exit**



**Network information?**

- Options = Exit
- Phone address = → Page 109
- Web address =
- IP address =
- LAN RX =
- LAN TX =
- PC RX =
- PC TX =
- LAN autonegotiated = Yes
- LAN information = 10 Mbps full duplex
- PC autonegotiated = Yes
- PC information = Link down
- Back?

# Index

- A**
- Absence text ..... 70
    - Leaving ..... 70
  - Activating door opener ..... 35
  - Administrator ..... 21
  - Advisory message
    - Delete ..... 71
  - Agents ..... 97
  - Announcement ..... 43
  - Answering machine ..... 73
  - Assigning a DID number ..... 45
  - Associated dialing/dialing aid ..... 45
  - Associated service ..... 74
  - Attention ring volume ..... 105
  - Audio keys ..... 16
  - Automatic call waiting
    - Preventing/allowing ..... 47
  - Automatic connection setup ..... 44
  - Automatic trunk seizure/prime line is not active ..... 24
- C**
- Call
    - Accepting ..... 22
    - Accepting in a team ..... 90
    - Directed pickup ..... 34
    - Distributing ..... 97
    - Entrance telephone ..... 35
    - Forwarding ..... 28
    - Forwarding in a team ..... 90
    - Forwarding MSN in CO ..... 31
    - In a team with trunk keys ..... 87
    - Parking ..... 48
    - Picking up in a group ..... 96
    - Placing on hold ..... 49
    - Recording ..... 52
    - Rejecting ..... 26
    - Retrieving from hold ..... 49
    - Retrieving from park ..... 48
    - Transferring ..... 27, 90
    - Transferring after announcement ..... 52
    - Using DSS keys in a team ..... 89
  - Call charge assignment ..... 61
  - Call charges
    - For another phone ..... 60
    - For your phone ..... 60
  - Call duration ..... 60
  - Call forwarding ..... 28
    - In the event of telephone failure ..... 30
    - MSN in CO ..... 31
  - Call list ..... 20
  - Call request ..... 20
  - Call signal ..... 22
  - Call volume ..... 22, 105
  - Call waiting ..... 53
    - Accepting ..... 46
    - Tone off ..... 47
  - Call waiting tone on/off ..... 47
  - Callback ..... 32
  - Caller ID suppression ..... 64
  - Caller list, using ..... 38
  - Calling a second party ..... 27
  - Calls in queue ..... 71, 97
  - CE marking ..... 3
  - Central telephone lock ..... 66
  - CFNR ..... 29
  - Charges
    - For another phone ..... 60
    - For your phone ..... 60
  - Checking the key assignment ..... 110
  - Cleaning information ..... 116
  - Code dialing in ISDN ..... 76
  - Code lock
    - Central ..... 66
    - For phone ..... 66
  - Company ..... 21
  - Conference ..... 27
  - Connection options ..... 14
  - Connection setup
    - Automatic ..... 44
  - Consultation ..... 27
  - Control relays ..... 78
  - Controls ..... 13
  - Corporate directory ..... 83
  - CSTA ..... 78
- D**
- Details, fax ..... 73
  - Dialed number, editing ..... 37
  - Dialing
    - Dialing aid ..... 45
    - En-bloc ..... 37
    - From the caller list ..... 38
    - From the internal phonebook ..... 39
    - From the LDAP database ..... 40
    - Internal / external ..... 24
    - On-hook ..... 24
    - Using redial ..... 25
    - Using repdial keys ..... 25
    - Using speed dialing ..... 42
  - Dialing aid
    - S0 bus ..... 45
  - Dialing external calls ..... 24
  - Dialing internal calls ..... 24
  - Dialing the CO ..... 24
  - Dialpad ..... 18

- Differences ..... 11
  - Direct Inward System Access ..... 75
  - Direct station select ..... 56, 89
  - Directory
    - LDAP ..... 83
  - Directory LDAP ..... 40
  - DISA ..... 75
  - Discreet calling ..... 44
  - Display contrast ..... 104
  - Display views for
    - HiPath 4000 environment ..... 111
  - Distributing calls ..... 97
  - Do not disturb ..... 64
  - Door opener ..... 36
  - DTMF suffix dialing (tone dialing) ..... 51
- E**
- Editing a dialed number ..... 37
  - Editing number ..... 37
  - En-bloc dialing ..... 37
  - Encrypted call ..... 62
  - Entrance telephone ..... 35
  - External code ..... 24
- F**
- Fax details ..... 73
  - Forwarding ..... 28
    - Multiple subscriber number (MSN) ..... 31
  - Forwarding MSN in CO ..... 31
  - Forwarding multiple subscriber number (MSN) ..... 31
  - Function keys
    - Programmable ..... 17
  - Functions
    - For another phone on/off ..... 74
    - Programming a key ..... 55
    - Resetting ..... 74
    - Using from externally ..... 75
- G**
- General information ..... 10
  - Group call ..... 94
- H**
- Handsfree answerback ..... 34
    - Disabling ..... 34
  - Enabling ..... 34
  - HiPath 3000
    - Control relays ..... 103
    - Relays ..... 103
  - HiPath 5000
    - Group call ..... 99
    - Hunt group ..... 99
    - Night answer ..... 101
    - Opening a door ..... 103
    - Ringing group ..... 102
    - Setting up "follow me" call forwarding ..... 100
  - Holding ..... 49
    - In the team ..... 88
  - Hot line ..... 44
  - Hotline delayed ..... 44
  - Hunt group ..... 94
- I**
- Important information ..... 4
  - Incoming calls ..... 20
  - Internal phonebook ..... 39
  - IP telephony ..... 99
- K**
- Key module ..... 15
  - Keypad dialing ..... 76
  - Keys
    - Assigning ..... 55
    - Programming ..... 55
    - Save incomplete ..... 55
- L**
- LAN telephony ..... 99
  - LDAP ..... 83
  - LDAP directory ..... 40
  - LED displays
    - DSS keys ..... 17
    - Function keys ..... 17
    - Line/trunk keys ..... 87
  - LED messages, understanding ..... 56, 89, 92
  - Line key ..... 86
  - Line utilization ..... 86
  - Location of the telephone ..... 4
  - Locking/unlocking ..... 66
  - Loudspeaker ..... 23
- M**
- Mailbox key ..... 13, 16
  - Making mobile calls ..... 71
  - Menu ..... 21

Menu key .....	13, 16
Message (text)	
Answer .....	70
Deleting/viewing .....	69
Receiving .....	70
Sending .....	69
MULAP keys, trunk keys .....	86
MULAP privacy release .....	88
MultiLine phone .....	12

## N

Name plate .....	11
Navigation keys .....	16
Night answer .....	54
Non-secure call .....	11, 62

## O

Open listening .....	24
Opening a door .....	35
Using a code .....	35
OpenStage 15	
Speakerphone mode .....	23
Adjusting the room acoustics .	106
Tips .....	11, 23
OpenStage Key Module 15 .....	15
Operating instructions .....	3
Operating steps	
Programming a key .....	58
Outgoing calls .....	20
Overload indication .....	71
Override .....	53

## P

Parking a call .....	48
Personal .....	21
Personal identification number .....	67
Phone	
Locking .....	66
Locking another .....	66
Locking/unlocking .....	66
Locking/unlocking centrally .....	66
Setting .....	104
Testing .....	110
Using another phone like your own .....	71
Phone settings .....	104
Phonebook	
Local phonebook	
New contact .....	80
Pickup (call) .....	34, 96
PIN .....	67
PIN, saving .....	67

Primary line .....	86
Private line .....	86
Procedure	
Programming a key .....	58
Product name .....	11
Product variants .....	11
Program/Service menu .....	21
Programmable function key .....	17
Programming free keys .....	55
Programming your telephone .....	104
Project calls .....	61
Project code, account code .....	61

## Q

Quick search .....	85
--------------------	----

## R

Radio paging equipment (PSE) .....	79
Recall .....	52
Receiving volume .....	22, 105
Recording .....	52
Redialing a number .....	25
From the caller list .....	38
Relays .....	78
Reserve trunk .....	44
Reserving trunk .....	44
Reset services .....	74
Resetting functions .....	74
Ring tone .....	105
Ring transfer	
In an executive/secretary team .....	93
Ring volume .....	105
Ringer cutoff .....	63
Ring group .....	96
Room monitor .....	65
Room monitoring .....	65

## S

Safety notes .....	3
Searching for a contact .....	82, 83
Second call	
Accepting .....	46
Allowing .....	47
Preventing .....	47
Second level .....	25
Secondary line .....	86
Secure call .....	11, 62
Connection status .....	63
Encrypted call .....	62
Tips .....	63
Unencrypted call .....	62

Sensors .....	79
Serial number .....	11
Settings .....	104
Settings on your telephone .....	104
Shared line .....	86
Shift .....	25
Shift key .....	25
SingleLine phone .....	12
Speaker call .....	43
Speakerphone distance .....	4
Speakerphone mode	
Adjusting the room acoustics .....	106
Function .....	23
Setting the volume .....	106
Tips .....	11, 23
Special dial tone .....	64
Speed dial	
Dialing .....	42
Saving station speed dialing .....	42
Suffix dialing .....	42
System .....	42
Station number	
Assigning .....	45
Correcting .....	37
Deactivating display .....	64
Saving .....	59
Suppression .....	64
Station speed dialing .....	42
Suffix dialing	
Automatic .....	42
DTMF tone dialing .....	51
System speed dialing .....	42
System-wide cancellation .....	74

## T

Telephone data service .....	77
Telephone maintenance .....	116
Telephone test .....	110
Temporary phone .....	71
Testing the phone's functionality .....	110
Testing the telephone .....	110
Three-party conference .....	27
Timed reminder .....	68
Timed reminder, answering .....	69
Toggle/connect .....	27
In the team .....	88
Tone dialing .....	51
Trace call .....	65
Transferring (call) .....	27, 90
After announcement .....	52

Troubleshooting .....	116
Trunk flash .....	53
Trunk seizure, automatic .....	24

## U

Unanswered calls .....	20
Unencrypted call .....	62, 63
Uniform Call Distribution .....	97
User .....	21
User password .....	108
User support .....	10
Using Ethernet switches .....	14
Using network ports more efficiently .....	14

## V






Variable call forwarding .....	28
Voice encryption .....	11, 62
Connection status .....	63
Encrypted call .....	62
Tips .....	63
Unencrypted call .....	62
Volume, keys .....	16






## W






Waiting calls .....	71
Web interface .....	112, 117
Wrap-up time .....	98

## Overview of functions and codes (alphabetical)






The following table lists all available functions, as shown on the display. If configured (consult your administrator), functions can be activated interactively (select and confirm) or via the Program/Service menu (select and confirm or enter a code).

Functions (=display)	... Interact- ively	... Via the Program/Service menu		... With Press
	 	 → Page 21  	Code	
Call waiting	✓	✓	*55	X
Waiting tone off	✓	✓	*87	X
Waiting tone on	✓	✓	#87	X
Call wait.trm.on		✓	*490	X
Call wait.trm.off		✓	#490	X
Headset				X
Answer call	✓			
Reject calls	✓			
Release				X
Caller list	✓	✓	#82	X
Save number	✓	✓	*82	X
DND on	✓	✓	*97	X
DND off	✓	✓	#97	X
Uniform Call Distribution				
Log on		✓	*401	X
Log off		✓	#401	X
Available		✓	*402	X
Not available		✓	#402	X
Work on		✓	*403	X
Work off		✓	#403	X
UCD night on		✓	*404	X
UCD night off		✓	#404	X
Calls in queue		✓	*405	X
Advisory msg. on	✓	✓	*69	X
Advisory msg. off	✓	✓	#69	X
Associated services		✓	*83	X
Associated dialing		✓	*67	X
Override	✓	✓	*62	X
Room monitor		✓	*88	X
En-bloc dialing				
Dialing	✓			

Functions (=display)	... Interact- ively	... Via the Program/Service menu	Code	... With Press
	 	 → Page 21  		
Data I/O service			*494	X
Reset services		✓	#0	X
Speaker call		✓	*80	X
HF answerback on	✓	✓	*96	X
HF answerback off	✓	✓	#96	X
DISA				
DISA internal	✓	✓	*47	X
Discreet calling			*945	X
Shift				X
Phone test		✓	*940	
Trace call		✓	*84	X
Temporary phone		✓	*508	X
Join group	✓	✓	*85	X
Leave group	✓	✓	#85	X
Rejoin all groups	✓	✓	*85*	X
Leave all groups	✓	✓	#85#	X
Hotline				
Send message	✓	✓	*68	X
View sent message	✓	✓	#68	X
View messages	✓	✓	#68	X
Mailbox				X
Keypad dialing		✓	*503	
Conference	✓	✓	*3	X
Start conference	✓			
Adding a party	✓			
End conference	✓	✓	#3	
View conf parties	✓	✓		
Remove party	✓	✓		
Drop last conf. party			*491	
Show call charges (own phone)		✓	*65	X
Query call charges (third-party phone)				X
Use speed dialing		✓	*7	X
Change speed dialing (station)		✓	*92	X
Reserve trunk	✓			X
Toggle/connect	✓	✓	*2	X
DTMF dialing		✓	*53	X
Mute on		✓	*52	X
Mute off		✓	#52	X

Functions (=display)	... Interact- ively	... Via the Program/Service menu	Code	... With Press
	 	 → Page 21  		
Mobile Login (log off)			#9419	X
Mobile Login (log on)			*9419	X
Night answer on	✓	✓	*44	X
Night answer off	✓	✓	#44	X
Parking a call		✓	*56	X
Retrieve call		✓	#56	
Page				
Answer page (not for U.S.)		✓	*59	
Account code		✓	*60	X
Consultation	✓			X
Return to held call	✓	✓	*0	
Quit and return	✓	✓	*0	
Transfer/Pick up call	✓			
Callback	✓	✓	*58	X
View callbacks/delete	✓	✓	#58	
Suppress call ID	✓	✓	*86	X
Restore caller ID	✓	✓	#86	X
Temporary MSN (not for U.S.)	✓	✓	*41	X
Ring Transfer: On		✓	*502	X
Ring Transfer: Off		✓	#502	X
Ringing group on		✓	*81	X
Ringing group off		✓	#81	X
Ringer cutoff on	✓	✓	*98	X
Ringer cutoff off	✓	✓	#98	X
Control Relay On (only for HiPath 3000)		✓	*90	X
Control Relay Off (only for HiPath 3000)		✓	#90	X
Trunk flash		✓	*51	X
Select language		✓	*48	
Lock phone	✓	✓	*66	X
Unlock phone	✓	✓	#66	X
Change PIN		✓	*93	
Directory				
1=internal	✓		*54	X
2=LDAP	✓		*54	X
Telephone data service			*42	



Functions (=display)	... Interact- ively	... Via the Program/Service menu	Code	... With Press
	 	 → Page 21  		
Timed reminder on		✓	*46	X
Timed reminder off		✓	#46	X
Door opener on		✓	*89	X
Door opener off		✓	#89	X
Door opener		✓	*61	X
Transferring	✓			
Pickup - directed		✓	*59	X
Pickup - group	✓	✓	*57	X
Picking up a call	✓			
Forwarding on	✓	✓	*1	X
1=all calls	✓	✓	*11	X
2=external calls only	✓	✓	*12	X
3=internal calls only	✓	✓	*13	X
Forwarding off	✓	✓	#1	X
CFNR on		✓	*495	X
CFNR off		✓	#495	X
Trunk FWD on	✓	✓	*64	X
Trunk FWD off	✓	✓	#64	X
Redial	✓			X
Retrieve line		✓	*63	X
Lock all phones		✓	*943	X