

Content:

Dimension:

*Dimension in mm

EAN	W	lm	K	CRI	Ta (°C)	V	Hz	Dim	kg
8719157015257	13	1250	2700	80	-20~+35	220-240	50/60	ND	1
	13	1400	3000/4000	80	-20~+35	220-240	50/60	ND	1
8719157015264	13	1250	2700	80	-20~+35	220-240	50/60	ND	1
	13	1400	3000/4000	80	-20~+35	220-240	50/60	ND	1

Inrush current

Driver: LF-GIF022YF0350H

Inrush current I_{peak} (A): 18

Inrush current T_{width} (µs): 180

Input voltage 230V

Input voltage 230V, measured at 50% I_{total}

Circuit Breaker:

Item	13W
B16	60pcs
C16	104pcs

1

2

input cable: 3x1.5mm² (H05RN, H05RF)

3

4

5

6

7

8

EN The luminaire shall be installed and maintained by a qualified electrician, in accordance with the national regulations in each country. The luminaire contains no replaceable parts. In case of the luminaire is damaged, it shall be exclusively replaced by the manufacturer or authorized dealer. Keep the operating manual for later use. The manufacturer is not responsible for the incorrect use and assembly of this product.



NL De armatuur dient te worden geïnstalleerd en onderhouden door een erkend installateur, in overeenstemming met de nationale regelgeving in het betreffende land. De armatuur bevat geen vervangbare onderdelen. Indien de armatuur is beschadigd dient deze enkel te worden vervangen door de fabrikant of door een erkende dealer. Bewaar de handleiding voor later gebruik. De fabrikant is niet verantwoordelijk voor onjuist gebruik en/of installatie van dit product.

DE Die Leuchte muss von einem qualifizierten Elektriker gemäß den nationalen Vorschriften in jedem Land installiert und gewartet werden. Die Leuchte enthält keine austauschbaren Teile. Falls die Leuchte beschädigt ist, wird sie ausschließlich durch den Hersteller oder den autorisierten Händler ersetzt. Bewahren Sie die Bedienungsanleitung für spätere Verwendung auf. Der Hersteller ist nicht verantwortlich für die unsachgemäße Verwendung und Montage dieses Produktes.

FR Le luminaire doit être installé et entretenu par un électricien qualifié, conformément à la réglementation nationale de chaque pays. Le luminaire ne contient pas de pièces remplaçables. Dans le cas où le luminaire est endommagé, il doit être remplacé exclusivement par le fabricant ou le revendeur agréé. Conservez le mode d'emploi pour une utilisation ultérieure. Le fabricant n'est pas responsable de l'utilisation et du montage incorrects de ce produit.


IT L'apparecchio deve essere installato e mantenuto da un elettricista qualificato seguendo le normative nazionali di riferimento. L'apparecchio non contiene parti sostituibili. In caso di rottura sarà sostituito esclusivamente dal produttore o da un rivenditore autorizzato. Conservate il manuale di installazione per eventuali utilizzi successivi. Il produttore non è responsabile per l'utilizzo ed il montaggio non corretto di tale apparecchio.

ES La luminaria debe de ser instalada y mantenida por un electricista cualificado, siguiendo las regulaciones nacionales de cada país. La luminaria contiene partes no reemplazables. En el caso de que la luminaria sea dañada, deberá ser reemplazada exclusivamente por el fabricante o distribuidor autorizado. Guarde el manual para usos posteriores. El fabricante no es responsable por el uso e instalación incorrecta de este producto.

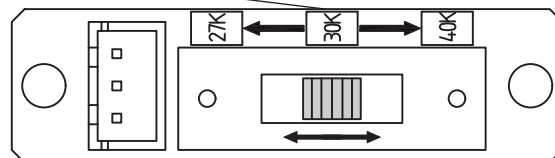

The diagram shows the back of the device with the following components:

- Detection Range:** A table with two rows. Row I has a solid black circle and "100%". Row II has an open circle and "50%".
- Hold Time:** A table with four rows. Row I has two solid black circles and "5S". Row II has one solid black circle and "1min". Row III has one open circle and "3min". Row IV has one open circle and "10min".
- Daylight Sensor:** A table with two rows. Row I has a solid black circle and "Disable". Row II has one open circle and "30lux".
- Up/Down Indicator:** A vertical slider with a solid black circle at the top and an open circle at the bottom.
- Input/Output Terminals:** A section with four terminals labeled "0.50-0.75 INPUT OUTPUT". Each terminal has an upward arrow and a label below it: "L", "N", "N", "L".
- Wiring Terminals:** A section with four terminals labeled "1", "2", "3", "4". Each terminal has a corresponding colored wire (red, blue, green, and black) connected to it.



Detection area: 100%	Mounting height: 2.5-5m/8.2-16.4ft (ceiling mounted)
Hold time: 5s	Detection range: Radius, 3-6m/9.84-19.68ft (ceiling mounted)
Daylight threshold disable	Operating temperature: -25°C~+60°C
Operating voltage: 220-240VAC, 50/60Hz	Motion detection: 0.5~1.5m/s
Microwave power: <0.3mW	Microwave frequency: 5.8GHz±75MHz

Noxion B.V.
Schootense Dreef 27,
5708 HZ Helmond,
The Netherlands
+31 (0)85 - 303 29 82
www.noxion.com
info@noxion.com
Page 1 of 1