

Engineering Specification

Model No. **EFL-0632X**

6.3inches High resolution LCD Monitor



- **NEC TFT LCD Panel**
- **High performance up-Scaling characteristic**
- **Automatic Scanning**
- **Enhanced Video Quality**
- **Power Supply with enhanced Design Margin**
- **Test Pattern for Burn-in & Self Check**
- **Option**
 - **Touch Screen(3M, ...)**

Model No. : EFL-0632X		Page : 1 of 10
Approval No.:6.3-NEC-STD	Revision No.: 2.2	

Table of Contents

1. GENERAL DESCRIPTION	3
1-1. Overview	3
1-2. FCC RF INTERFERENCE STATEMENT	3
1-2. Quick reference table of Characteristics	4
2. USER CONTROL & OSD	5
2-1. Key Control Board	5
2-2. OSD Menu Screen	6
2-3. OSD Control Functions	7
3. CONNECTOR PIN DESCRIPTIONS	7
3-1. 15 Pin D-SUB Connector	8
3-2. Serial(RS-232C) Connector	8
4. STANDARD DISPLAY MODE	8
5. MECHANICAL STRUCTURE	10

1. GENERAL DESCRIPTION

1-1. Overview

Effinet open frame LCD Monitor EFL-0632X is a high performance TFT LCD monitor providing high quality image from the analog RGB input.

This monitor supports wide range signal input from VGA to XGA resolution at vertical refresh rate of 60 to 75Hz. It includes integrated signal processing unit, named LSP(LCD Signal Processor), which had all electronic function for user application.

It is designed for industrial use with Auto power on, up scaling performance adequate for low-resolution application and enhanced design margin for reliability

1-2. FCC RF INTERFERENCE STATEMENT

NOTE :

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio, TV technical for help.
- Only shielded interface cable should be used.

Finally, any changes or modifications to the equipment by the user not expressly approved by the grantee or manufacturer could void the users authority to operate such equipment.

Model No. : EFL-0632X		Page : 3 of 10
Approval No.:6.3-NEC-STD	Revision No.: 2.2	

1-2. Quick reference table of Characteristics


Panel	Size	6.3" Diagonal
	Active Display Area	129.02 x 96.77 mm
	Type No.	NEC, NL10276BC12
	Number of Pixels	1024 (H) x 768 (V)
	Pixel Arrangement	RGB Vertical Stripe
	Pixel Pitch	0.126 mm x 0.126 mm
	Color Depth	16.7M True Color
	Surface Treatments	Hard Coating (3H), Haze 44%
	Viewing Angle (CR $\geq$ 10)	Horizontal : Θ L 60 degrees Θ R 60 degrees Vertical : Φ H 45 degrees Φ L 60 degrees
	Contrast Ratio	Typ.500 : 1
	Response Time	Rise time(tr) : 6ms(Typ.) Fall time(tf) : 15ms(Typ.)
	Average Brightness	Typ. 250 cd/ m ²
	Frame Rate	Typ. 60Hz
	Panel Dimension	(WHD) 178.8 x 126.8 x 12.0 mm
Scanning Frequency	CCFT	2 Lamp
	Horizontal	30 ~ 60KHz
	Vertical	50 ~ 75Hz

Resolution	Prime	1024 x 768 @ 60 Hz
	Standard	720x400 @70 Hz, 640x480 @60/67/72/75 Hz 800x600 @56/60/72/75 Hz 1024x768 @60/70/75 Hz
Input Signal	RGB (Video / Sync)	RGB Analog (0.7Vp-p, 75ohms) / H/V Separate(TTL)
Sync	Type	Separate H/V sync, Composite, SOG(Sync-On-Green)
	Level	TTL level (V high $\geq$ 2.0V, V low $\leq$ 0.8V)
	Polarity	Positive or Negative

Input Signal Interface	RGB	15pin D-Sub
Power	AC Input	AC 90 ~ 265V @60/50Hz, Universal Power
	max. power dissipation	12Watts
	DC Adaptor Rating	DC 12V 3A
Regulation(Safety , Ergonomics, EMC)		CUL(UL+CSA), CE
Environmental Conditions	Operating	Temperature : 10 to 50°C / Humidity : 8 to 80%
	Storage	Temperature : -20 to 60°C / Humidity : 5 to 90%
White Color Temperature		6500°K : CIE $x=0.313\pm0.015$ / $y=0.329\pm0.015$
Demonstrated MTBF		More than 20,000 hours
Touch Screen (Optional)	Touch Panel	3M Touch / 13-4041-01
	Controller	EXII-1760SC
	Controller Interface	Serial Interface

2. USER CONTROL & OSD

2-1. Key Control Board


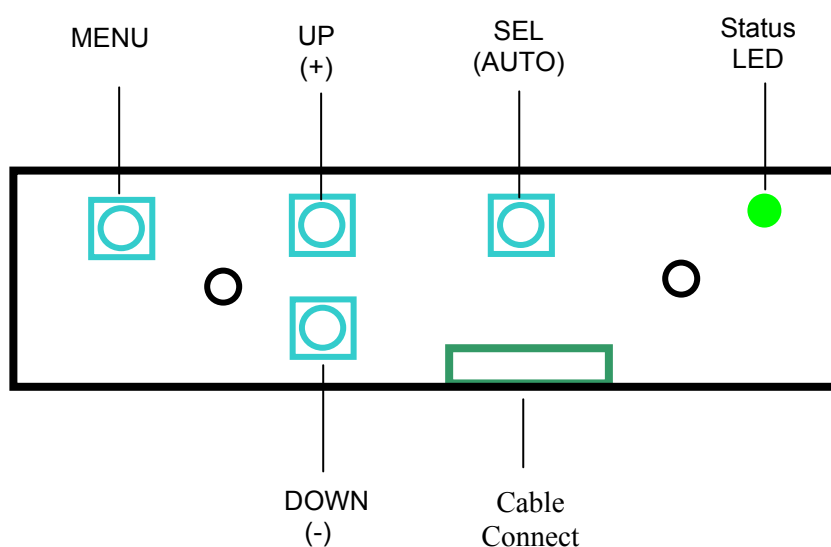


SWITCH NAME	SWITCH FUNCTIONS
-------------	------------------

Model No. : EFL-0632X		Page : 5 of 10
Approval No.:6.3-NEC-STD	Revision No.: 2.2	

MENU	• Activate / Deactivate the OSD Menu Window. • Move cursor to Sub Menu from Main menu.
SEL (AUTO)	• Move cursor in the Sub-Menu(Brightness ↔ Mode) • Auto Tracking (Pressing “SEL” key)
UP(+)	• Move cursor at Main Menu(Picture / Utility) • Increase the value of the selected function
DOWN(-)	• Move cursor at Main Menu(Picture / Utility) • Decrease the value of the selected function.

2-2. OSD Menu Screen

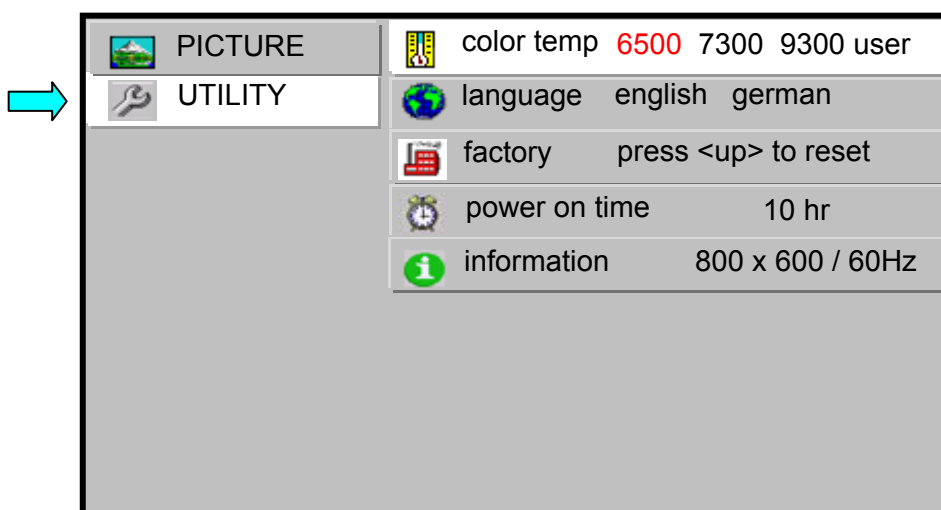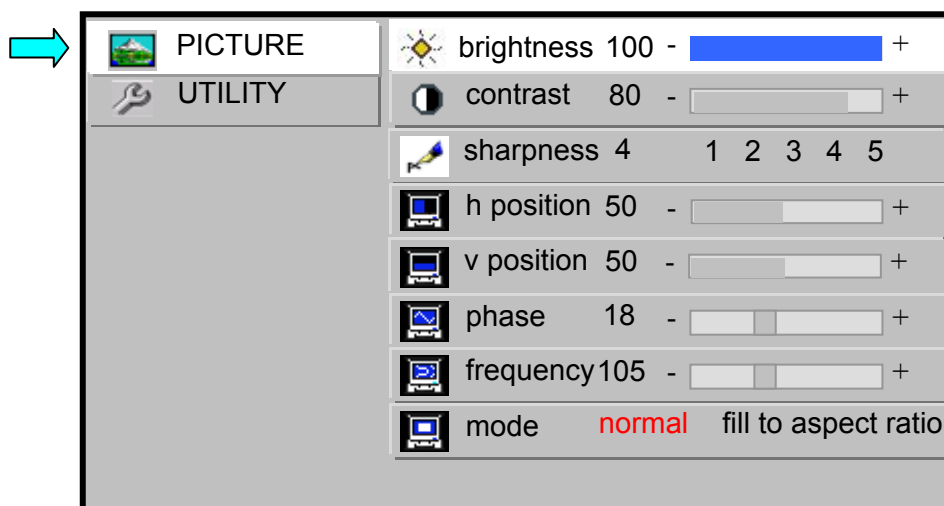


2-3. OSD Control Functions

CONTROL	FUNCTION
Auto Tracking	Automatic screen adjustment process. If there is any noise on the screen or screen shift, just press “SEL” button. Since this monitor is equipped with “Auto Tracking” function, it will automatically configure the monitor setting.
Brightness	Adjust the brightness level of the Display
Contrast	Adjust the contrast level of the Display.
Sharpness	Adjust the sharpness level of the Display.
H position	Adjust the position of the display horizontally.
V position	Adjust the position of the display vertically.
Phase	Adjust the clock phase of the display.
Frequency	Adjust the clock frequency of the display
Mode	Select the video aspect ratio. It depends on the input video format.
Color Temp	Choose different preset color temperatures (6500/7300/9300) or set your own customized color parameters.
Red /Green / Blue GAIN	Adjust the Red/ Green / Blue Gain
Language	Select the OSD language
Factory	Recall the factory setting value.
Power On time	Displayed the total power on time.
Information	Displayed the resolution of input signal
Self Test Pattern	To enter auto burn-in mode, press “Up” key first and then “Sel” key simultaneously for 3 seconds. On this mode, Red – Green – Blue – White – Black test pattern will be displayed. Press Menu key for returning normal display mode.


3. CONNECTOR PIN DESCRIPTIONS

Model No. : EFL-0632X		Page : 7 of 10
Approval No.:6.3-NEC-STD	Revision No.: 2.2	

3-1. 15 Pin D-SUB Connector

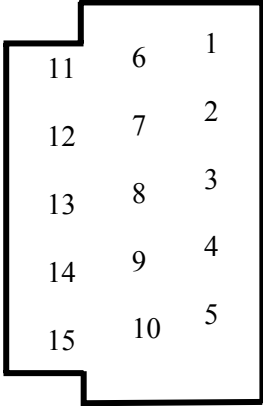Shape and pin number	Pin	Description	Pin	Description
	1	Red	9	No Connection
	2	Green	10	Ground - Sync
	3	Blue	11	No Connection
	4	Ground	12	No Connection
	5	Ground	13	Horizontal Sync
	6	Ground - Red	14	Vertical Sync
	7	Ground - Green	15	No Connection
	8	Ground - Blue		

3-2. Serial(RS-232C) Connector

Shape and pin number	Pin	Description	Pin	Description
	1	DCD	6	DSR
	2	RXD	7	RTS
	3	TXD	8	CTS
	4	DTR	9	N/A
	5	Ground		

4. STANDARD DISPLAY MODE

Model No. : EFL-0632X		Page : 8 of 10
Approval No.:6.3-NEC-STD	Revision No.: 2.2	

No.	Mode	Resolution	Horizontal		Vertical		Pixel clock
			Frequency	Polarity	Frequency	Polarity	
1	VGA	720 x 400	31.47 KHz	N	70.0 Hz	P	28.322 MHz
2		640 x 480	31.47 KHz	N	60.0 Hz	N	25.175 MHz
3		640 x 480	35.00 KHz	N	66.7 Hz	N	30.240 MHz
4		640 x 480	37.86 KHz	N	72.8 Hz	N	31.500 MHz
5		640 x 480	37.50 KHz	N	75.0 Hz	N	31.500 MHz
6	SVGA	800 X 600	35.16 KHz	N / P	56.3 Hz	N / P	36.000 MHz
7		800 X 600	37.88 KHz	P	60.3 Hz	P	40.000 MHz
8		800 X 600	48.08 KHz	P	72.2 Hz	P	50.000 MHz
9		800 X 600	46.87 KHz	P	75.0 Hz	P	49.500 MHz
10	XGA	1024 X 768	48.36 KHz	N	60.0 Hz	N	65.000 MHz
11		1024 X 768	56.49 KHz	N	70.1 Hz	N	75.000 MHz
12		1024 X 768	60.02 KHz	P	75.0 Hz	P	78.750 MHz

5. MECHANICAL STRUCTURE

