

Shield Board for Use with DC2321A Dust Demo Board

DESCRIPTION

Demonstration circuit DC2510A is a shield board for use with the DC2321A Dust application demo board. This board is designed to allow users to built their own custom application circuits directly on the DC2321A with access to all pins of the [LTP5901-IPM](#) Dust mote.

The board offers footprints of common sensor and IC packages as well as prototyping space for routing. The following footprints are included on the board:

TOP

- MSSOP-10 (×2)
- TS8 (×2)
- SOIC-20 (×2)
- DFN-20 (×2)

BOTTOM

- SOT-23 (×4)
- TSOT-23-8 (×2)
- SSOP-20 (×2)

Power rails and grids of copper pads (in both 2mm and 2.54mm pitch) form a solderable breadboard, and the IC footprints allow easy mounting of surface-mount packages. Each pin on the footprints and headers also connects to a copper-plated hole for easy wiring.

Each energy harvesting circuit on the DC2510A hosts input turrets for connecting solar panels, thermoelectric

generators, piezoelectric devices, or any other high impedance source.

The headers on the board are designed to fit into the LTP5901-IPM header layout on the DC2321A. The long pins of the headers allow wiring below the board and give users a place to clip grabber leads.

The headers are also stackable, allowing multiple DC2510A boards to be connected vertically, all with access to the pins on the DC2321A. This allows a user to create different applications on multiple DC2510A boards and swap them out or combine them as desired.

Please refer to the DC2321A demo manual and LTP5901-IPM data sheet for operation information and input limits. The application section of this demo manual describes the system level functionality of this board and the various ways it can be used in early design prototyping.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2510A>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

BOARD PHOTO

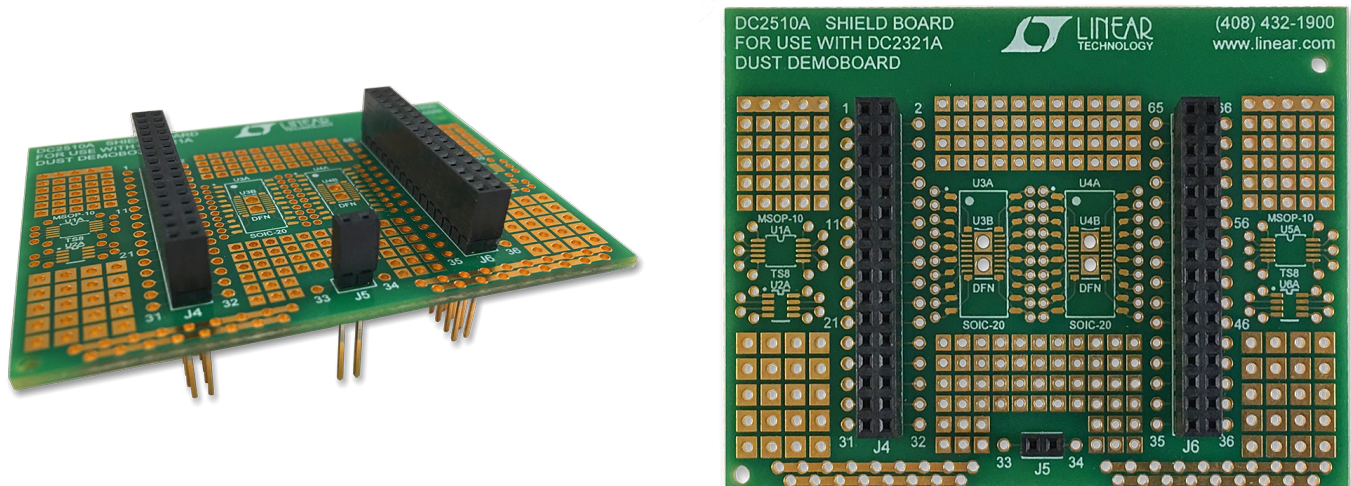


Figure 1. DC2510A

dc2510af

ABSOLUTE MAXIMUM RATINGS

Supply Voltage on VSUPPLY	4.20V
Input Voltage on ADC Inputs	1.98V
Voltage on Any Digital I/O Pin	−0.3V to VSUPPLY + 0.3V

SPECIFICATIONS

PIN TYPE	PIN	PARAMETER	MIN	TYPICAL/ DEFAULT	MAX	UNITS
Power	VSUPPLY		2.1	3.3	3.76	V
I/O	ADCs	Input Voltage Range	0		1.8	V
	GPIO, UART, I ² C, SPI	Low Input Voltage	−0.3		0.6	V
		High Input Voltage	VSUPPLY −0.3		VSUPPLY +0.3	V
		Low Output Voltage			0.4	V
		High Output Voltage	VSUPPLY −0.3		VSUPPLY +0.3	V
		Pull-Up/Pull-Down Resistance		50		kΩ

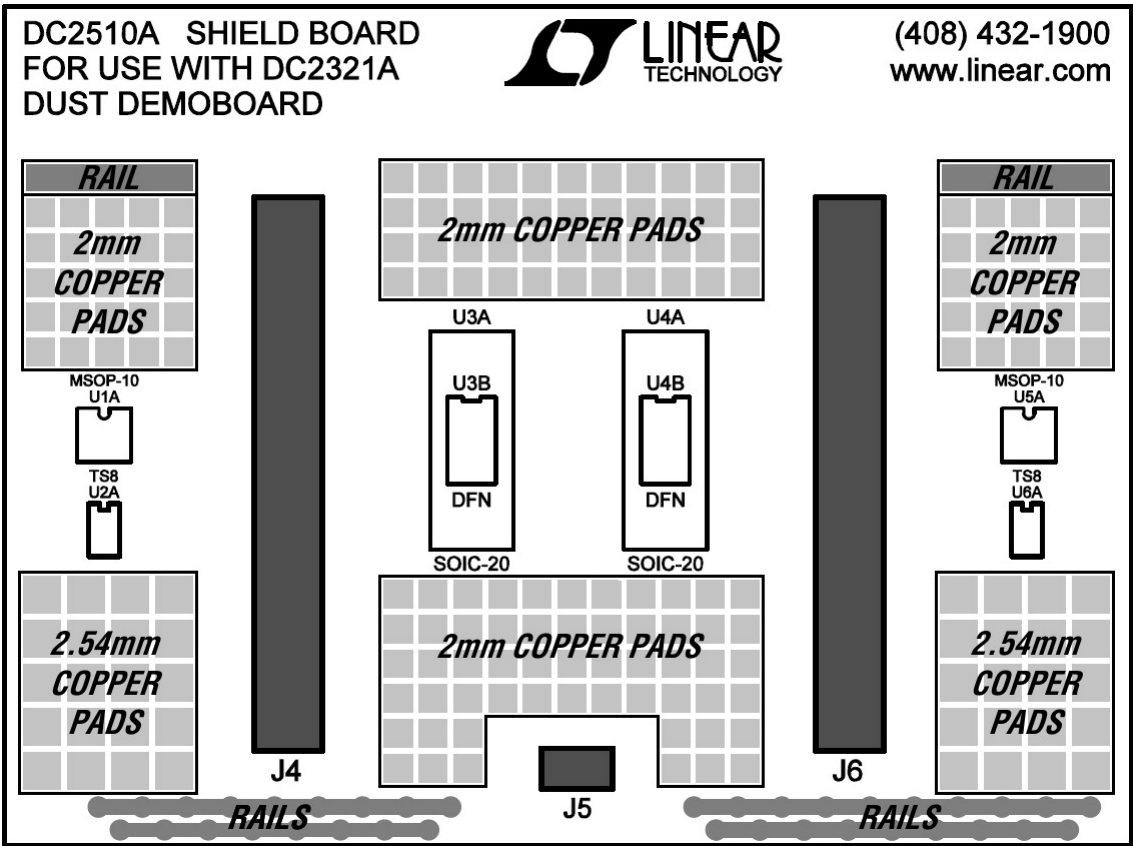


Figure 2. Board Layout Organization Diagram

SPECIFICATIONS

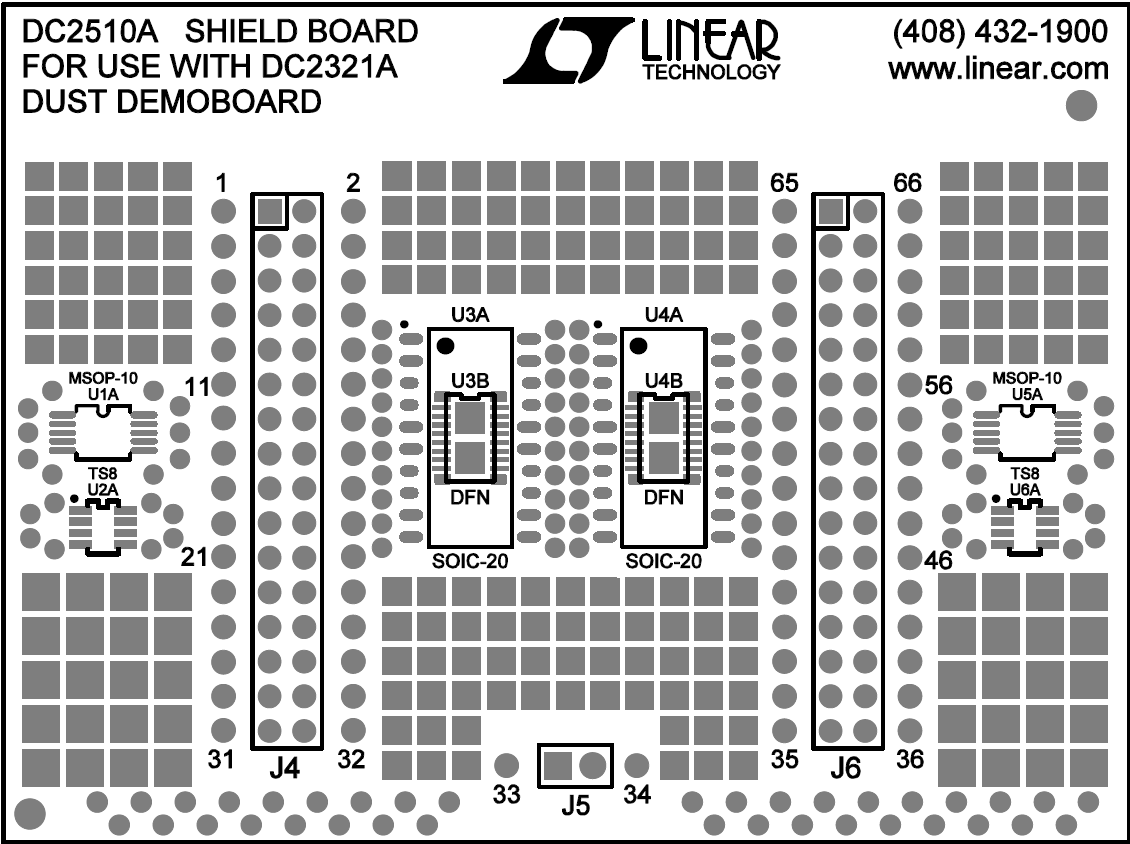


Figure 3. DC2510A Top Assembly Drawing

SPECIFICATIONS

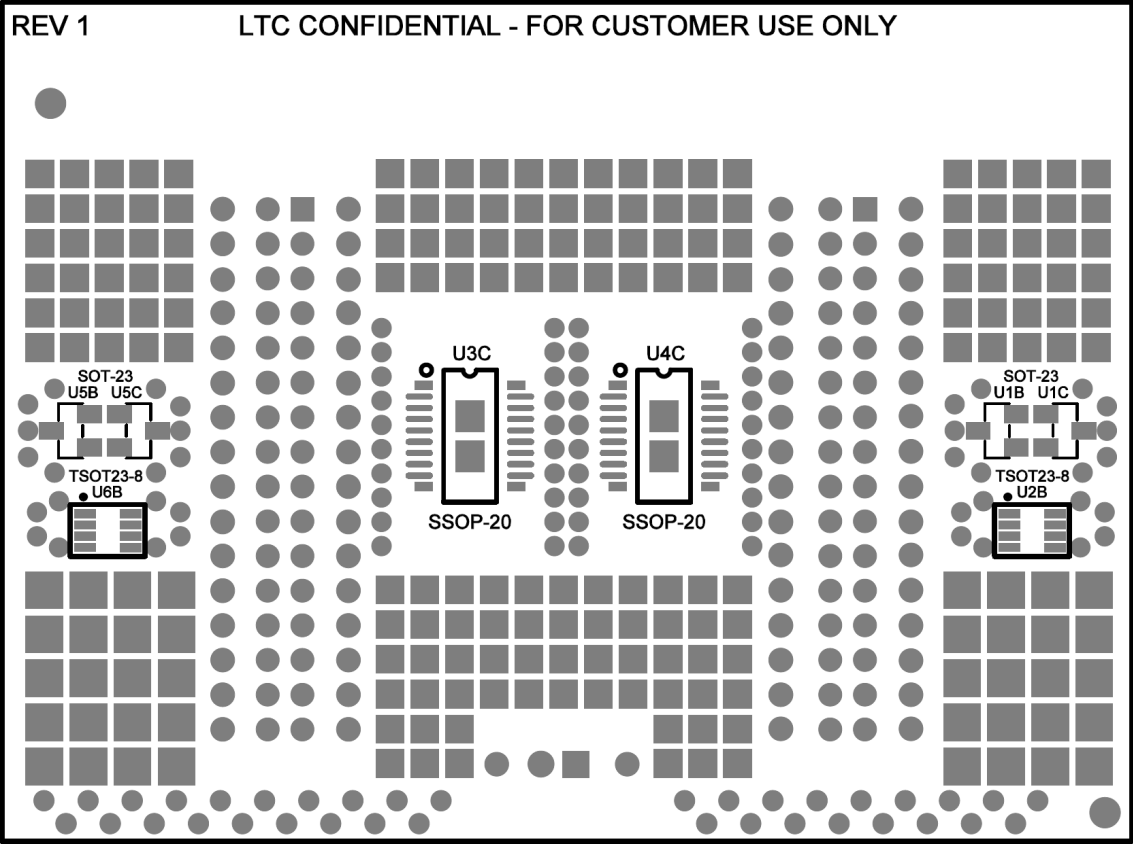


Figure 4. DC2510A Bottom Assembly Drawing

QUICK START PROCEDURE

Instructions

To use DC2510A, you will need to connect a sensor to the board. This device can be soldered onto the grid of copper pads, attached to one of the provided SMD footprints, or inserted into the headers directly (if it is a through-hole part such as a thermistor).

There are a few inputs and interfaces for receiving data:

1. UART
2. I²C
3. SPI
4. ADC (×4)
5. GPIO (×4 default, up to 18)

Table 1 shows which of these inputs can be read from the DC2321A GUI through the Mote Measurement Settings dialog. This allows users to start taking sensor measurements out-of-the-box without reprogramming the DC2321A. However, any of these inputs can be used if a custom program is written.

Some sensors can output a voltage that is suitable for ADC measurements (ADC abs max = 1.98V), or may have an integrated serial port. However, other sensors may require an additional IC to read the measurement and communicate with the mote.

General Notes

- The copper rails on DC2510A are not connected to anything by default, and must be wired by the user.
- SMD footprints on the top and bottom of the PCB share plated holes. Only one IC per each set of plated holes should be populated at any time.
- Do not connect USB power to any pin on the mote.
- Pull-up resistors should be pulled to VSUPPLY.
- Any input with a voltage applied when VSUPPLY is not powered can power the mote through a sneak path.

Combining Application Circuits

Because DC2510A is stackable, a user can make custom applications on several different boards and connect all of the boards together to combine the circuits. This can be useful if a user runs out of routing space on a board, or if an additional SMD footprint is needed.

Additionally, if a different GPIO pin is tied high on each of these boards, data from these circuits can be read from a single program which checks the state of a GPIO to determine if a particular sensor circuit is present.

SMD Soldering Instructions

The footprints for U3 and U4 allow ICs with GND paddles to be mounted using a soldering iron rather than a heat gun. The recommended procedure is as follows:

1. Place the IC onto the footprint as it will be soldered; solder the four corner pins into place on the copper pads.
2. Turn the board over and touch the soldering iron to both the paddle and the plated hole. Quickly apply solder to the junction.
3. Turn the board back to the original orientation and solder the rest of the pins.
4. Wire the paddle to its destination on the board.
5. Wire the pins to their destinations on the board.

QUICK START PROCEDURE

Table 1. Inputs and Interfaces Key

Pin Type	Pin Function	Readable Though GUI	Notes
Power	GND	–	–
	5VUSB	No	–
	3V3USB	No	–
	VSUPPLY	Yes	Abs Max is 4.20V
Serial Communication	UART	No	–
	I ² C	Yes	–
	SPI	No	Remove R1 on DC2321A to Free SS
Input/Output	ADC	Yes	Full-Scale Voltage is 1.8V, Abs Max is 1.98V
	GPIO	No	–


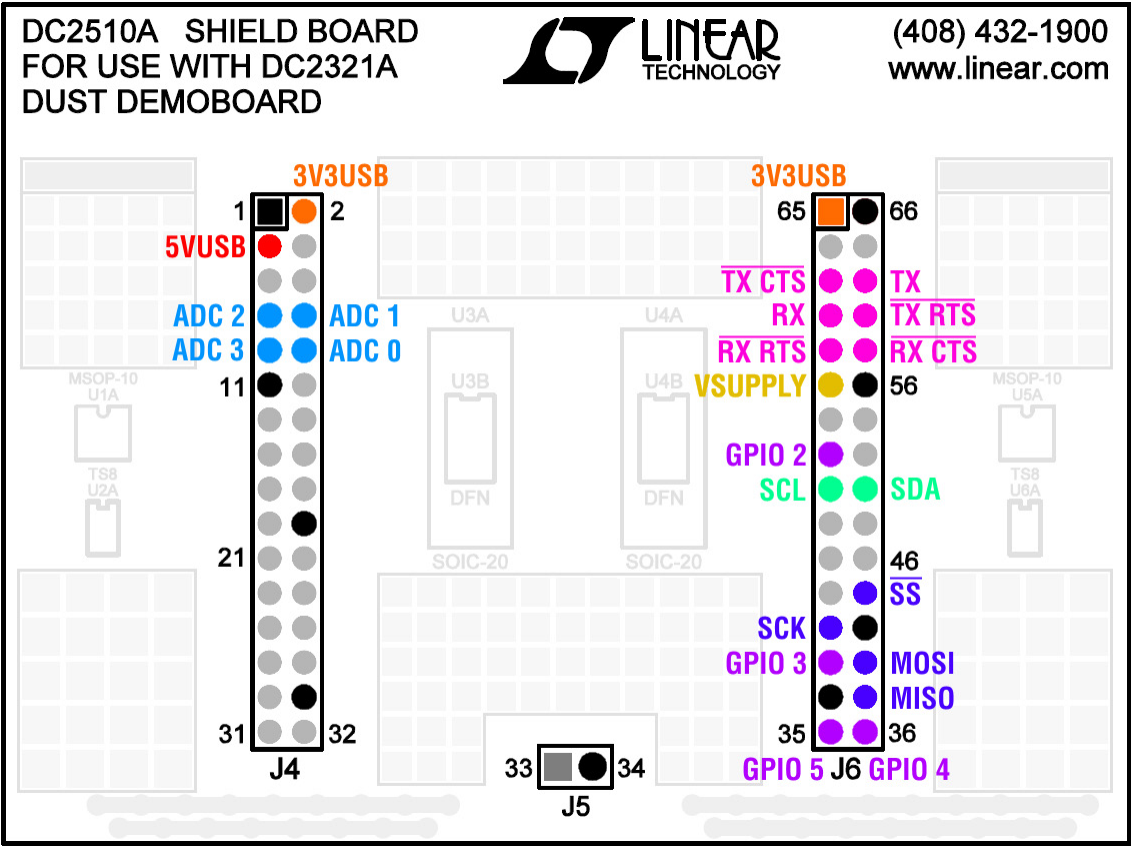


Figure 5. DC2321A Routing Guide


PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	2	J4, J6	2×16, 2mm PITCH, VERTICAL STACKABLE SOCKET	SAMTEC, ESQT-116-02-GF-D-310
2	1	J5	2 PIN, 2mm PITCH, VERTICAL STACKABLE SOCKET	SAMTEC, ESQT-102-02-GF-S-310
3	1	---	FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 2510A-1

SCHEMATIC DIAGRAM

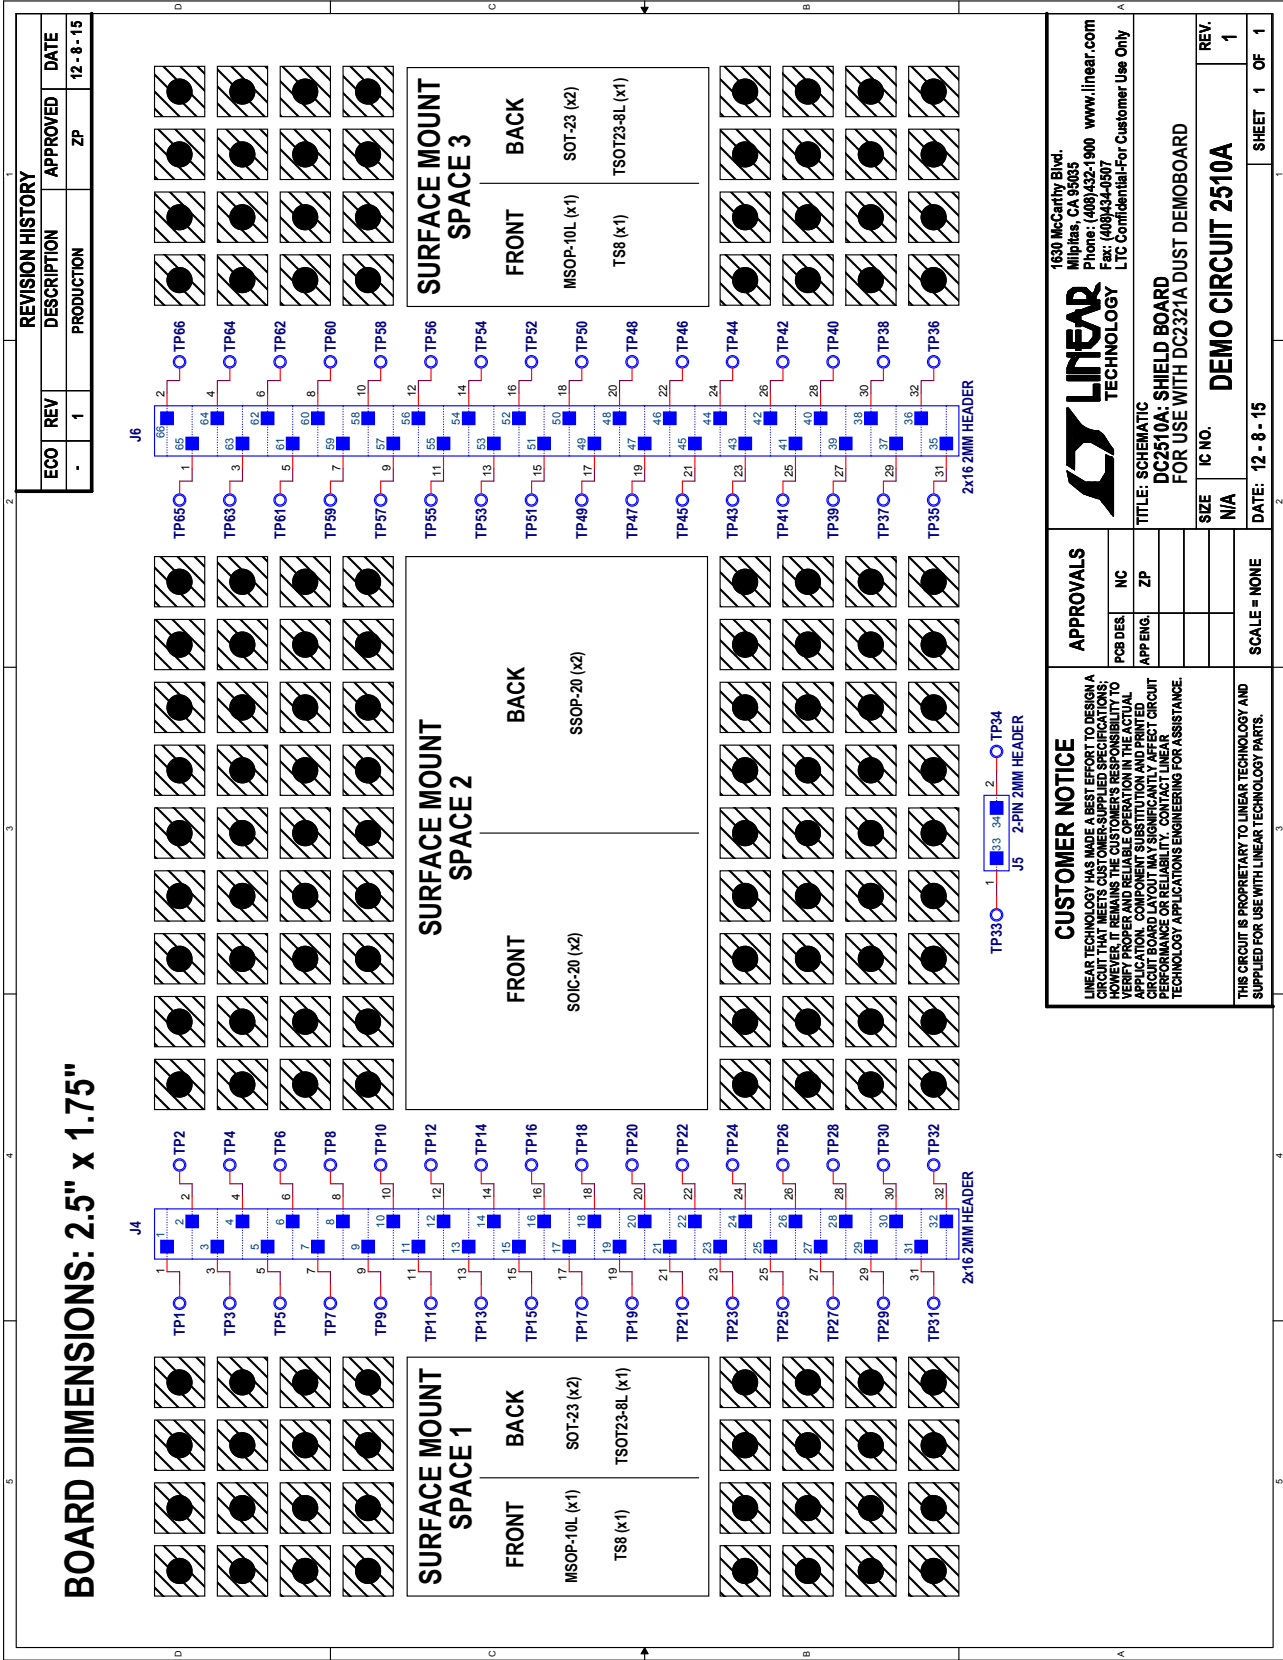

SCHEMATIC DIAGRAM

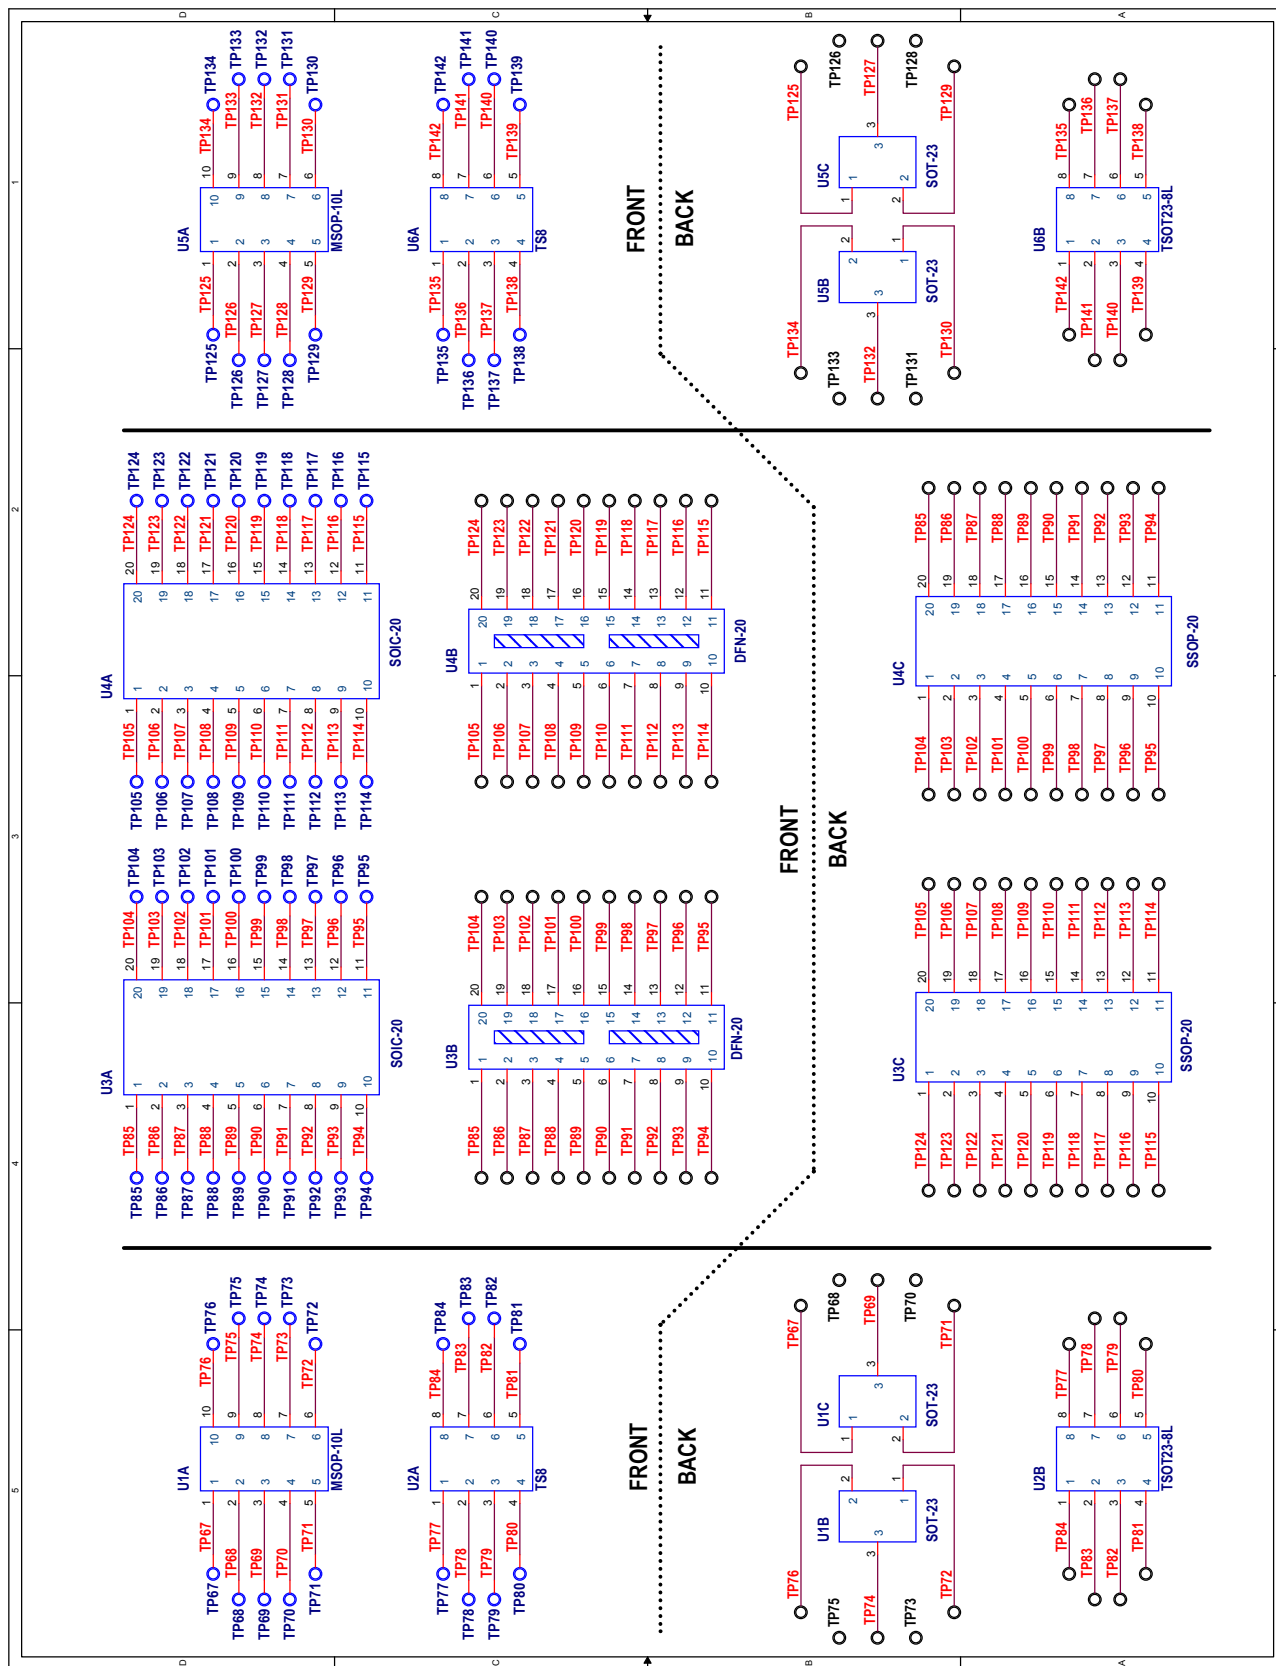

DEMO MANUAL DC2510A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation