

# Baumann™ 24003 3-Way Bronze or Stainless Steel Control Valve

The Baumann 24003 3-way control valve is ideally suited for control of flow and temperature where mixing or diverting service is required. This 3-way valve uses a rugged cast bronze or CF8M stainless steel body with S31600 austenitic stainless steel trim for extended service life.

## Features

- Compact and light weight design reduces installed piping costs.
- Optional ENVIRO-SEAL™ packing system to meet critical emission control requirements; suitable for use in light duty chemical service (not for use in corrosive service). This option is available in the stainless steel version only.
- High quality S31600 austenitic stainless steel trim materials.
- Dual plug and stem guiding provides increased stability during plug travel.
- Multiple trim capacity reductions available to meet changing process requirements.
- Epoxy powder-coated actuator with stainless steel fasteners for corrosion resistance.
- Multi-spring, field-reversible actuator with reduced deadband, permits direct operation from remote signal devices.
- Actuator and yoke can be removed from the valve assembly while maintaining packing integrity.
- Fisher® FIELDVUE™ digital valve controllers available for remote calibration and diagnostics in facilities utilizing the PlantWeb™ architecture.



W9764  
**Stainless Steel 3-Way Valve with Baumann 32 Actuator**



W9765  
**Bronze 3-Way Valve with Baumann 54 Actuator and  
FIELDVUE DVC2000 Digital Valve Controller**



## Product Bulletin

52.1:243WY  
November 2012


**24003 Valve**  
D103329X012

**Table 1. Flow Direction<sup>(1)</sup>**

Service	Inlet	Outlet
Diverting	C	U and L
Mixing	U and L	C

1. C = Common port, U = Upper port, L = Lower port

**Figure 1. Baumann 24000F Valve Body with Standard Bonnet and NPS 1 Integral Seat**

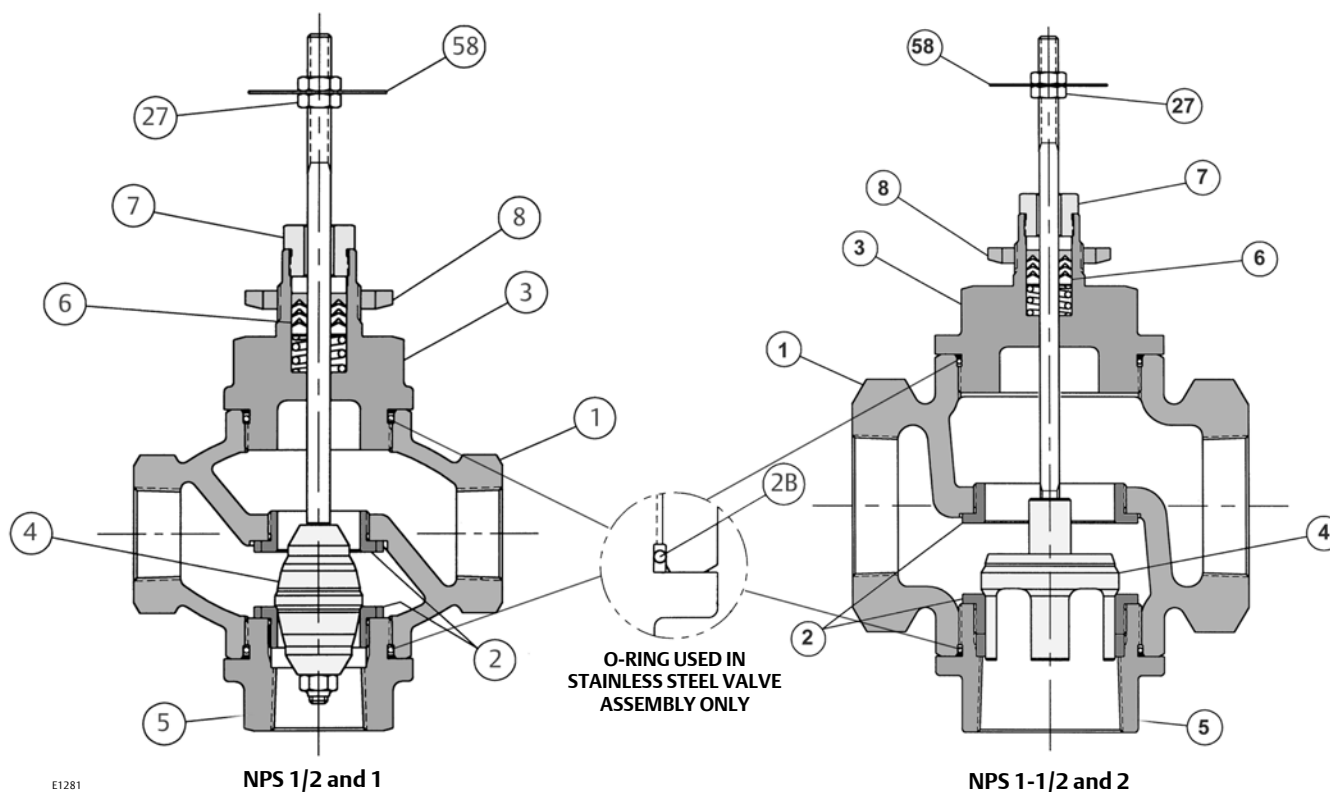


E1281

**Table 2. Materials of Construction**

KEY NO.	DESCRIPTION		MATERIAL	
			Bronze	Stainless Steel
1	Valve Body		Bronze ASTM B62	ASTM A351 CF8M
2	Seat Rings		ASTM A276 S31600 Condition A	ASTM A276 S31600 Condition A
2B	O-Ring		N/A	TFE/P (tetrafluoroethylene/propylene)
3	Bonnet		Bronze ASTM B62	ASTM A351 CF8M
4	Plug & Stem Assembly		ASTM A276 S31600 Condition A	ASTM A276 S31600 Condition A
5	Bottom Port		Bronze ASTM B62	ASTM A351 CF8M
6	Packing	Standard	PTFE (Polytetrafluoroethylene) / PTFE, 25% carbon filled	
		Optional	Molded Graphite Ribbon (Flexible Graphite)	
			ENVIRO-SEAL (Stainless Steel ONLY)	
7	Packing Follower		ASTM A276 S31600 Condition A Stainless Steel	
8	Drive Nut (Yoke)		ASTM A194 S30400 Gr. 8	
27	Locknuts		Stainless Steel (18-8 SST)	
58	Travel Indicator		ASTM A240 S30400	

**Figure 2. Standard Spring-Loaded PTFE V-Ring Packing Kit**

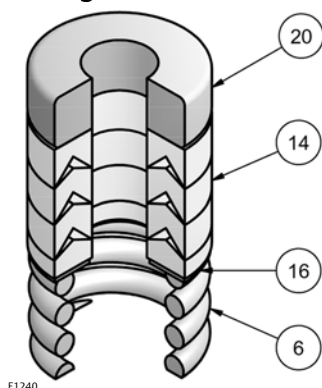


E1240

**Table 3. Standard Spring-Loaded PTFE V-Ring Packing Kit**

Key Number	Description	Material
6	Spring	ASTM A313 S30200
14	Packing Set	PTFE (Polytetrafluoroethylene) / PTFE, 25% carbon filled
16	Washer	ASTM A240 S31600
20	Spacer	J-2000 (filled-Polytetrafluoroethylene)

**Figure 4. ENVIRO-SEAL Packing Kit (Optional for Stainless Steel Only)**

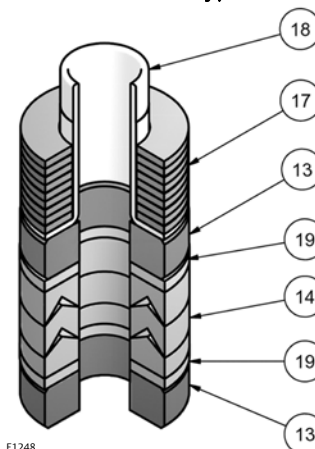


E1248

**Table 5. ENVIRO-SEAL Packing Kit (Optional for Stainless Steel Only)**

Key Number	Description	Material
13	Bushing	Carbon-Graphite
14	Packing Set	PTFE (Polytetrafluoroethylene) / PTFE, 25% carbon filled
17	Belleville Spring	N06600 Nickel Alloy (ASTM B637 N07718, 40 HRC max)
18	Bushing	PEEK (polyetheretherketone)
19	Washer	Modified PTFE

**Figure 3. Molded Graphite (Flexible Graphite) Packing Kit (Optional)**

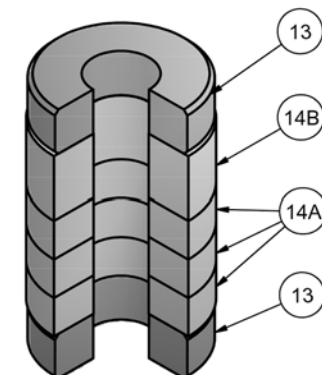

E1241

**Table 4. Molded Graphite (Flexible Graphite) Packing Kit (Optional)**

Key Number	Description	Material
13	Bushings	Carbon-Graphite
14A	Packing Rings	Graphite
14B	Packing Ring	Graphite

## Special ENVIRO-SEAL Packing Note

The ENVIRO-SEAL PTFE packing system is suitable for 100 ppm environmental applications on services up to 51.7 barg (750 psig) and process temperatures ranging from -46 to 232°C (-50 to 450°F).

For non-environmental applications, this packing system offers excellent performance at the same temperature range up to the maximum valve working pressure.

Temperature limits apply to packing arrangements only. Complete valve assembly temperature limits may differ, refer to appropriate pressure/temperature ratings.

(Reference Fisher Packing Selection Guidelines for Sliding-Stem Valves, Bulletin 59.1:062, D101986X012).

Table 6. Technical Specifications

NOMINAL PIPE SIZE	NPS 1/2, 1, 1-1/2, and 2	
END CONNECTIONS	Screwed NPT	
SEAT PLUG SEALING	Metal-to-Metal	
CHARACTERISTIC	Linear	
SEAT LEAKAGE	Class III	
VALVE BODY MATERIAL	Bronze	Stainless Steel
PRESSURE RATING	400 psi @ 150°F / 250 psi @ 400°F	720 psi @ 150°F / 515 psi @ 400°F
TEMPERATURE LIMITS	-20 to 400°F	-20 to 450°F

Figure 5. Valve Body and Temperature Limits

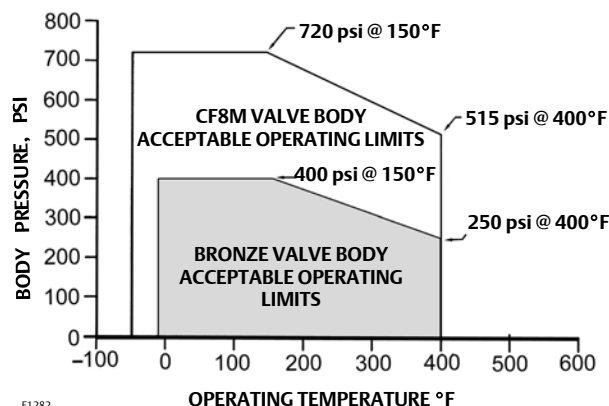


Table 7. Maximum Cv Values at 100% Plug Opening  
( $K_v = 0.86 \times C_v$ )

VALVE SIZE	ORIFICE DIAMETER	PLUG TRAVEL	RATED VALUES
NPS	inches	inches	$C_v$
1/2	0.626	0.56	1, 2
	0.876	0.56	4
1	0.876	0.56	4
	1.126	0.56	10
1-1/2	1.676	0.75	20
2	2.126	0.75	40

Table 8. Maximum Cv Values

Valve Series	C <sub>v</sub> Rating	F <sub>L</sub>	F <sub>d</sub>	X <sub>T</sub>	K <sub>C</sub>
688	1	0.9	0.46	0.68	0.73
	2				
	4				
	10				
	20				
	40				

Table 9. Actuator Specifications

TYPE <sup>(1)</sup>	32, 54, 70 Multi-Spring Diaphragm (Single Acting)
DIAPHRAGM AREA	210, 350, 450 cm <sup>2</sup> / 32, 54, 70 in <sup>2</sup>
AIR FAILURE	32 and 54 Fails Open or Closed (Field Reversible) / 70 Fails Closed ONLY
TRAVEL <sup>(2)</sup>	14.2 or 19.1 mm / 0.56 or 0.75 inches
AMBIENT TEMPERATURE RANGE	-29°C to 71°C / -20°F to 160°F
MAXIMUM AIR PRESSURE	2.41 barg / 35 psig
DIAPHRAGM MATERIAL <sup>(3)</sup>	NBR (Nitrile) / TPES (Polyester Thermoplastic)
SPRING CASES	Steel, Powder Epoxy-Coated with Stainless Steel Fasteners
YOKE	Ductile Iron, Powder Epoxy-Coated

1. Electric actuators available. Refer to bulletins 52.1:ECV (D103347X012) and 52.1:NVACTION (D103326X012).

2. Dual travel stops are available on Baumann 32 and 54 actuators. These are not field reversible.

3. Optional reinforced VMQ (Silicone) diaphragm with FKM (Fluorocarbon) O-ring actuator stem seal for high temperature conditions (-29°C to 121°C / -20°F to 250°F) is available with Baumann 32 and 54 actuators ONLY.

**Table 10. Allowable Pressure Drops (psi) - Mixing (Combining) Service**

ORIFIC DIAMETER (inch)	NOMINAL PLUG TRAVEL (inch) <sup>(1)</sup>	ACTUATOR TYPE	BENCH RANGE (psi)	ALLOWABLE PRESSURE DROP PORT L FAILS CLOSED (PSI)		BENCH RANGE (psi)	ALLOWABLE PRESSURE DROP PORT L FAILS OPEN (PSI)	
				3-15 psi Signal to Actuator	With Positioner 20 psig Air Supply		3-15 psi Signal to Actuator	With Positioner 20 psig Air Supply
0.626	0.56	32	5-13	112	225	3-11	281	563
			7-15	225	337	5-13	112	394
		54	7-14	375	563	3-10	469	720
			9-15	563	720	3-13	187	656
0.876	0.56	32	5-13	60	121	3-11	151	303
			7-15	121	259	5-13	60	212
		54	7-14	202	303	3-10	252	505
			9-16	303	404	3-13	101	353
1.126	0.56	32	5-13	37	75	3-11	94	189
			7-15	75	113	5-13	37	132
		54	7-14	126	189	3-10	157	315
			9-16	189	252	3-13	63	220
		70	8-15	220	309	---	---	---
1.676	0.75	54	5-15	29	58	3-10	73	147
			7-13	58	88	3-13	29	102
		70	7-15	82	123	---	---	---
2.126	0.75	54	3-10	---	---	3-10	46	93
			7-13	37	55	3-13	18	65
		70	7-15	52	78	---	---	---
			10-15	91	117	---	---	---

1. Use Baumann 54 or larger actuator with molded graphite ribbon or ENVIRO-SEAL packing systems.

**Table 11. Allowable Pressure Drops (psi) - Diverting (Diverging) Service**

ORIFIC DIAMETER (inch)	NOMINAL PLUG TRAVEL (inch) <sup>(1)</sup>	ACTUATOR TYPE	BENCH RANGE (psi)	ALLOWABLE PRESSURE DROP PORT L FAILS CLOSED (PSI)		BENCH RANGE (psi)	ALLOWABLE PRESSURE DROP PORT L FAILS OPEN (PSI)	
				3-15 psi Signal to Actuator	With Positioner 20 psig Air Supply		3-15 psi Signal to Actuator	With Positioner 20 psig Air Supply
0.626	0.56	32	5-13	80	160	3-11	201	402
			7-15	160	241	5-13	80	281
		54	7-14	268	402	3-10	335	670
			9-15	402	670	3-13	134	469
0.876	0.56	32	5-13	43	86	3-11	108	216
			7-15	86	185	5-13	43	151
		54	7-14	144	216	3-10	180	360
			9-16	216	288	3-13	72	252
1.126	0.56	32	5-13	27	54	3-11	67	135
			7-15	54	81	5-13	27	94
		54	7-14	90	135	3-10	112	225
			9-16	135	180	3-13	45	157
		70	8-15	157	220	---	---	---
1.676	0.75	54	5-15	21	42	3-10	52	105
			7-13	42	63	3-13	21	73
		70	7-15	59	88	---	---	---
2.126	0.75	54	3-10	---	---	3-10	33	66
			7-13	26	39	3-13	13	46
		70	7-15	37	55	---	---	---
			10-15	65	83	---	---	---

1. Use Baumann 54 or larger actuator with molded graphite ribbon or ENVIRO-SEAL packing systems.

Figure 6. Mixing Service Flow Characteristics

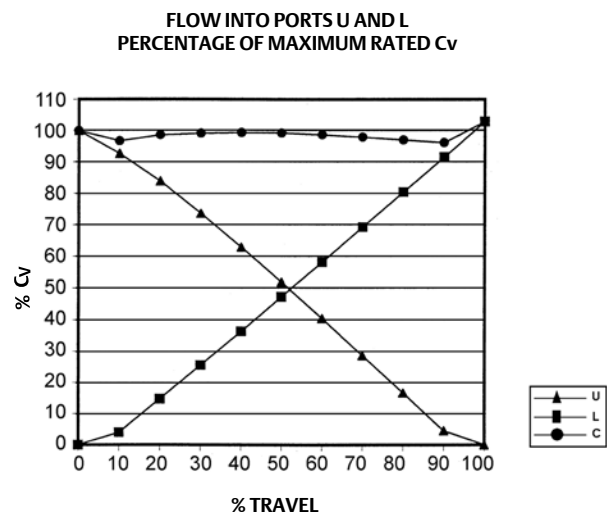


Figure 7. Diverting Service Flow Characteristics

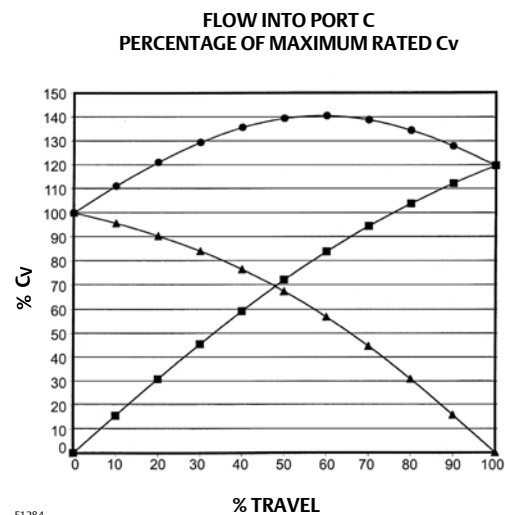



Table 12. Valve Body Dimensions and Weights: NPT Valve Bodies Only

VALVE SIZE	VALVE BODY MATERIAL						TRAVEL	WEIGHT
	BRONZE, NPT			STAINLESS STEEL, NPT (A)				
NPS	A	B	C1	A	B	C1	Inches	lbs
1/2	4.88	2.75	2.75	5.0	2.75	2.75	0.56	8
1	4.88	2.75	2.75	5.0	2.75	2.75	0.56	8
1-1/2	5.75	3.81	3.31	6.1	3.38	3.31	0.75	15
2	6.50	4.0	3.6	6.50	3.75	3.6	0.75	20

Table 13. Actuator Weights

BAUMANN 32 ACTUATOR		BAUMANN 54 ACTUATOR		BAUMANN 70 ACTUATOR	
kg	lbs	kg	lbs	kg	lbs
4.5	10	11.3	25	15.4	34

**Figure 8. Dimensional Drawings**

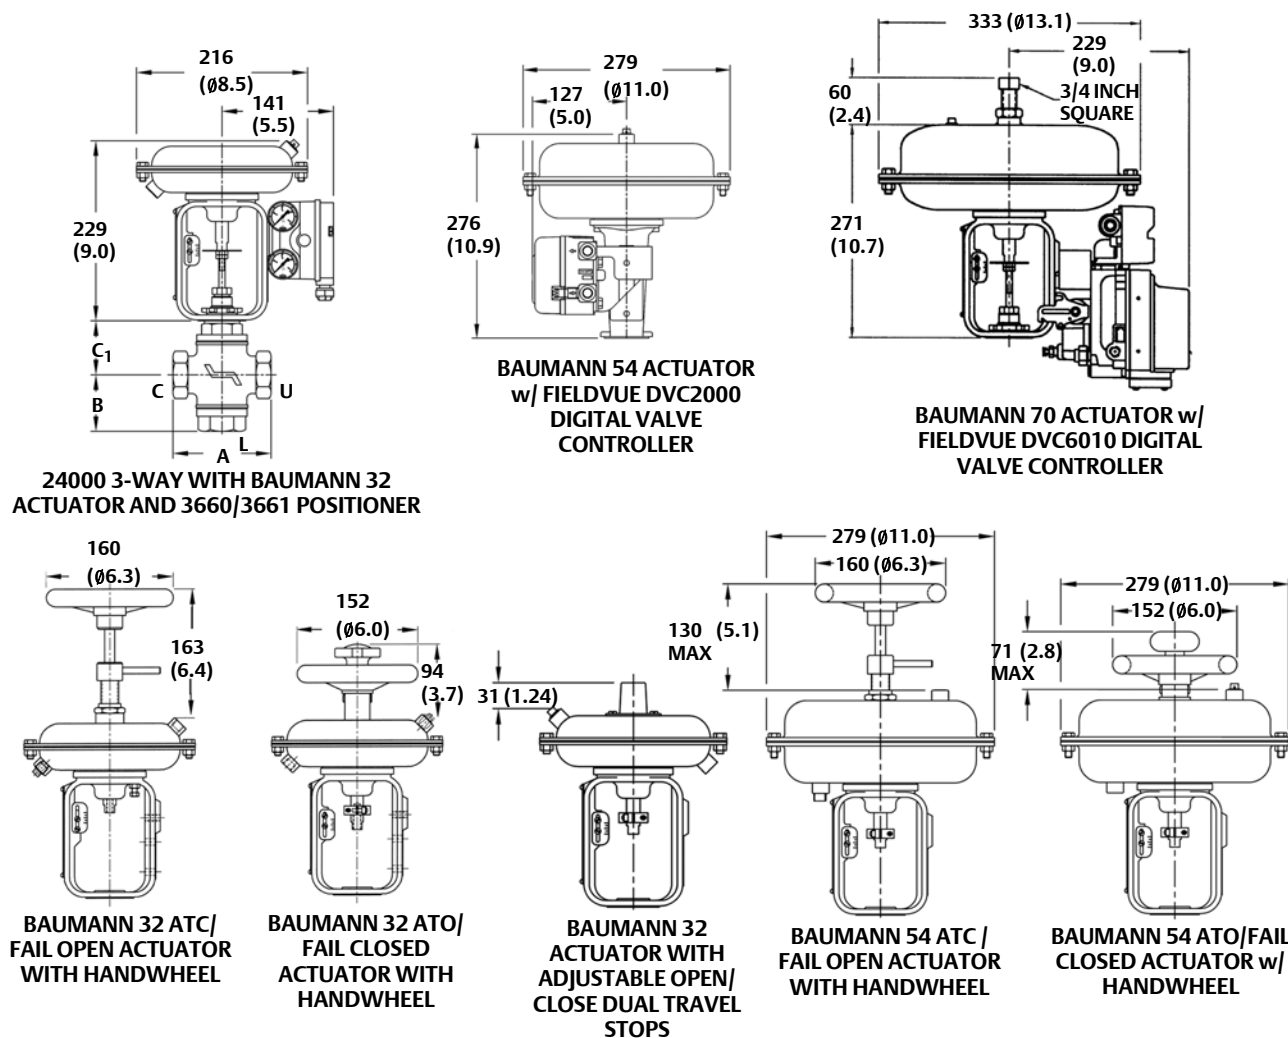

E1285


mm  
(inch)

Note: Actuator removal requires 115 mm (4.5 inches) vertical clearance.

**Table 14. Application Port<sup>(1)</sup>**

Service	Inlet	Outlet
Diverting	C	U and L
Mixing	U and L	C
1. C = Common port, U = Upper port, L = Lower port		

Figure 9. Mixing and Diverting Applications

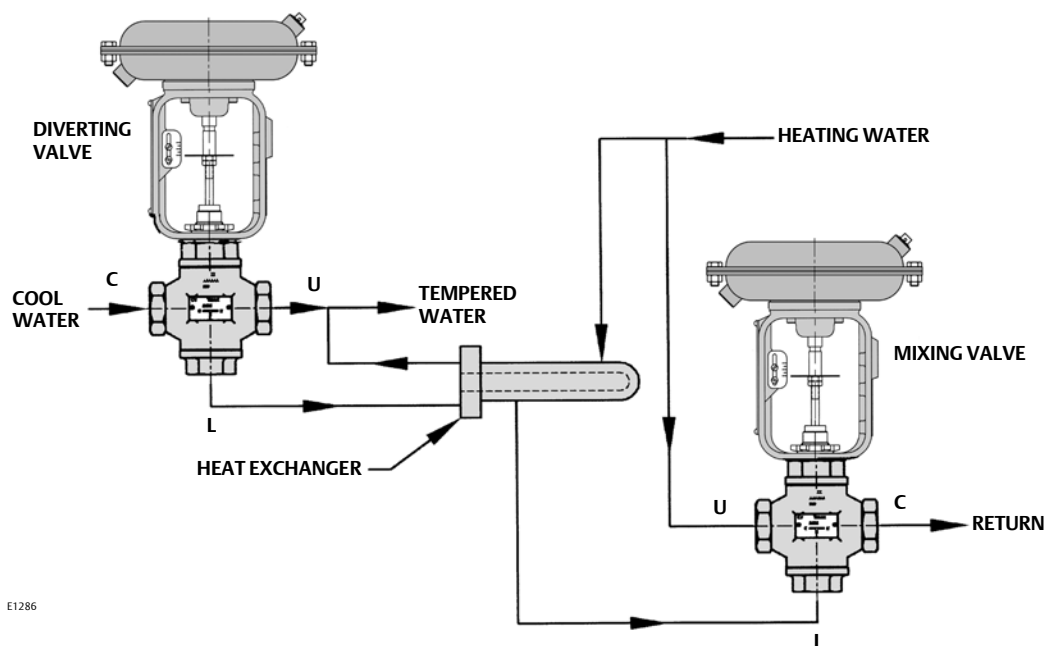

E1286

Table 15. Model Numbering System

Actuator Type	24	Service		Port "L" Fails		3	Material	
Valve Body Series						3-Way Valve Body		
32	24	D	Diverting	1	Closed	3	---	Bronze
54		M	Mixing	2	Open		S	Stainless Steel
70								

Neither Emerson, Emerson Process Management, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

Baumann, ENVIRO-SEAL, Fisher, FIELDVUE, and PlantWeb are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

#### Emerson Process Management

Marshalltown, Iowa 50158 USA  
Sorocaba, 18087 Brazil  
Chatham, Kent ME4 4QZ UK  
Dubai, United Arab Emirates  
Singapore 128461 Singapore

www.Fisher.com