


Liebert® Custom Air Handling Units

Thermal Management Solutions for Large Data Centers



Liebert Custom Air Handling Solutions

- Advanced data center control and optimization
- Next generation components and equipment
- Industry best service offerings


Delivers

- Industry best delivered efficiency – annual PUE < 1.2
- Industry’s most advanced Control and Performance Optimization
- Availability approaching 100%
- Maximum customer design and control flexibility

Advanced Data Center Control and Optimization

- Choice of control strategies including Optimized Aisle™
- Multi-Unit teamwork with fan speed coordination and predetermined sequence of operation
- Global platform with proven operational routines
- Simple BMS integration
- *Trellis™* Installed advanced applications


Optimized Data Center Control with Multi-Unit Teamwork

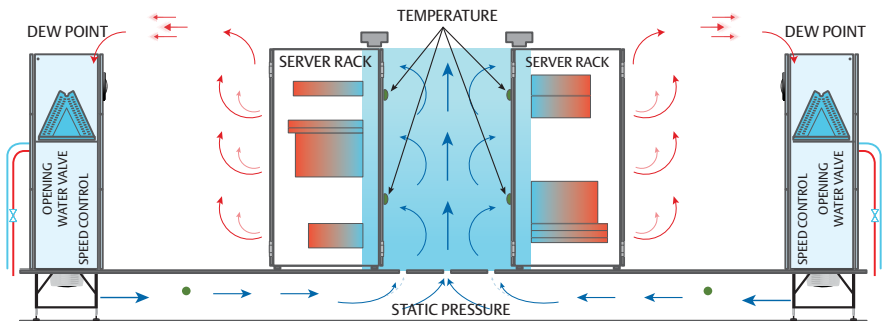

Next Generation Components and Equipment

- Highest quality design, material and construction
- State of the art, high efficiency components and systems
- *Trellis* Installed intelligent sensors

Trellis Installed Intelligent Sensors

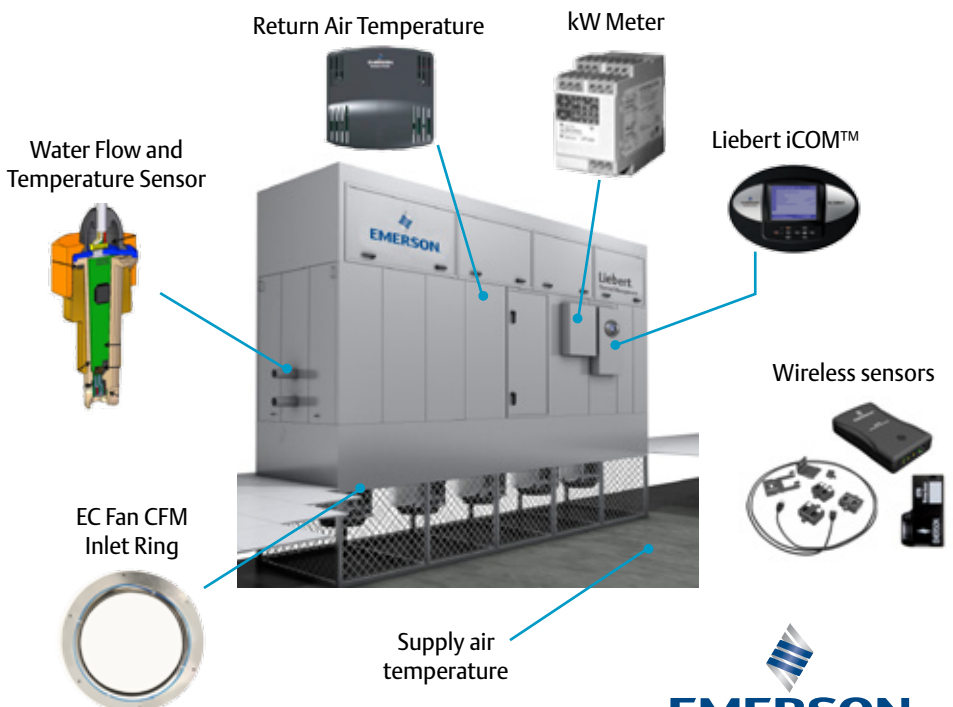


Industry Best Service Offerings

- Nationwide service through local factory trained technicians
- 24-hour customer and tech support
- Guaranteed 4 hour response time for contract customers
- Remote Monitoring delivered by data center experts
- Energy optimization services


Maximum Customer Design and Control Flexibility

Chilled Water

- EC or direct drive fans with VFD options arranged in single or fan array configurations
- Optional air economization for optimum efficiency



Liebert Chilled Water Air Handler

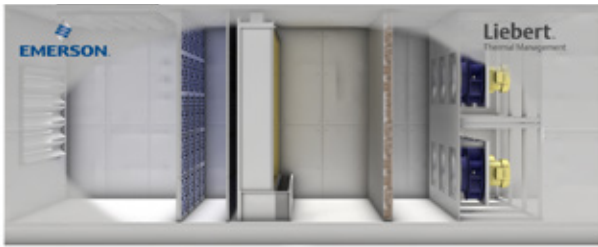

Liebert Direct Evaporative Freecooling Unit

Direct Evaporative


- PUE < 1.1 with minimal water usage
- DX or chilled water secondary cooling options sized for full or trim cooling
- EC or direct drive fans with VFD options arranged in single or fan array configurations

Indirect Evaporative

- PUE < 1.2 with minimal water usage
- Highly efficient aluminum air-to-air heat exchanger offers up to 66% efficiency dry and 78% efficiency wet
- Supplemental DX or chilled water options available for trim cooling requirements



Liebert Indirect Evaporative Freecooling Unit

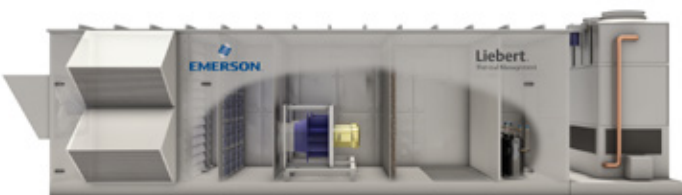

Liebert DX Air Handler

Direct Expansion

- High quality, highly efficient rooftop DX solutions specifically designed for data centers
- Configurations incorporate outside air economization, variable capacity compressors, bypass dampers, and evaporative condensers

	Capacity	Air Flow	Configurations
Liebert Chilled Water Air Handler	200 – 600+ kW	25,000 – 80,000+ CFM	Indoor Unit – Downflow, Upflow, or Horizontal Airflow
Liebert Direct Evaporative Freecooling Unit	150 – 600+ kW	20,000 – 80,000+ CFM	Data center, gallery, rooftop or external building perimeter
Liebert Indirect Evaporative Freecooling Unit	150 – 400+ kW	20,000 – 60,000+ CFM	Rooftop or external building perimeter
Liebert DX Air Handler	150 – 600+ kW	20,000 – 80,000+ CFM	Rooftop or building perimeter

Contact your local representative to learn more about air handler unit customization options. EmersonNetworkPower.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2015 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice. All names and logos referred to herein are trade names, trademarks or registered trademarks of their respective owners. © Liebert is a registered trademark of the Liebert Corporation. Emerson, Emerson Network Power and the Emerson Network Power Logo are trademarks and service marks of Emerson Electric Co. ©2015 Emerson Electric Co.

SL-19700 (R03/15) Printed in USA