

Operating Instructions

Digital Video Recorder

Models: DTR-6008/250CD, DTR-6016/250CD,
DTR-6008/500CD, DTR-6016/500CD,
DTR-6008/750CD DTR-6016/750CD



Safety instructions

EMC class

- ▶ This video recorder (DVR) is a class A device in accordance with EN 55022.
- ▶ This device may cause interference to other equipment in domestic use. In such cases the persons operating the DVR are required to provide appropriate countermeasures, for which they themselves bear the cost.

Importance of these Operating Instructions

- ▶ Please read the safety instructions and the other information contained in the Operating Instructions before connecting up and operating the DVR.
- ▶ The Operating Instructions should be kept in a safe place for later reference.

Ambient conditions for the DVR

- ▶ The DVR should be protected against excessive heat, dust, damp and vibration.
- ▶ The DVR may only be operated at temperatures between +5°C and +40°C, and up to a maximum air humidity of 90%.
- ▶ The DVR may only be operated indoors, and must be protected against incursion of water and damp.

Care of the DVR

- ▶ Never switch on the DVR when damp has penetrated it. In such cases, have the DVR checked by a qualified service engineer.
- ▶ Do not place any heavy objects on the DVR.
- ▶ Never cover over the DVR's vents.
- ▶ Never insert metal objects or any other items into the vents. This may permanently damage the DVR.
- ▶ The housing may only be opened by authorised persons. Repairs may only be carried out by qualified service personnel.
- ▶ The DVR must be disconnected from the power supply before its housing is opened.

Getting started with the DVR

- ▶ When laying the connecting cables, make sure no weight is placed on them, that they are not kinked or damaged, and that no damp can penetrate them.

Cleaning the DVR

- ▶ The housing of the DVR may only be cleaned with a damp (not wet) cloth,
- ▶ Use only a mild detergent. Do not use solvent-containing detergents or petrol. This could permanently damage the surface finish.

Spare parts

- ▶ Use only original spare parts from Videor Technical E. Hartig GmbH.

Table of contents

Overview	7
Package contents	7
Basic functions	7
Features	7
Requirements for operation	7
Control options	7
Connections on the rear	8
Front panel controls	9
Key to controls	10
Function buttons	10
PTZ camera functions	10
Playback functions	10
Remote control functions	11
Playback functions	11
Menu overview	12
Accessing the menus	14
Accessing the Display menu	14
Accessing the PTZ menu	14
Accessing the Setup menu	15
Accessing the Search menu	15
Getting started	16
Checklist for DVR operation	16
Connecting the remote control and DVR	16
Switching on the DVR	17
Switching off the DVR	17
Administration	18
Saving your system setup	18
Loading your system setup	18
Deleting recordings	18
Downloading software updates	19
Hiding from specific users	19
Restoring factory defaults	19
Mirroring of hard disks	20
Determining the memory requirement of a recording	21
Searching for recordings	22
Using calendar search	23
Using event log search	24
Using text-in search	25
Using motion search	26
Copying recordings	27

Table of contents

Menu descriptions – Setup menu	28
System – Information	29
System – Date/Time	30
System – Storage	31
System – User	33
System – Shutdown	34
System – Log out user1...	34
Network – Network	34
Network – Notification	37
Devices – Camera	38
Devices – Audio	39
Devices – Alarm-Out	40
Devices – Display	41
Devices – Remote Control	42
Record – Record	43
Record – Schedule	44
Record – Pre-Event	45
Record – Archive	46
Event – Alarm-In	47
Event – Motion Detection	49
Event – Video Loss	51
Event – Text-In	53
Event – System Event	55
Event – Event Status	57
WebGuard – WebWatch controls	58
WebGuard – WebSearch controls	59
Using WebGuard	60
Specifications DTR-6008	61
Specifications DTR-6016	63
Accessories	65
Supported PTZ cameras	66
Index	67
Notes on disposal	70

Overview

Package contents

- Digital video recorder (DVR)
- Mains power cord
- Operating instructions
- RAS (Remote Administration System) software on CD
- Operating instructions for RAS software on paper and CD
- Mounting kit for cabinet installation
- Screws for attaching SCSI Connector
- Mounting screws and guides for installation of hard disk drives
- Infrared remote control

Basic functions

- Record video images using multiple cameras
- Even-based recording start
- Video playback
- Search for specific video sequences

Features

- MPEG-4 compression / triplex mode
- 8 or 16 loop-through inputs / VGA, S-VHS/FBAS outputs
- Audio and alarm inputs / outputs
- Max. recording speed DTR-6008/xxxCD: 200 field images per sec (PAL) / D1: 50 field images per sec (PAL)
- Max. recording speed DTR-6016/xxxCD: 400 field images per sec (PAL) / D1: 100 field images per sec (PAL)
- Memory capacity 250 GB / 500 GB / 750 GB
- Maximum video resolution 720 x 576 pixels
- SCSI port for archiving / memory expansion
- Various recording criteria possible
- Archiving/image transfer via USB and CD-RW
- ATM/POS text display / 2x to 4x digital zoom
- Telemetry control functions via RS-485 port
- Network port (Ethernet) / IR remote control

Requirements for operation


- Digital video recorder DTR connected
- At least 1 camera connected
- At least 1 monitor connected
- Mouse connected, if DVR is to be controlled by mouse

Control options

- Front panel
- Remote Control
- Mouse
- WebGuard
- RAS program

Connections on the rear


Note: Connections optionally for NTSC or PAL operation.

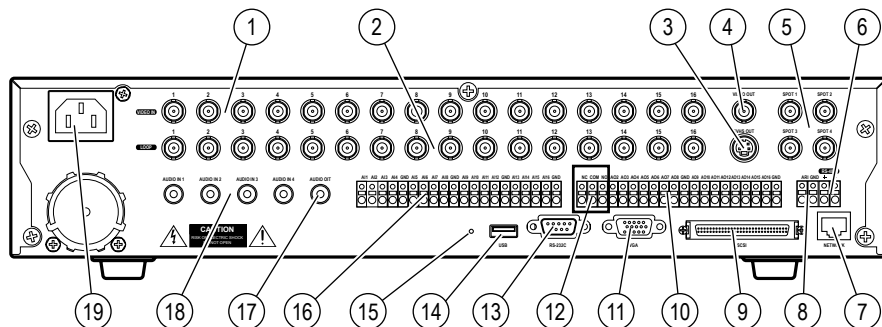

No.	Designation	Functions/connections	Example devices
1	VIDEO IN 1-16	Max. 16 video channels	Cameras
2	LOOP 1-16	Max. 16 loop-through video channels	Cameras
3	SVHS OUT	S-VHS output	Monitors
4	VIDEO OUT	Video output	Monitors
5	SPOT1 - SPOT4	Max. 4 video outputs	Spot monitors
6	RS-485	External interface	Keyboard, PTZ camera
7	NETWORK	Network	Network cable
8	ARI/GND	Reset alarm with external signal	Switch
9	SCSI	External storage media	Hard disk
10	AO2 - AO16	Alarm outputs for external devices	Siren, flashing light
11	VGA	PC monitor	PC monitor
12	NC, COM, NO	Relay alarm output for external device	Siren, flashing light
13	RS-232C	External interface	Modem
14	USB	External interface	Drive, mouse
15	Reset switch	Reset to factory defaults	-
16	AI1 - AI16	Alarm inputs for external devices	Sensors
17	AUDIO OUT	Audio output	Amplifier, speakers
18	AUDIO IN 1 - AUDIO IN 4	Max. 4 Audio inputs	Microphone
19	Power supply	Mains power connection	-

Front panel controls



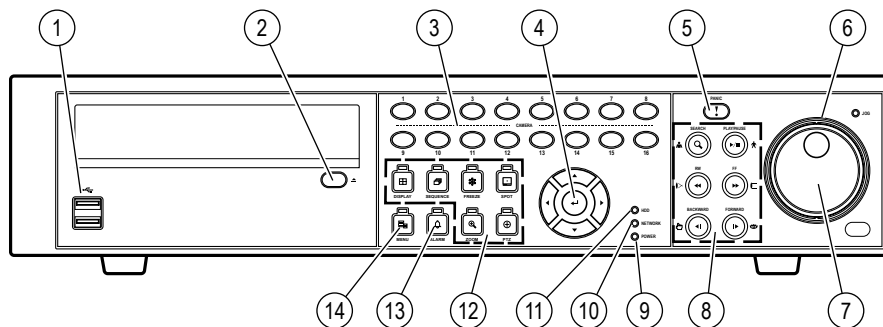



The following diagram and table set out the controls on the front panel of the DVR:









No.	Designation	Function
1		USB ports
2		Open built-in CD-RW writer
3	1 to 16	<ul style="list-style-type: none"> Select cameras Enter passwords
4	Menu navigation	Navigation and selection within the menu
5	PANIC	Start/end panic recording
6	Shuttle ring	Infinitely adjust playback speed
7	Jog dial	<ul style="list-style-type: none"> Change size of frame in picture-in-picture mode Change numerical values in Setup menu Frame-by-frame playback in Play mode
8		<p>Playback functions (primary assignment)</p> <p>PTZ camera functions (secondary assignment)</p>
9	POWER	Power-on indicator when DVR is in operation
10	NETWORK	Indicates Ethernet or modem connection
11	HDD	Indicates hard disk operation
12	DISPLAY, SEQUENCE, FREEZE, SPOT, ZOOM, PTZ	Function buttons
13	ALARM	<ul style="list-style-type: none"> Reset alarm View event list
14	MENU	Open/quit menu structure

Key to controls







Function buttons

Element	Function
	Change display mode
	Sequence On/Off
	<ul style="list-style-type: none">• Freeze On/Off• Copying recordings in Search menu by pressing and holding down button
	Spot monitor assignments
	PTZ camera functions On/Off
	Zoom On/Off

PTZ camera functions


Element	Function
	Zoom in
	Zoom in
	Close-up
	Wide-angle
	Save preset
	Load preset

Playback functions

Element	Function
	<ul style="list-style-type: none">• Select Search/Play function• Stop playback
	Start/pause playback
	Fast rewind
	Fast forward
	Frame-by-frame rewind
	Frame-by-frame forward

Remote control functions

The following diagram and table set out the functions on the remote control:

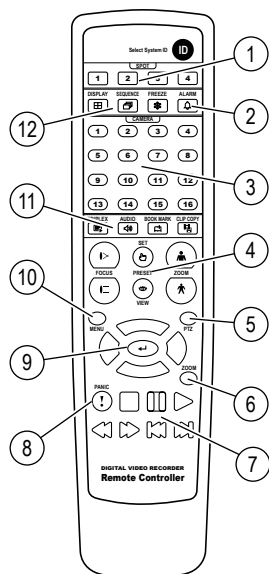


No.	Designation	Function
1	SPOT 1 - 4	Spot monitor assignments
2	ALARM	<ul style="list-style-type: none"> Reset alarm View event list
3	1 to 16	<ul style="list-style-type: none"> Select cameras Enter passwords
4		PTZ camera functions
5	PTZ	PTZ camera functions On/Off
6	ZOOM	Zoom On/Off
7		Playback functions
8	PANIC	Start/end panic recording
9	Menu navigation	Navigation and selection within the menu
10	MENU	Open/quit menu structure
11		No function
12	DISPLAY, SEQUENCE, FREEZE	Function buttons

Playback functions

Element	Function
	<ul style="list-style-type: none"> Select Search/Play function Stop playback
	Pause playback
	Start playback
	Fast rewind
	Fast forward
	Frame-by-frame rewind
	Frame-by-frame forward


Menu overview

The following illustration shows the structure of the complete menu tree that is accessible using the mouse control:

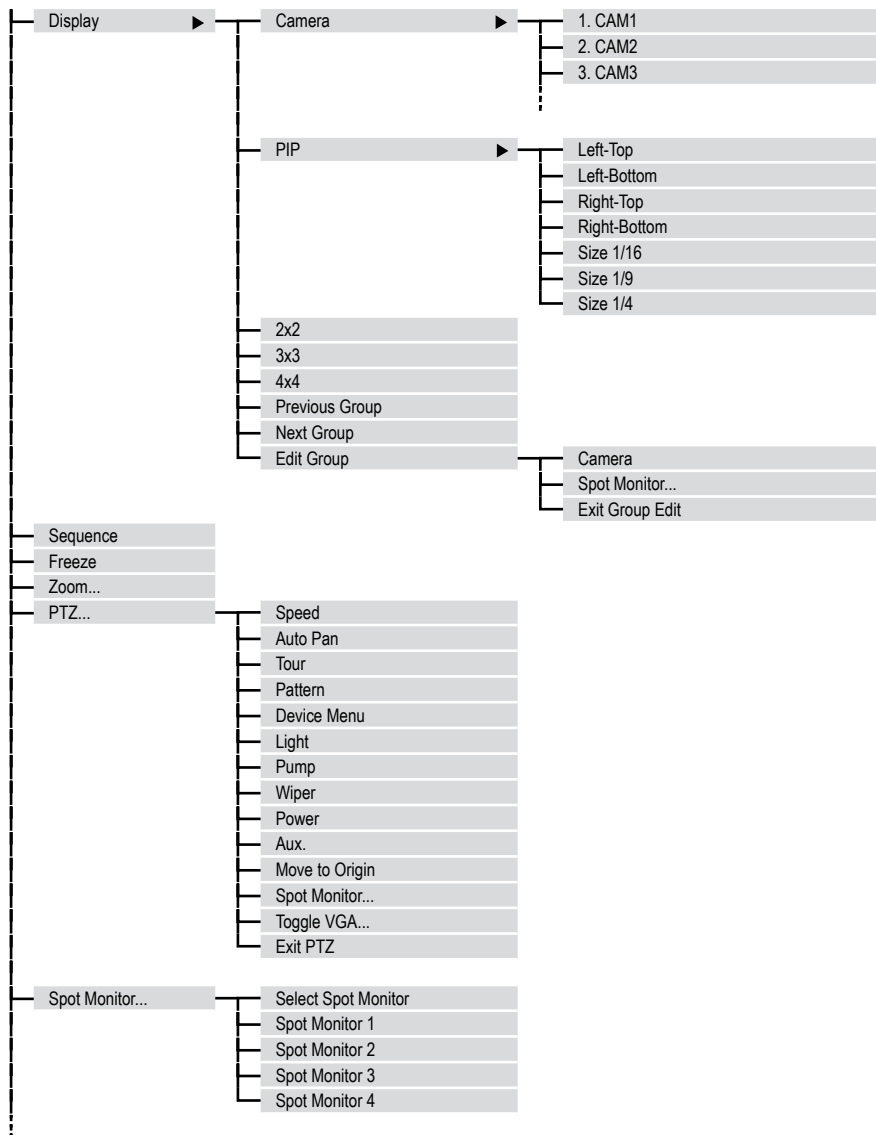

Menu overview (continued)

The following illustration shows the structure of the complete menu tree that is accessible using the mouse control:

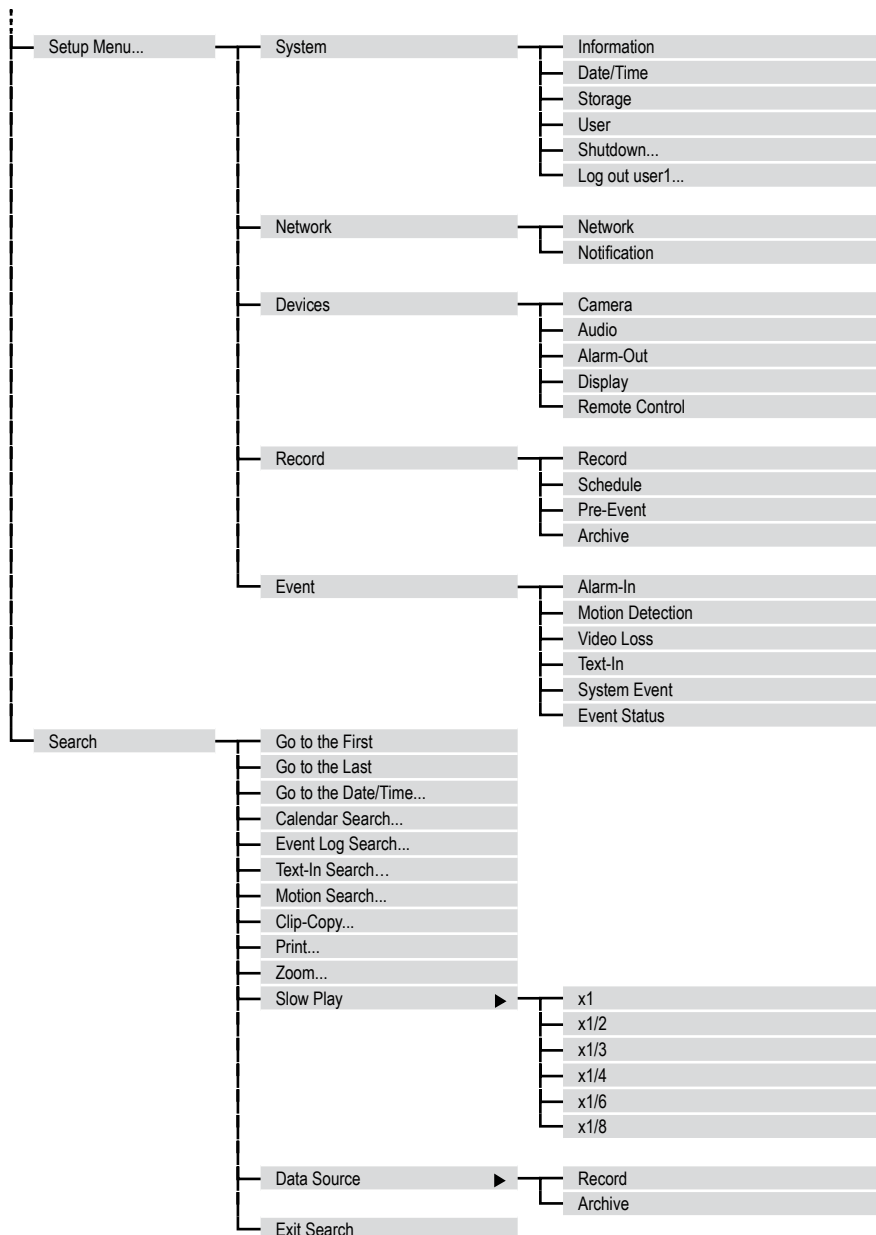



Accessing the menus












Accessing the Display menu

Requirement:

- The current camera image is shown in full image or quad image.

Step	Action	Access using	Key sequence/menu path
1	Open Display menu...	Device	
		Remote Control	
		Mouse	Display



Access to submenu via Device/Remote Control

Submenu	Camera image	Key sequence
Change Display modes (PIP, 2x2, 3x3, 4x4)	Without frame	    ...
Previous/Next Group	Without frame	 
Edit Group	With frames	  
Change position of image-in-image	Without frame	 
Change size of image-in-image	Without frame	Jog dial

Accessing the PTZ menu

Requirement:

- A PTZ camera is connected and configured.
- Current camera image is shown as a full image.


Step	Action	Access using	Key sequence/menu path
1	Open PTZ menu... Result: Menu of the configured PTZ camera is shown.	Device	 > 
		Remote Control	PTZ > MENU
		Mouse	PTZ...

Accessing the menus, continued

Accessing the Setup menu

Requirement:




- The current camera image is shown in full image or quad image.

Step	Action	Access using	Key sequence/menu path
1	Open Setup Menu...	Device	
	Result: Prompt for user name and password.	Remote Control	MENU
		Mouse	Setup Menu...
2	Log in as user. User name: admin Password: (blank) Note: Use default access data only for first-time access.		

Accessing the Search menu

Requirement:

- The current camera image is shown in full image or quad image.

Step	Action	Access using	Key sequence/menu path
1	Open Search menu...	Device	 > 
	Result: Search for recorded images is activated.	Remote Control	 > MENU
		Mouse	Search

Getting started

Checklist for DVR operation

Step	Action	Menu path
1	Connect peripheral devices as per planned setup.	
2	Specify menu language.	Setup Menu... > System > Information
3	Adjust date and time.	Setup Menu... > System > Date/Time
4	Set up user.	Setup Menu... > System > User
5	Set up network and desired notification channels (optional).	Setup Menu... > Network > ...
6	Register peripherals with DVR.	Setup Menu... > Devices > ...
7	Set up event types and associated responses.	Setup Menu... > Event > ...
8	Set up recording parameters and schedule.	Setup Menu... > Record > ...

Connecting the remote control and DVR

The remote control and DVR can be assigned an ID, because the ID of each DVR in the network must be unique. The DVR will then only respond to the remote control with the matching ID.

- If the system ID in the DVR is 0, it will respond to the remote control regardless of the remote's ID.
- If the system ID in the DVR is not 0, you must set the ID of the remote control identically.

Step	Action	Menu path
1	Set DVR system ID.	Setup Menu... > System > Information
2	Match remote control to system ID by pressing ID button on remote control.	
3	Select relevant number on remote control.	

Getting started (continued)

Switching on the DVR

Requirement:

- The start-up preparations are complete.

Step	Action
1	Plug in DVR mains plug.
2	Switch on monitor. Result: System starts up automatically and is ready to use.

Switching off the DVR

Requirement:

- You have accessed the Setup menu.

Step	Action	Menu path
1	Shut down the system. Result: System shuts down automatically.	Setup Menu... > System > Shutdown...
2	After shutdown, disconnect the mains plug.	

Administration

Saving your system setup

You can save your DVR's setup data, including its network configuration.

Requirement:

- USB memory stick

Step	Action	Menu path
1	Insert a USB memory stick into one of the USB ports.	
2	Export your setup.	Setup Menu... > System > Information > Setup > Export...
3	Specify a file name.	
4	Export your setup.	Export

Loading your system setup

You can load your stored DVR system setup with or without its network configuration.

Requirement:

- USB memory stick with stored setup

Step	Action	Menu path
1	Insert a USB memory stick into one of the USB ports.	
2	Import your setup.	Setup Menu... > System > Information > Setup > Import...
3	Select the file name and, where appropriate, the network configuration.	
4	Import your setup.	Import

Deleting recordings

You can only delete all your recordings together. It is not possible to delete recordings from a specific time period.

Step	Action	Menu path
1	Delete all recordings.	Setup Menu... > System > Information > Clear All Data... or Setup Menu... > System > Storage > Information > Information > In Use > Clear

Administration (continued)

Downloading software updates

You can download software updates for your DVR from a USB memory stick.

Requirement:

- USB memory stick with latest software release

Step	Action	Menu path
1	Insert a USB memory stick into one of the USB ports.	
2	Start update.	Setup Menu... > System > Information > Upgrade...
3	Install new release.	

Hiding from specific users

You can hide video images and camera data according to the preset user rights.

Step	Action	Menu path
1	Set camera Covert mode.	Setup Menu... > Devices > Camera > Settings
2	Cancel 'Covert Camera View' access for specific users (groups).	Setup Menu... > System > User

Restoring factory defaults

Before restoring the factory defaults, you should export your current system settings in case you need to re-import them later. (see *Saving your system setup and Loading your system setup*)

Step	Action
1	Shut down the system.
2	Disconnect the mains plug.
3	Push a paper clip into the Reset button (on the rear of the DVR) and hold it there.
4	Plug in the mains plug.
5	Wait for all the LEDs to flash 5 times (about 30 seconds).
6	Withdraw the paper clip.

Administration (continued)

Mirroring of hard disks

Mirroring of hard disks prevents the loss of records in the event of a hard disk defect.

Requirements:

- The Digital Video Recorder has at least 2 or 3 hard disks installed
- The destination hard disk is identical to the source hard disk in type and memory capacity
- The source-hard disk and the destination hard disk are not used for archiving records.

Step	Action	Menu path
1	Formatting the source hard disk for recording.	Setup Menu... > System > Storage> Information > Format > Record
2	Select the source hard disk.	Setup Menu... > System > Storage> Information > Mirror 1/2 > Source
3	Select the destination hard disk.	Setup Menu... > System > Storage> Information > Mirror 1/2 > Dest.
	Start Mirroring.	Start...
4	Results: <ul style="list-style-type: none">• The source hard disk and destination hard disk are synchronised (approx. 40 minutes for 10 GB).• All data on the destination hard disk are deleted.• All records are written to both hard disks.	
	Interrupting Mirroring.	Stop...
5	Results: <ul style="list-style-type: none">• The status of the destination hard is set to:• The hard disk can now only be used for searching for records.• If the hard disk is to be used for records or archiving, it must be formatted.	Don't use Setup Menu... > System > Storage> Information > Format > Format
6	Continuing Mirroring - see Starting Mirroring.	Start...

Administration (continued)

Determining the memory requirement of a recording

The amount of memory recorded video sequences will take up depends on the following factors:

- Picture quality
- number of images per second
- duration

The memory requirement is calculated by this formula:

$$\text{Memory requirement} = \text{picture size} \times \text{duration of recording} \times \text{images per second}$$

Calculation example: CIF resolution (PAL):

Picture quality	Picture size	Duration of recording	Approx. memory space		
			5 images/s	10 images/s	25 images/s
Basic	2.4 kB	24 hours	1.04 GB	2.07 GB	5.18 GB
Standard	4.8 kB	24 hours	2.07 GB	4.15 GB	10.37 GB
High	9.6 kB	24 hours	4.15 GB	8.29 GB	20.74 GB
Very High	14.4 kB	24 hours	6.22 GB	12.44 GB	31.10 GB

2Calculation example: 2CIF resolution (PAL):

Picture quality	Picture size	Duration of recording	Approx. memory space		
			5 images/s	10 images/s	25 images/s
Basic	4.8 kB	24 hours	2.07 GB	4.15 GB	10.37 GB
Standard	9.6 kB	24 hours	4.15 GB	8.29 GB	20.74 GB
High	19.2 kB	24 hours	8.29 GB	16.59 GB	41.47 GB
Very High	28.8 kB	24 hours	12.44 GB	24.88 GB	62.20 GB

Searching for recordings

Find first stored recording



Find last stored recording



Find recording by date and time



Calendar search

For each camera the calendar search indicates:

- the days from which there are recordings
- the time ranges of recordings on those days



Event log search

The event log search enables you to search for events based on specific criteria, such as:

- movements recorded by a specific camera
- alarm from a specific alarm input
- System events



Text-in search

The text-in search enables you to search for recordings based on specific text inputs.



Motion search

The motion search function can detect movements in recordings within defined zones for one camera. 2 types of motion search are possible:

- Motion search: Search for movement in a defined zone.
- Museum search: Search for movement of a defined object.



Copying recordings

Recordings can be written to a CD or copied to a USB memory stick.



Using calendar search

Performing a calendar search

Step	Action	Menu path
1	Open calendar search. Result: Calendar and time line are displayed.	Search > Calendar Search...
2	Select day and time	
3	Confirm input.	Go

Search



Calendar Search...

Term	Symbol	Meaning
		Date display ● Grey: No recording available ● White: Recording available
		Hours display ● White: Recording available
Select a Segment		If the date and time on the DVR have been changed (such as when switching to Summer time) there may be multiple recordings for one time from the same camera. They are stored in separate segments.

Using event log search

Performing an event log search

Step	Action	Menu path
1	Open event log search. Result: The result of the last search is displayed.	Search > Event Log Search...
2	Define criteria.	Option...
3	Confirm input. Result: List of search results is displayed.	Search
4	Select desired entry from list.	



Term	Symbol	Meaning
From First	<input checked="" type="checkbox"/> <input type="text" value="..."/>	Start date
To Last	<input checked="" type="checkbox"/> <input type="text" value="..."/>	End date
Check Time Overlap	<input checked="" type="checkbox"/>	Activates a system prompt if there are multiple recordings for the same time range
Alarm-In	<input type="checkbox"/> <input checked="" type="checkbox"/>	Alarm inputs in response to which a search for events is to start
Motion	<input type="checkbox"/> <input checked="" type="checkbox"/>	Cameras on which to search for motion detection
Video Loss	<input type="checkbox"/> <input checked="" type="checkbox"/>	Cameras on which to search for video loss
Text-In	<input type="checkbox"/> <input checked="" type="checkbox"/>	Text input devices on which to search for events
Record Channels	<input type="checkbox"/> <input checked="" type="checkbox"/>	Cameras on which to search for events
	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	Search for system events: Setup Menu... > Event > System Event > Actions

Using text-in search

Performing a text-in search

Step	Action	Menu path
1	Open text-in search. Result: The result of the last search is displayed.	Search > Text-In Search...
2	Define text inputs.	Option...
3	Confirm input. Result: List of search results is displayed.	Search
4	Select desired entry from list.	



Term	Symbol	Meaning
From First	<input checked="" type="checkbox"/> <input type="text" value="..."/>	Start date
To Last	<input checked="" type="checkbox"/> <input type="text" value="..."/>	End date
Channels	<input type="checkbox"/> <input checked="" type="checkbox"/>	Text input devices on which to search for events
		Type of text input:
	<input type="text" value="..."/>	Any Text-In Product
		Generic Text
		Epson
No.	<input checked="" type="checkbox"/>	Numbers of text elements to search for
Keyword	<input type="text" value="..."/>	Text element
Case Sensitive	<input checked="" type="checkbox"/>	Makes search case-sensitive

Using motion search

Performing a motion search

Step	Action	Menu path
1	Display desired camera in single frame.	Display > Camera > ...
2	Open motion search.	Search > Motion Search...
3	Enter settings for motion search.	Option...
4	Confirm input. Result: List of search results is generated.	Search
5	Select desired entry from list.	



Term	Symbol	Meaning
From First	<input checked="" type="checkbox"/> <input type="text" value="..."/>	Start date
To Last	<input checked="" type="checkbox"/> <input type="text" value="..."/>	End date
Type	<input type="text" value="▼"/>	Type of search: Motion Search Search for movement in a defined zone Museum Search Search for movement of a defined object.
Zone	<input type="text" value="□"/> <input type="text" value="..."/>	Definition of motion-sensitive zones for motion search or museum search: See "Zone" on page 46.
Sensitivity	<input type="text" value="▼"/>	Sensitivity of motion detection of: 1 (Dull) 2 3 4 5 (Sensitive)
Min. Blocks	<input type="text" value="..."/>	Motion search only (not museum search): Specify in how many motion-sensitive blocks motion must be detected as a minimum to trigger an alarm

Copying recordings

Copying recordings to CD or USB memory stick

Step	Action	Menu path
1	Find desired recordings. Note: Make a note of the data of the recordings you want to copy.	Search > ...
2	Define settings.	Search > Clip-Copy...
3	Start copying. Result: The recordings are copied.	Start

Search  Clip-Copy...

Term	Symbol	Meaning
Data Source	<input type="text"/>	Record
From First	<input checked="" type="checkbox"/> <input type="text"/>	Start date
To Last	<input checked="" type="checkbox"/> <input type="text"/>	End date
Channels	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assignment of cameras from which recordings are to be copied
Password	<input type="checkbox"/> <input type="text"/>	Use password, if desired
Dest.	<input type="text"/>	Destination medium:
		Internal DVD-RW
		USB-CD-RW
		1. USB Storage
		2. USB Storage
		3. USB Storage
File name	<input type="text"/>	Name of file on destination medium
Status	<input type="text"/>	Copy status

Menu descriptions – Setup menu

The Setup menu has the following sub-menus:

System menu



On the “System” menu

- the basic settings are made
- users are administered
- the system is shut down.

Network menu



On the “Network” menu the network settings are made. Network access provides access to all the functions of the DVR via

- WebGuard, same access using Internet Explorer
- RAS (Remote Administration System), independent of Internet Explorer

The DVR can be configured so that alarms trigger a notification by e-mail or notify an RAS.

Devices menu



On the “Devices” menu the connected peripheral devices are configured. Possible peripherals are:

- Cameras
- Microphones and speakers (through amplifier)
- Sirens and signal lamps
- Monitors
- Remote control for PTZ

Record menu



On the “Record” menu the following settings are made:

- Recording quality
- Timer control
- Duration of pre-event recording
- Schedule and method of archiving

Event menu



On the “Event” menu the following settings are made:

- Assignment of alarm inputs to alarms
- Configuration of motion-sensitive zones individually for each camera
- Definition of text input device and assignment to alarms
- Response to undesirable events

The event status is additionally displayed.

Setup menu

System – Information

On the “Information” menu

- basic information is entered and displayed
- software updates are installed
- recorded data are deleted as required



Term	Symbol	Meaning
Site	<input type="text" value="..."/>	Location of DVR
System ID	<input type="text" value="..."/>	Identifier for remote control <ul style="list-style-type: none">• The remote control and DVR must be set to the same ID.• If the system ID in the DVR is 0, it will respond to the remote control regardless of the remote's ID.
Language	<input type="text" value="▼"/>	Menu language
Version	<input type="text"/>	Version of DVR software
Upgrade...	<input type="checkbox"/>	Starts installing latest version of software via USB port
Import...	<input type="checkbox"/>	Import setup
Export...	<input type="checkbox"/>	Export setup
Show System Log...	<input type="checkbox"/>	Show log of all actions and events
Recorded Data		
From	<input type="text"/>	Date of oldest recording
To	<input type="text"/>	Date of newest recording
Clear All Data...	<input type="checkbox"/>	Deletes all stored data

Setup menu (continued)

System – Date/Time

On the “Date/Time” menu

- time and date settings are made
- dates of public holidays are entered
- time synchronisation is configured.



Term	Symbol	Meaning
Date	<input type="text" value="..."/>	Date
Format	<input type="text" value="v"/>	Date display format
Time	<input type="text" value="..."/>	Time
Format	<input type="text" value="v"/>	Time display format
Time Zone	<input type="text" value="v"/>	Local time zone
Use Daylight Saving Time	<input checked="" type="checkbox"/>	Activates use of summertime Daylight Saving Time



Term	Symbol	Meaning
No.	<input type="text"/>	Number of entered public holiday
Date	<input type="text" value="..."/>	Date of each desired public holiday



Term	Symbol	Meaning
Automatic Sync.	<input checked="" type="checkbox"/>	Activates synchronisation with time server
Time Server	<input type="text" value="..."/>	IP address of time server
Interval	<input type="text" value="v"/>	Synchronisation interval
Last Sync-Time	<input type="text"/>	Time of last synchronisation
Run as Server	<input checked="" type="checkbox"/>	Activates use of the DVR as the time server


Setup menu (continued)

System – Storage

On the “Storage” menu the status and usage of the available storage media is displayed.

Setup Menu...  System  Storage   Information

Term	Symbol	Meaning
Type	<input type="text"/>	Type of storage medium
Capacity	<input type="text"/>	Size of storage medium
Format	<input type="checkbox"/>	Storage medium usage >>
Information	<input type="checkbox"/>	Time range of recorded data >>
Mirror 1/2		
Source	<input type="text" value="v"/>	Source hard disk
Dest.	<input type="text" value="v"/>	Destination hard disk
Start...	<input type="text"/>	Starts the Mirroring

 Format

Term	Symbol	Meaning
		Use of storage medium:
Use as	<input type="text" value="v"/>	Record
		Archive
		Not using
		Activating permits:
Partition	<input checked="" type="checkbox"/>	DVD burn Reserves a data buffer as a separate partition. This is essential for burning DVDs, and must be activated for a storage medium with „Record“ usage.
Format	<input type="checkbox"/>	Formatting deletes the recordings from the hard disk

Setup menu (continued)

⇒ Information

Term	Symbol	Meaning
Recorded Data		
From	<input type="text"/>	Start date of recorded data
To	<input type="text"/>	End date of recorded data
Clear	<input type="checkbox"/>	Delete all recordings


Setup Menu... ⇒ System ⇒ Storage ⇒ Status

Term	Symbol	Meaning
Type	<input type="text"/>	Memory type
Disk Bad	<input type="text"/>	Data carrier status
Temperature	<input type="text"/>	Temperature status
S.M.A.R.T.	<input type="text"/>	Result of S.M.A.R.T. check



Setup menu (continued)

System – User

On the “User” menu the user groups and individual users are set up.



Term	Symbol	Meaning
Group & User Group field	<input type="text"/>	Assignment of group access privileges Table of possible group access privileges >>
Group & User User field	<input type="text" value="..."/>	Set password
+ Group...	<input type="text"/>	Add a new group
+ User...	<input type="text"/>	Add a new user Set password
Auto Login	<input type="text" value="v"/>	User to be logged in automatically
Auto Logout	<input type="text" value="v"/>	Time after which logged-in user is automatically logged out

  **Table of possible group access privileges**

Group access privilege	Meaning
Shutdown	May shut down the DVR
Upgrade	May install a new firmware version
System Time Change	May change the time setting
Data Clear	May delete recording data
Setup	May make changes anywhere on the Setup menu
Colour Control	May change the picture settings
PTZ Control	May control PTZ cameras
Alarm-Out Control	May reset alarms
Covert Camera View	May view video images from covert cameras
System Check	May interrogate system status
Record Setup	May make changes to the Record menu
Search	May use Search mode
Clip-Copy	May copy video images

Setup menu (continued)

System – Shutdown

Setup Menu... → System → Shutdown...

System – Log out user1...

Setup Menu... → System → Log out user1...


Network – Network

On the "Network" menu all settings required to ensure network access are made.

Setup Menu... → Network → Network → Network

Term	Symbol	Meaning
Transfer Speed	<input type="text" value="..."/>	Transmission bandwidth:
		(bps) bits per second
		(ips) images per second
Quality	<input type="text" value="▼"/>	Quality of picture transmission via network (PAL):
		Very High 14,4 kB/picture
		High 9,6 kB/picture
		Standard 4,8 kB/picture
		Basic 2,4 kB/picture
Remote Audio Channel	<input type="text" value="▼"/>	Selecting Audio Channel
		Select From RAS
		1 - 4

Setup menu (continued)



Term	Symbol	Meaning
		Type of connection to DVR:
Type	<input type="text" value="▼"/>	Manual <ul style="list-style-type: none"> Manual connection required input of: <ul style="list-style-type: none"> • IP Address • Gateway • Subnet Mask
		DHCP <ul style="list-style-type: none"> Automatic assignment of IP address of DNS server
		ADSL (with PPPoE) <ul style="list-style-type: none"> Requires following input as specified by provider: <ul style="list-style-type: none"> • ID • Password
		Note: Use of modem must not be activated.
DNS Server	<input type="text" value="..."/>	Address of DNS server
Port Number Setup...	<input type="text"/>	Definition of port numbers needed to access the DVR via the RAS software or via WebGuard




Term	Symbol	Meaning
Enable	<input checked="" type="checkbox"/>	Enables modem use Note: LAN type ADSL must not be enabled.
Baud Rate	<input type="text" value="▼"/>	Baud Rate
Data Bit	<input type="text" value="▼"/>	Number of data bits
Stop Bit	<input type="text" value="▼"/>	Number of stop bits
Parity	<input type="text" value="▼"/>	Parity

Setup menu (continued)

Setup Menu... ➞ Network ➞ Network ➞  DVRNS

Term	Symbol	Meaning
Use DVR Name Service	<input checked="" type="checkbox"/>	Enables the DVR name service
DVRNS Server	<input type="text" value="..."/>	IP address or domain name of DVRNS server DVRNS = Digital Video Recorder Name Service
Port	<input type="text" value="..."/>	Port for DVRNS
Use NAT	<input checked="" type="checkbox"/>	Enables NAT (Network Address Translation) use
DVR Name	<input type="text" value="..."/>	Name by which the DVR is to be registered with the DVRNS server
Check	<input type="text"/>	Check DVR name for usability after entering
Help Desk	<input type="text"/>	Information from help desk if DVRNS setting correct

Setup Menu... ➞ Network ➞ Network ➞  WebGuard

Term	Symbol	Meaning
Use WebGuard Service	<input checked="" type="checkbox"/>	WebGuard Service activated
Port	<input type="text" value="..."/>	Port for the WebGuard Service

Setup menu (continued)

Network – Notification

On the “Notification” menu the method of notification is defined.



Term	Symbol	Meaning
Enable	<input checked="" type="checkbox"/>	Enables notification by e-mail
SMTP Server	<input type="text" value="..."/>	IP address of SMTP server
Port	<input type="text" value="..."/>	Port for SMTP server Default is port 25.
Use SSL/TLS	<input checked="" type="checkbox"/>	Activates the Encryption
Authentication	<input type="checkbox"/>	Login to SMTP server
Sender	<input type="text" value="..."/>	E-mail address of sender
Recipient	<input type="text" value="..."/>	E-mail address of recipient



Term	Symbol	Meaning
LAN	<input checked="" type="checkbox"/>	Enables notification of an RAS via LAN
No.	<input type="text" value=""/>	Number of IP address
IP Address	<input type="text" value="..."/>	IP addresses of RAS PCs
Retry	<input type="text" value=""/>	Number of notification attempts by the DVR in the event of an error
Modem	<input checked="" type="checkbox"/>	Enables notification of an RAS via modem
Remote Server Phone Number	<input type="text" value="..."/>	Telephone number of the modem on the notified RAS PC
Outside Line Call	<input type="text" value="..."/>	Outside line code for external calls, if DVR's modem is connected to a PABX system
Callback Phone Number	<input type="text" value="..."/>	Telephone number of DVR's modem The RAS PC contacts the DVR on this number.

Setup menu (continued)

Devices – Camera

On the “Camera” menu the cameras are configured.



Term	Symbol	Meaning
No.	<input checked="" type="checkbox"/>	Activates the cameras
Title	<input type="text" value="..."/>	Name of camera
Use	<input type="text" value="Normal"/>	Visibility of recordings and camera data depending on user access privileges:
		Normal All users see all camera data and all recordings
		Covert 1 Users without relevant access see camera title, status symbol, but no recordings
		Covert 2 Users without relevant access see only camera title, but no recordings
Resolution	<input type="text" value="Standard"/>	Quality of recorded images
		Standard CIF
		High 2CIF
		D1 D1



Term	Symbol	Meaning
No.	<input type="text"/>	Number of camera
Product	<input type="text" value="PTZ"/>	PTZ camera type as per specified list
ID	<input type="text" value="..."/>	Unique ID of PTZ camera
Port	<input type="text" value="..."/>	Interface type of PTZ cameras
Setup...	<input type="text" value="..."/>	Settings as specified by PTZ camera manufacturer:
		Baud Rate
		Data Bit
		Stop Bit
		Parity

Setup menu (continued)

Devices – Audio

On the “Audio” menu the audio outputs are assigned to the cameras.



Term	Symbol	Meaning
No.	<input type="text"/>	Number of audio output
Associated Camera	<input type="text" value="▼"/>	Assignment of camera
Enable Audio-Out	<input checked="" type="checkbox"/>	Enables all audio outputs

Setup menu (continued)


Devices – Alarm-Out

On the “Alarm-Out” menu the alarm outputs are configured.

- “Settings” tab: The alarm outputs are configured.
- “Schedule” tab: Time slots are defined in which the alarm outputs respond in specific ways.



Term	Symbol	Meaning
No.	<input type="text"/>	Number of alarm output
Title	<input type="text" value="..."/>	Name of alarm output
Type	<input type="text" value="v"/>	Contact method of alarm output:
		NO Normally Open
		NC Normally Closed
Dwell	<input type="text" value="v"/>	Duration of alarm signal




Term	Symbol	Meaning
No.	<input type="text"/>	Number of schedule entry
Day	<input type="text" value="v"/>	Day of the week
Range	<input type="text" value="..."/>	Time range at 15-minute intervals
Mode	<input type="text" value="v"/>	Response in defined period:
		Event Alarm in response to event
		On Continuous alarm
Off No alarm		
Channels	<input type="checkbox"/> <input checked="" type="checkbox"/>	Enable
		<ul style="list-style-type: none">• Alarm outputs• internal beep by DVR

Setup menu (continued)

Devices – Display

On the “Display” menu the mode of on-screen display is configured.

- “OSD” tab: Specify what additional information is displayed on-screen.
- “Main Monitor” tab: Specify how the camera images are displayed on the main monitor.
- “Spot Monitor” tab: Specify which cameras are displayed on the spot monitors.



Term	Symbol	Displayed symbol	Meaning
Status			Activates display of:
Remote Control	<input checked="" type="checkbox"/>		Remote Control
Zoom	<input checked="" type="checkbox"/>		Visible when Zoom mode enabled
Network	<input checked="" type="checkbox"/>		Visible when DVR operating in a network
Freeze & Sequence	<input checked="" type="checkbox"/>		<ul style="list-style-type: none"> • Freeze • Visible when Sequence mode enabled
Screen Group	<input checked="" type="checkbox"/>	1/4	Displays number of groups, and their ID numbers
Free Space	<input checked="" type="checkbox"/>		<ul style="list-style-type: none"> • Visible when Recycle mode enabled • Remaining hard disk capacity, if Recycle mode not selected
Archive	<input checked="" type="checkbox"/>		Visible when archiving in progress
Date	<input checked="" type="checkbox"/>	-	Date
Time	<input checked="" type="checkbox"/>	-	Time
User Name	<input checked="" type="checkbox"/>	-	Display of user name
Camera			Activates display of:
No.	<input checked="" type="checkbox"/>	-	Display of camera number
Title	<input checked="" type="checkbox"/>	-	Display of camera title
Record	<input checked="" type="checkbox"/>		Display of Record symbols
Audio	<input checked="" type="checkbox"/>		Audio
PTZ	<input checked="" type="checkbox"/>	PTZ	Visible when PTZ camera is displayed
Text-In	<input checked="" type="checkbox"/>	-	Display of character string
Transparency		-	Transparency of menu screens
OSD Margin...		-	Distance of displayed symbols from screen margin

Setup menu (continued)

Setup Menu... → Devices → Display → Main Monitor

Term	Symbol	Meaning
		Modes of sequences in multiple playback:
Mode	<input type="text"/>	Full Sequence All cameras are switched through sequentially.
		Cameo Sequence Only the image at the bottom right is switched through; cameras in „Covert“ mode are not displayed to users without „Covert“ access.
Interval	<input type="text"/>	Time interval between picture refresh
Event Monitoring On	<input checked="" type="checkbox"/>	Displays image of relevant camera in full-screen mode when an event occurs

Setup Menu... → Devices → Display → Spot Monitor

Term	Symbol	Meaning
No.	<input type="text"/>	Number of spot monitor output
Channels	<input type="checkbox"/> <input checked="" type="checkbox"/>	Camera Selecting a camera
		Dwell Duration of display of the camera image

Devices – Remote Control

On the “Remote Control” menu the remote control function is configured.

Setup Menu... → Devices → Remote Control

Term	Symbol	Meaning
Port	<input type="text"/>	Interface type of remote control
		Setup as specified by manufacturer:
Setup...	<input type="text"/>	Baud Rate
		Data Bit
		Stop Bit
		Parity
Remote Control Product	<input type="text"/>	Remote control type as per specified list

Setup menu (continued)

Record – Record

On the “Record” menu the basic settings for recordings and their quality are made.




Term	Symbol	Meaning
Recycle	<input checked="" type="checkbox"/>	Enables automatic overwriting of the oldest recordings when the hard disk is full Note: If not enabled, recording ends when the hard disk is full.
Event Record Dwell	<input type="text"/>	Duration of recording when an event occurs
Auto Deletion	<input type="text"/>	Specify time after which automatically deleted
Use Panic Recording	<input checked="" type="checkbox"/>	Enables the panic recording function
Panic Recording Duration	<input type="text"/>	Duration of panic recording
		No Limit End panic recording by pressing PANIC button xx min. Panic recording ends after preset time or by pressing PANIC button
ips	<input type="text"/>	Number of recorded images per second in panic recording
Quality	<input type="text"/>	Picture quality of the recorded images in panic recording

Setup menu (continued)

Record – Schedule

On the “Schedule” menu the schedule for recording is defined.



Term	Symbol	Meaning	
Schedule On	<input checked="" type="checkbox"/>	Enables schedule entries Note: A recording is made only if schedule entries are enabled. Otherwise only panic recording is possible.	
No.	<input type="text"/>	Number of schedule entry	
Day	<input type="text" value="▼"/>	Day of the week	
Range	<input type="text" value="..."/>	Time range at 15-minute intervals	
Mode	<input type="text" value="▼"/>	Response:	
		No Record	-
		Time	Always record in the defined time slot in the quality set for “Time” mode
		Event	Record only in case of event in the defined time slot in the quality set for „Event“ mode
		Time & Event	Always record in the defined time slot in the quality set for “Time” mode, also in case of event in the defined time slot in the quality set for “Event” mode
Channels	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assignment of cameras to schedule	
Settings	<input type="checkbox"/> <input type="text" value="▼"/>	Picture data settings in Time and Event modes:	
		ips	Number of recorded images per second
Default...	<input type="checkbox"/> <input type="text" value="▼"/>	Picture data defaults in Time and Event modes:	
		ips	Number of recorded images per second
		Quality	Picture quality of recorded images

Setup menu (continued)

Record – Pre-Event

On the “Pre-Event” menu the settings for recording prior to the event are made.



Term	Symbol	Meaning
No.	<input checked="" type="checkbox"/>	Activates the cameras
ips	<input type="text" value=""/>	Number of recorded images per second prior to the event
Quality	<input type="text" value=""/>	Picture quality of the recorded images prior to the event
		Recording time prior to the event
Dwell	<input type="text" value="..."/>	Note: The pre-event recording memory capacity is limited. Consequently, the maximum recording time prior to the event, the number of recorded images and picture quality are inter-dependent.

Setup menu (continued)

Record – Archive

On the “Archive” menu the schedules and settings for archiving are entered.



Term	Symbol	Meaning
Archive On	<input checked="" type="checkbox"/>	Enables the archiving settings
Schedule		
Day	<input checked="" type="checkbox"/>	Day of week from which to archive recordings
Range	<input type="text" value="..."/>	Time range
Archive Data Range		
		Start of archiving, from:
From	<input checked="" type="checkbox"/> <input type="text" value="..."/>	Last Archived Time of last archiving xx/yy/200x Defined date and time
		End of archiving, up to:
To	<input checked="" type="checkbox"/> <input type="text" value="..."/>	Continue No end xx/yy/200x Defined date and time
Recycle	<input checked="" type="checkbox"/>	Enables automatic overwriting of the oldest recordings when the archive medium is full. Note: If not enabled, archiving ends when the archive medium is full.

Setup menu (continued)

Event – Alarm-In

On the “Alarm-In” menu the alarm inputs and responses to events are configured.



Term	Symbol	Meaning
No.	<input checked="" type="checkbox"/>	Enables the alarm inputs
Title	<input type="text" value="..."/>	Name of alarm input
		Contact method of alarm input:
Type	<input type="text" value="v"/>	NO Normally Open
		NC Normally Closed



Term	Symbol	Meaning
No.	<input type="text" value=""/>	Number of alarm input
Record	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assignment of cameras to record in event of alarm These cameras must be in “Event” or “Time and Event” mode within the time slot: Setup Menu... > Record > Schedule
Alarm-Out	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assign and enable <ul style="list-style-type: none"> alarm outputs internal beep by DVR These alarm outputs and the internal beep must be enabled within the time slot: Setup Menu... > Devices > Alarm-Out > Schedule
Notify	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assign and enable notifications: <ul style="list-style-type: none"> Mail Modem LAN 1 to LAN 5 Alert Window The selected function must be enabled: Setup Menu... > Network > Notification

Setup menu (continued)

Setup Menu... ➞ Event ➞ Alarm-In ➞ Actions 2

Term	Symbol	Meaning
No.	<input type="text"/>	Number of alarm input
PTZ	<input type="text"/> <input type="text"/>	Select PTZ cameras to record in event of alarm and select the desired settings
Spot Monitor	<input type="text"/> <input type="text"/>	Select spot monitor on which camera image is displayed in event of alarm

Setup menu (continued)

Event – Motion Detection

On the “Motion Detection” menu the motion-sensitive zones are defined and responses to events configured.



Term	Symbol	Meaning	
No.	<input checked="" type="checkbox"/>	Enables motion detection for the camera	
Sensitivity	<input type="checkbox"/>	Sensitivity of motion detection:	
	<input type="text"/>	Daytime	
Zone	<input type="text"/>	Nighttime	
		Select the motion-sensitive blocks within the time slot	
		Left mouse button functions:	
		<ul style="list-style-type: none"> ● Click to select/deselect ● Click - hold down - drag to define a zone for selection/deletion/back 	
		Right mouse button functions or menu in time slot to select blocks:	
	<input type="checkbox"/>	Select	Select complete row of blocks
	<input type="text"/>	Clear	Clear selection of a row
Min. Blocks		Reverse	Reverse selection of a row
	<input type="text"/>	Select All	Select all blocks
	<input type="text"/>	Clear All	Clear selection of all blocks
		Reverse All	Reverse selection of all blocks
			Specify in how many motion-sensitive blocks motion must be detected as a minimum to trigger an alarm:
Zone View	<input type="checkbox"/>	Daytime	
	<input type="text"/>	Nighttime	
Motion Ignoring Interval	<input checked="" type="checkbox"/>	Mark the motion-sensitive zones (red in event of motion)	
	<input type="text"/>	Time interval between 2 events logged as separate events:	
Daytime Setup...		Never	Each motion detection is logged as a separate event.
	<input type="text"/>	Definition of “Daytime” time range	

Setup menu (continued)

Setup Menu... ➞ Event ➞ Motion Detection ➞ Actions 1

Term	Symbol	Meaning
No.	<input type="text"/>	Number of alarm input
Record	<input type="checkbox"/> <input checked="" type="checkbox"/>	<p>Assignment of cameras to record in event of alarm</p> <p>These cameras must be in "Event" or "Time and Event" mode within the time slot:</p> <p>Setup Menu... > Record > Schedule</p>
Alarm-Out	<input type="checkbox"/> <input checked="" type="checkbox"/>	<p>Assign and enable</p> <ul style="list-style-type: none"> alarm outputs internal beep by DVR <p>These alarm outputs and the internal beep must be enabled within the time slot:</p> <p>Setup Menu... > Devices > Alarm-Out > Schedule</p>
Notify	<input type="checkbox"/> <input checked="" type="checkbox"/>	<p>Assign and enable notifications:</p> <hr/> <p>Mail</p> <hr/> <p>Modem</p> <hr/> <p>LAN 1 to LAN 5</p> <hr/> <p>Alert Window</p> <hr/> <p>The selected function must be enabled:</p> <p>Setup Menu... > Network > Notification</p>

Setup Menu... ➞ Event ➞ Motion Detection ➞ Actions 2


Term	Symbol	Meaning
No.	<input type="text"/>	Number of alarm input
PTZ	<input type="checkbox"/> <input type="text"/>	Select PTZ cameras to record in event of alarm and select the desired settings
Spot Monitor	<input type="checkbox"/> <input type="text"/>	Select spot monitor on which camera image is displayed in event of alarm

Setup menu (continued)

Event – Video Loss

On the “Video Loss” menu checking for covert cameras and the responses to events are configured.

Setup Menu... ➔ Event ➔ Video Loss ➔ Settings

Term	Symbol	Meaning
Check Obscuration		Sensitivity of check as to whether camera is covert:
		Never not checked
		126 very sensitive

Setup Menu... ➔ Event ➔ Video Loss ➔ Actions 1

Term	Symbol	Meaning
No.	<input type="text"/>	Number of covert camera
Record	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assignment of cameras to record in event of alarm
		These cameras must be in “Event” or “Time and Event” mode within the time slot: Setup Menu... > Record > Schedule
Alarm-Out	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assign and enable
		<ul style="list-style-type: none"> • alarm outputs • internal beep by DVR These alarm outputs and the internal beep must be enabled within the time slot: Setup Menu... > Devices > Alarm-Out > Schedule
Notify	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assign and enable notifications:
		Mail
		Modem
		LAN 1 to LAN 5
		Alert Window
		The selected function must be enabled: Setup Menu... > Network > Notification

Setup menu (continued)

Setup Menu... ➞ Event ➞ Video Loss ➞ Actions 2

Term	Symbol	Meaning
No.	<input type="text"/>	Number of covert camera
PTZ	<input type="text"/> <input type="text"/>	Select PTZ cameras to record in event of alarm and select the desired settings
Spot Monitor	<input type="text"/> <input type="text"/>	Select spot monitor on which camera image is displayed in event of alarm


Setup menu (continued)

Event – Text-In

On the “Text-In” menu the text input device is defined and the responses to text input are configured.



Term	Symbol	Meaning
No.	<input type="text"/>	Number of text input device
Setup	<input type="text"/>	Configuration of text input >>
Title	<input type="text" value="..."/>	Name of text input



Term	Symbol	Meaning
Port	<input type="text" value="v"/>	Interface
Setup...	<input type="text"/>	Setting as specified by manufacturer of text input device (ATM, cash-till etc.):
		Baud Rate
		Data Bit
		Stop Bit
Text-In Product	<input type="text" value="v"/>	Parity
		Type of text input:
Transaction Start	<input type="text" value="..."/>	Generic Text
		Epson
Any Character	<input checked="" type="checkbox"/>	Character string with which text input must start for the DVR to respond
Transaction End	<input type="text" value="..."/>	DVR responds to any character
0 more line(s)	<input type="text" value="v"/>	Character string with which text input must end for the DVR to respond
Line Delimiter	<input type="text" value="..."/>	Enables recording of n more lines
Ignore String	<input type="text" value="..."/>	Line delimiter as specified by the text input device manufacturer: ^J for LF or ^M for CR
		Character string in the text input which the DVR is to ignore
Case Sensitive	<input checked="" type="checkbox"/>	All transmittable character strings are specified by the text input device manufacturer.
		Case sensitivity according to text input device manufacturer's specification

Setup menu (continued)

Setup Menu... ➞ Event ➞ Text-In ➞ Actions 1

Term	Symbol	Meaning
No.	<input type="text"/>	Number of alarm input
Record	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assignment of cameras to record in event of alarm These cameras must be in "Event" or "Time and Event" mode within the time slot: Setup Menu... > Record > Schedule
Alarm-Out	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assign and enable <ul style="list-style-type: none"> alarm outputs internal beep by DVR These alarm outputs and the internal beep must be enabled within the time slot: Setup Menu... > Devices > Alarm-Out > Schedule
Notify	<input type="checkbox"/> <input checked="" type="checkbox"/>	Assign and enable notifications: Mail Modem LAN 1 to LAN 5 Alert Window The selected function must be enabled: Setup Menu... > Network > Notification

Setup Menu... ➞ Event ➞ Text-In ➞ Actions 2

Term	Symbol	Meaning
No.	<input type="text"/>	Number of alarm input
PTZ	<input type="checkbox"/> <input type="text"/>	Select PTZ cameras to record in event of alarm and select the desired settings
Spot Monitor	<input type="checkbox"/> <input type="text"/>	Select spot monitor on which camera image is displayed in event of alarm


Setup menu (continued)

Event – System Event

On the “System Event” menu the self-diagnostics and corresponding messages are configured..



Term	Symbol	Meaning
System	<input type="text"/>	System self-diagnostics interval
Check Recording	<input type="checkbox"/>	Setup... . Configuration of schedule >>
Check Alarm-In	<input type="text"/> <input type="text"/>	Interval for checking Alarm Inputs











Term	Symbol	Meaning
Schedule On	<input checked="" type="checkbox"/>	Enables schedule entries
No.	<input type="text"/>	Number of schedule entry
Day	<input type="text"/>	Day of the week
Range	<input type="text"/>	Time range at 15-minute intervals
Interval	<input type="text"/>	Checking interval



Term	Symbol	Meaning
Disk Bad Notify	<input type="text"/>	Percentage of bad sectors on hard disk as from which an alarm is triggered
Disk Almost Full Notify	<input type="text"/>	Percentage hard disk space available as from which “Disk Almost Full” alarm is triggered
Setup...	<input type="checkbox"/>	Configuration of data media S.M.A.R.T. check Opens a window in which the frequency rate and time and a temperature limit (in Celsius or Fahrenheit) for the S.M.A.R.T. check can be specified. If the temperature limit is exceeded an alarm is triggered. For details of your hard disk’s temperature limit refer to the manufacturer’s manual.

Setup menu (continued)

Setup Menu...  Event  System Event   Actions


Term	Symbol	Meaning
		Events (based on checks):
		System System check failed
		Panic Record Panic recording in progress
		Check Recording Recording check failed
		Check Alarm-In Check of alarm inputs failed
Event		Disk Almost Full Preset limit value for hard disk capacity reached
		Disk Full Hard disk full
		Disk Bad Preset limit value for number of bad sectors reached
		Disk Temperature Preset temperature limit reached
		Disk S.M.A.R.T. S.M.A.R.T. check failed
Alarm-Out	 	Assign and enable <ul style="list-style-type: none"> alarm outputs internal beep by DVR Note: Not possible for system event and panic recording
Notify	 	Assign and enable notifications: <p>Mail</p> <p>Modem (not in case of system event)</p> <p>LAN 1 to LAN 5 (not in case of system event)</p> <p>Alert Window (not in case of system event)</p> <p>The selected function must be enabled: Setup Menu... > Network > Notification</p>

Setup menu (continued)

Event – Event Status

The “Event Status” menu indicates the status of all possible events:

- Grey text: Event detection not enabled
- White text: Event detection enabled
- Flashing border: Message – acute event for 5 sec
- Yellow field: Pending event



Term	Event
Alarm-In	At alarm input 1 to 16
Check Alarm-In	Error detected at one of alarm inputs 1 to 16
Motion	Motion detected on camera 1 to 16
Video Loss	Video loss on camera 1 to 16
Text-In	Text input on text input device 1 to 16
Panic Record	Panic recording
Check Recording	On checking the recording
Disk Almost Full	On checking the data medium (only if DVR is not operating in Overwrite mode)
Disk Full	On checking the data medium (only if DVR is not operating in Overwrite mode)



Term	Meaning
Type	Memory type
Disk Bad	Data carrier status
Temperature	Data carrier status
S.M.A.R.T.	Result of S.M.A.R.T. check

WebGuard – WebWatch controls

The following diagram and table set out the functions on the Web Watch:



No.	Designation	Function
1		WebGuard Logging out
2		Open Search (WebSearch)
3	DVR	<ul style="list-style-type: none"> • Date/Time • IP Address • User Name
4		Image display modes
5	Display	Change camera name and image aspect ratio
6		Select cameras
7		Image optimisation
		PTZ camera functions
		Activate Alarm Outputs
8		Save current recording data
9		Set up image drawing mode
10	Display	Event log

WebGuard – WebSearch controls

The following diagram and table set out the functions on the Web Search:



No.	Designation	Function
1		WebGuard Logging out
2		Open Display (WebWatch)
3	DVR	Display date/time, IP address and user name
4		Zoom On/Off and image optimisation
5	Display	Change camera name and image aspect ratio
6		Playback functions
7		Image display modes
8	Display	Time bar calendar search and event log
9		Search for date/time
		Calendar search
		Event Search
10		Reload recording data
11		Set up image drawing mode
		Save any video clip as an EXE file
		Save current image as BMP or JPEG file
12		Print

Using WebGuard

WebGuard permits the following, using an Internet connection

- View current video images
- Search and view recorded records

Requirements:

- The Internet connection is set up and the WebGuard service is activated.
- A PC with Internet access to the DVR must be available.
- Internet Explorer must be installed on the PC.

Using WebGuard

Step	Action
1	Ask your System Administrator about the current access data.
2	Start Internet Explorer. Enter the access data in the address line, e.g.: 192.168.1.129:12088
3	Enter your User Name (admin), Password (blank) and if necessary the port addresses.
4	Select Login. Result: WebGuard window is opened.

Specifications DTR-6008

Model	DTR-6008/250CD	DTR-6008/500CD	DTR-6008/750CD
EDP No.	71942	71961	71962
Video standard	PAL/NTSC (auto detection)		
Remark	-		
Event logs	Unlimited number of entries for alarm/event/text messages, loss of signal		
Security against unauthorised use	Key locking, 64 user groups with programmable access (up to 256 users)		
Transmission rate	100 images per sec (PAL)		
Alarm triggering	E-mail, remote SW (RAS)		
Alarm activation	Automatic multi-screen display of alarm images programmable		
Remote Control	Wireless IR remote control (included)		
Text display interface	ATM/POS, 10 channels max.		
Monitor display	Real-time playback: 25 field images per sec (PAL), 30 field images per sec (NTSC) per camera		
Covert camera mode	Programmable		
Time synchronisation	Network time log, network time server		
System change log	Up to 5000 entries for login/logout, configuration changes, remote access, change of signal connection, disk read/write errors		
Zoom function	2x-4x		
Playback	Frame image, 4-/8-channel split		
Post-alarm recording	Up to 15 minutes		
VGA	-		
Control interface	RS-485 port for PTZ control (verified logs: eneo-Fastrax, Pelco P/D) or keyboard connection for remote control		
Activity detection	Programmable 16 x 16 (256) grid, 5 sensitivity settings		
Simplex/Duplex/Triplex/Pentaplex mode	Triplex		
Video inputs	8x 1 Vp-p, (F)BAS, 75 Ohm, BNC, loop-through		
Monitor outputs	4x Spot-Outputs 1Vss, (F)BAS, 75 Ohm, BNC, 1x VGA		
Video output	1x 1 Vp-p, (F)BAS, 75 Ohm, BNC; 1x S-VHS, S= 1 Vp-p, C= 0.3 Vp-p, 75 Ohm		
Audio input	4x amplifier input, cinch		
Audio output	1x amplifier output, cinch		
Resolution	720 x 576 pixels (display)		
Compression method	MPEG-4, higher compression rates with same picture quality enable maximum recording times		
Recording speed	200 field image per sec at CIF resolution (336 x 272 pixels/PAL), 100 field image per sec at 2CIF resolution (672 x 272 pixels/PAL) 50 field image per sec at D1 resolution (720 x 576 pixels/PAL)		

Specifications DTR-6008 (continued)

Model	DTR-6008/250CD	DTR-6008/500CD	DTR-6008/750CD
Picture size	Basic: 2/2.4 kB; Standard: 4/4.8 kB; High: 8/9.6 kB; Very high: 12/14.4 kB (NTSC/PAL). 2 times larger in High Resolution mode		
Hard disk capacity	250 GB ATA hard disk, expandable to as many as 3 internal hard disks	500 GB ATA hard disk, expandable to as many as 3 internal hard disks	750 GB ATA hard disks
Playback speed	200 field image per sec at CIF resolution (336 x 272 pixels/PAL) and Duplex		
Export of picture data	via USB 2.0, SCSI port, CD writer. Network data export: Clip Player, AVI, JPG, BMP		
Alarm inputs	8x TTL, programmable as NC/NO (terminal strip)		
Alarm outputs	8x TTL, open collector (terminal strip)		
Alarm reset	2~4 TTL (terminal strip)		
Alarm messages	System error, hard disk error		
Pre-alarm recording	Up to 30 minutes		
Recording medium	ATA-2 (EIDE) hard disks, built-in CD-RW writer		
Archiving	With EIDE, SCSI and USB hard disks. Real-time mirroring		
Menu languages	German, English, Italian, French, Spanish, Polish, Russian, Czech, Hungarian		
Ethernet port	10Base-T, 100Base-TX, RJ-45		
Remote software	For remote administration and image search function (RAS plus included)		
Ports	3x USB, 1x RS-485, 1x RS-232 (remote control/configuration or modem), 1x SCSI for memory expansion		
Power Supply	100 VAC~230VAC, 50/60Hz		
Power consumption	approx. 150 W		
Temperature range	5°C to 40°C		
Housing	Metal with plastic front panel		
Colour	Pantone 427C		
Dimensions (H x W x D)	88 x 430 x 405 mm		
Weight	approx. 7.4 kg		

Specifications DTR-6016

Model	DTR-6016/250CD	DTR-6016/500CD	DTR-6016/750CD
EDP No.	71929	71959	71963
Video standard	PAL/NTSC (auto detection)		
Remark	-		
Event logs	Unlimited number of entries for alarm/event/text messages, loss of signal		
Security against unauthorised use	Key locking, 64 user groups with programmable access (up to 256 users)		
Transmission rate	100 images per sec (PAL)		
Alarm triggering	E-mail, remote SW (RAS)		
Alarm activation	Automatic multi-screen display of alarm images programmable		
Remote Control	Wireless IR remote control (included)		
Text display interface	ATM/POS, 10 channels max.		
Monitor display	Real-time playback: 25 field images per sec (PAL), 30 field images per sec (NTSC) per camera		
Covert camera mode	Programmable		
Time synchronisation	Network time log, network time server		
System change log	Up to 5000 entries for login/logout, configuration changes, remote access, change of signal connection, disk read/write errors		
Zoom function	2x-4x		
Playback	Frame image, 4-/9-/16-channel split		
Post-alarm recording	Up to 15 minutes		
VGA	-		
Control interface	RS-485 port for PTZ control (verified logs: eneo-Fastrax, Pelco P/D) or keyboard connection for remote control		
Activity detection	Programmable 16 x 16 (256) grid, 5 sensitivity settings		
Simplex/Duplex/Triplex/Pentaplex mode	Triplex		
Video inputs	16x 1 Vp-p, (F)BAS, 75 Ohm, BNC, loop-through		
Monitor outputs	4x Spot-Outputs 1Vss, (F)BAS, 75 Ohm, BNC, 1x VGA		
Video output	1x 1 Vp-p, (F)BAS, 75 Ohm, BNC; 1x S-VHS, S= 1 Vp-p, C= 0.3 Vp-p, 75 Ohm		
Audio input	4x amplifier input, cinch		
Audio output	1x amplifier output, cinch		
Resolution	720 x 576 pixels (display)		
Compression method	MPEG-4, higher compression rates with same picture quality enable maximum recording times		
Recording speed	400 field image per sec at CIF resolution (336 x 272 pixels/PAL), 200 field image per sec at 2CIF resolution (672 x 272 pixels/PAL) 100 field image per sec at D1 resolution (720 x 576 pixels/PAL)		

Specifications DTR-6016, continued

Model	DTR-6016/250CD	DTR-6016/500CD	DTR-6016/750CD
Picture size	Basic: 2/2.4 kB; Standard: 4/4.8 kB; High: 8/9.6 kB; Very high: 12/14.4 kB (NTSC/PAL). 2 times larger in High Resolution mode		
Hard disk capacity	250 GB ATA hard disk, expandable to as many as 3 internal hard disks	500 GB ATA hard disk, expandable to as many as 3 internal hard disks	750 GB ATA hard disks
Playback speed	400 field image per sec at CIF resolution (336 x 272 pixels/PAL) and Duplex		
Export of picture data	via USB 2.0, SCSI port, CD writer. Network data export: Clip Player, AVI, JPG, BMP		
Alarm inputs	16x TTL, programmable as NC/NO (terminal strip)		
Alarm outputs	16x TTL, open collector (terminal strip)		
Alarm reset	2~4 TTL (terminal strip)		
Alarm messages	System error, hard disk error		
Pre-alarm recording	Up to 30 minutes		
Recording medium	ATA-2 (EIDE) hard disks, built-in CD-RW writer		
Archiving	With EIDE, SCSI and USB hard disks. Real-time mirroring		
Menu languages	German, English, Italian, French, Spanish, Polish, Russian, Czech, Hungarian		
Ethernet port	10Base-T, 100Base-TX, RJ-45		
Remote software	For remote administration and image search function (RAS plus included)		
Ports	3x USB, 1x RS-485, 1x RS-232 (remote control/configuration or modem), 1x SCSI for memory expansion		
Power Supply	100 VAC~230VAC, 50/60Hz		
Power consumption	approx. 150 W		
Temperature range	5°C to 40°C		
Housing	Metal with plastic front panel		
Colour	Pantone 427C		
Dimensions (H x W x D)	88 x 430 x 405 mm		
Weight	approx. 10.2 kg		

Accessories

EDP No.	Short description
71857	250GB hard disk for DLR/DXR/DTR and DCR
71919	500GB hard disk for DLR/DXR/DTR and DCR
71970	CD/DVD Writer DVD+/-RW 48x/18x, CD/DVD
74088	System keyboard with 3-axis joystick
74092	System keyboard with joystick, 5" monitor
71902	USB mouse for DVR series DXR, DLR3

Supported PTZ cameras

Manufacturer	Designation
Costar	CDC 2500
Dyna Color	CDC2400
Chilsung	CRD-J6416
Fine	CRR-1660s
Pelco	D-log
Dennard	Dennard2060
Tokina	DMP-1223
Dongyang Unitech	DRX-500
Dongyang	DY-255RXC
Sensormatic	Delta Dome II/Ultra IV
Eneo	Fastrax
Philips	G3 Basic AutoDome
LG Honeywell)	GRU604A
JVC	TK-S576
Sensormatic	Ultra VI
Canon	VC-C4
Canon	VC-C50i
Inter-M	VRX-2201
Vicon	Vicon
Hitron	22x AF Zoom
360Vision	VisionDome
Panasonic	WJ-SX550A
Panasonic	WV-CS850/854
CBC	ZC-SD622J
Samsung	Zoom Camera
Honeywell	HDC-655
LG Honeywell	HSD-25X
Honeywell	HSDN-251
Idis	IRX-100
Ultrak	KD6
Ultrak	KD6 Z-series
Kalatel	KTD-312
LG	LPT-A100L
	Novus-C
Samsung	MRX-1000

Manufacturer	Designation
Ademco Video	Orbiter Microsphere
SysMania	ORX_1000
Linlin	PIH-717
ELMO	PTC-200C/CVAS
ELMO	PTC-250C
Pacom	Pacom 2036
Dongyang	Power Controller
Sungjin	Receiver/MPU
Costar	SIC722V
Samsung Techwin	SPD 1600
Samsung	Samsung Dome
Pelco	Spectra Dome
Samsung Techwin	SRX-100B
Hitron	Speed Dome

Index

A

- Accessories 65
- Alarm
 - Configuring inputs 47
 - Configuring outputs 40
 - Connecting inputs 8
 - Connecting outputs 8
 - Motion Detection 50
 - Resetting 9
 - Setting schedule for outputs 40
 - Setting signal duration 40
- Ambient conditions 3, 62
- Archiving
 - Configuring 46
 - Memory requirement 21, 46
 - Setting schedule 46
- Assigning cameras
 - Alarm-In 47
 - Motion Detection 49, 50
 - Text-In 54
 - Video Loss 51
- Assigning PTZ cameras
 - Alarm-In 48
 - Motion Detection 49, 50
 - Text-In 54
 - Video Loss 52

B

- Basic functions 7

C

- Calendar search 23
- Cameo 42
- Cleaning 3
- Clip-Copy 27
- Configuring a pre-event 45
- Configuring audio outputs 39
- Configuring event responses 47
- Configuring Motion Detection 49
- Configuring panic recording 43
- Configuring PTZ cameras 38
- Configuring remote control 42
- Configuring text input as event 53
- Configuring the cameras 38
- Configuring video loss as event 51
- Connecting cameras 8
- Connections 8
- Control options 7

- Control protocols 66
- Controls
 - Front panel 9
 - Remote Control 11
 - WebSearch 59
 - WebWatch 58
- Copying recordings 27
- Covert mode 19, 38

D

- Date setting 30
- Defining group access rights 33
- Defining motion-sensitive zones 49
- Display
 - Configuring 41
 - Hiding 19, 38
- Displaying event status 57
- Display menu
 - Access 14
- Disposal 70
- DVRNS
 - Network configuration 36
- Dwell 40

E

- E-mail Notification 37
- EMC class 3
- Enabling notification
 - Alarm-In 47
 - Motion Detection 50
 - System Event 56
 - Text-In 54
 - Video Loss 51
- Event
 - Configuring a pre-event 45
 - Configuring responses 47
 - Defining motion-sensitive zones 49
 - Displaying status 57
 - Setting recording time 43
 - System events 55
 - Text input 53
 - Video Loss 51
- Event log 24

F

- Front panel 9
 - Controls 9, 10

Index (continued)

G

- Getting started
 - Video recorder 3, 16

H

- Hard disks
 - Mirroring 20, 31
- Health Check 55

I

- IP Address 35, 36

L

- LAN
 - Network configuration 35

M

- Memory requirement
 - Archiving 21, 46
 - Recording 21
- Memory type 31
- Menu descriptions
 - Search menu 22
 - Setup menu 28
- Menu structure 12
- Mirroring of hard disks 20, 31
- Modem
 - Network configuration 35
- Monitor
 - Configuring display 41
 - Configuring display sequence 42
 - Connecting 8
- Motion Search 26

N

- Network configuration 34
- Network settings
 - DVRNS 36
 - LAN 35
 - Modem 35

P

- Package contents 7
- PANIC 9, 43
- PTZ-menu
 - Access 14

- PTZ cameras
 - Connecting 8
 - Supported cameras 66

R

- Recording
 - Copying 27
 - delete 18
 - Memory requirement 21
 - Search 22
 - Setting schedule 44
- Recreate factory settings 19
- Recycling the device 70
- Remote Control
 - Controls 11
 - Setting system ID 16, 29
- Reset 8, 19

S

- Safety instructions 3
- Schedule
 - Setting for alarm 40
 - Setting for archiving 46
 - Setting for recording 44
- Search
 - Calendar search 23
 - Event log 24
 - Motion Search 26
 - Text-In 25
- Search-menu
 - Access 15
 - Setting a password 33
 - Setting automatic overwrite 43
 - Setting menu language 29
 - Setting recording quality 43
 - Setting system ID for remote control 29
 - Setting the duration of records in an event occurrence 43
 - Setting up a concealed camera 19, 38
 - Setting up Notification 37
 - Setting up user groups 33
 - Setting up users 33
- Setup menu
 - Access 15
 - Menu descriptions 28
- Shutdown 17
- Software updates 19
- Software version 29
- Specifications 61

Index (continued)

- Specifying public holidays
30
- Spot Monitor
 - Assigning a camera 42
 - Connecting 8
- Storage media
 - Displaying status 31
 - Displaying usage 31
 - Setting automatic overwrite 43
- Switching off 17
- Switching on 17
- System
 - Export setup 29
 - Import setup 29
 - Logging out as USER 34
 - Shutdown 34
- System events
 - Configuring 55
 - Health Check 55

T

- Text-in search 25
- Time
 - Setting 30
 - Synchronising 30

W

- WebGuard
 - Controls 58, 59
 - Use 60
- WebSearch
 - Controls 59
 - Use 60
- WebWatch
 - Controls 58
 - Use 60

Notes on disposal

Correct disposal of this DVR



WEEE (Waste Electrical & Electronic Equipment)

Applicable in the member states of the European Union and other European countries with a separate collection system

The marking on the DVR and on the documentation stipulates that it must not be thrown away in normal domestic waste at the end of its useful life.

General rules

- ▶ Avoid uncontrolled waste disposal: Please dispose of this DVR separately from other waste, so as to avoid posing a hazard to the environment and to human health.
- ▶ Recycle the DVR in order to aid the sustainable reuse of material resources.

Private users

- ▶ Contact the retailer from whom you purchased the DVR or your competent local authority to find out how you can recycle the DVR in an environmentally friendly way.

Commercial users

- ▶ This DVR must not be thrown away with trade waste. To clarify the conditions of disposal, check your purchase contract or contact your supplier.



eneo® is a registered trademark of Videor Technical E. Hartig GmbH

Exclusive distribution through specialised trade channels only.

VIDEOR TECHNICAL E. Hartig GmbH
Carl-Zeiss-Str. 8 · 63322 Rödermark, Germany
Tel. +49 (0) 6074 / 888-0 · Fax +49 (0) 6074 / 888-100
www.videortechnical.com

Operating Instructions version 03/2008 (V1.0)
Subject to technical change without notice.
© Copyright by VIDEOR TECHNICAL 2008