

Specifications



COMBINE8™

IEM Transmitter Combiner

The COMBINE8 UHF transmitter combiner actively combines signals from up to eight (8) in-ear monitor transmitters into a single transmitting antenna, reducing clutter, signal interference, and lowering the probability of intermodulation artifacts.

Included Accessories

- (8X) BNC Jumpers
- (1X) AC Cable
- (1x) Auxillary AC Power Cable



1. Power switch

2. Signal indicator

3. Antenna output
4. BNC transmitter inputs

5. AC power input

WARNING

• Do not expose this appliance to heat or moisture.


• To avoid shock, do not remove cover. Refer all service to qualified service personnel or distributors.

Specifications	
Frequency range.....	470-608 MHz
Input connectors.....	8X BNC
Full system gain.....	0 dB (±2 dB)
Maximum RF input power	+18 dBm (60 mW)
LED indicator (input signal threshold)	> +5 dBm (Threshold power)
Power consumption.....	36 W
I / O.....	8X RF inputs. 1 antenna out.
Input AC voltage	100-240 VAC, 50/60 Hz, Max 1.5A
Dimensions.....	480(W) X 45(H) X 260(D) mm
Weight	3.7 Kgs

COMBINE8

IEM Transmitter Combiner

8 Channel Distribution Diagram

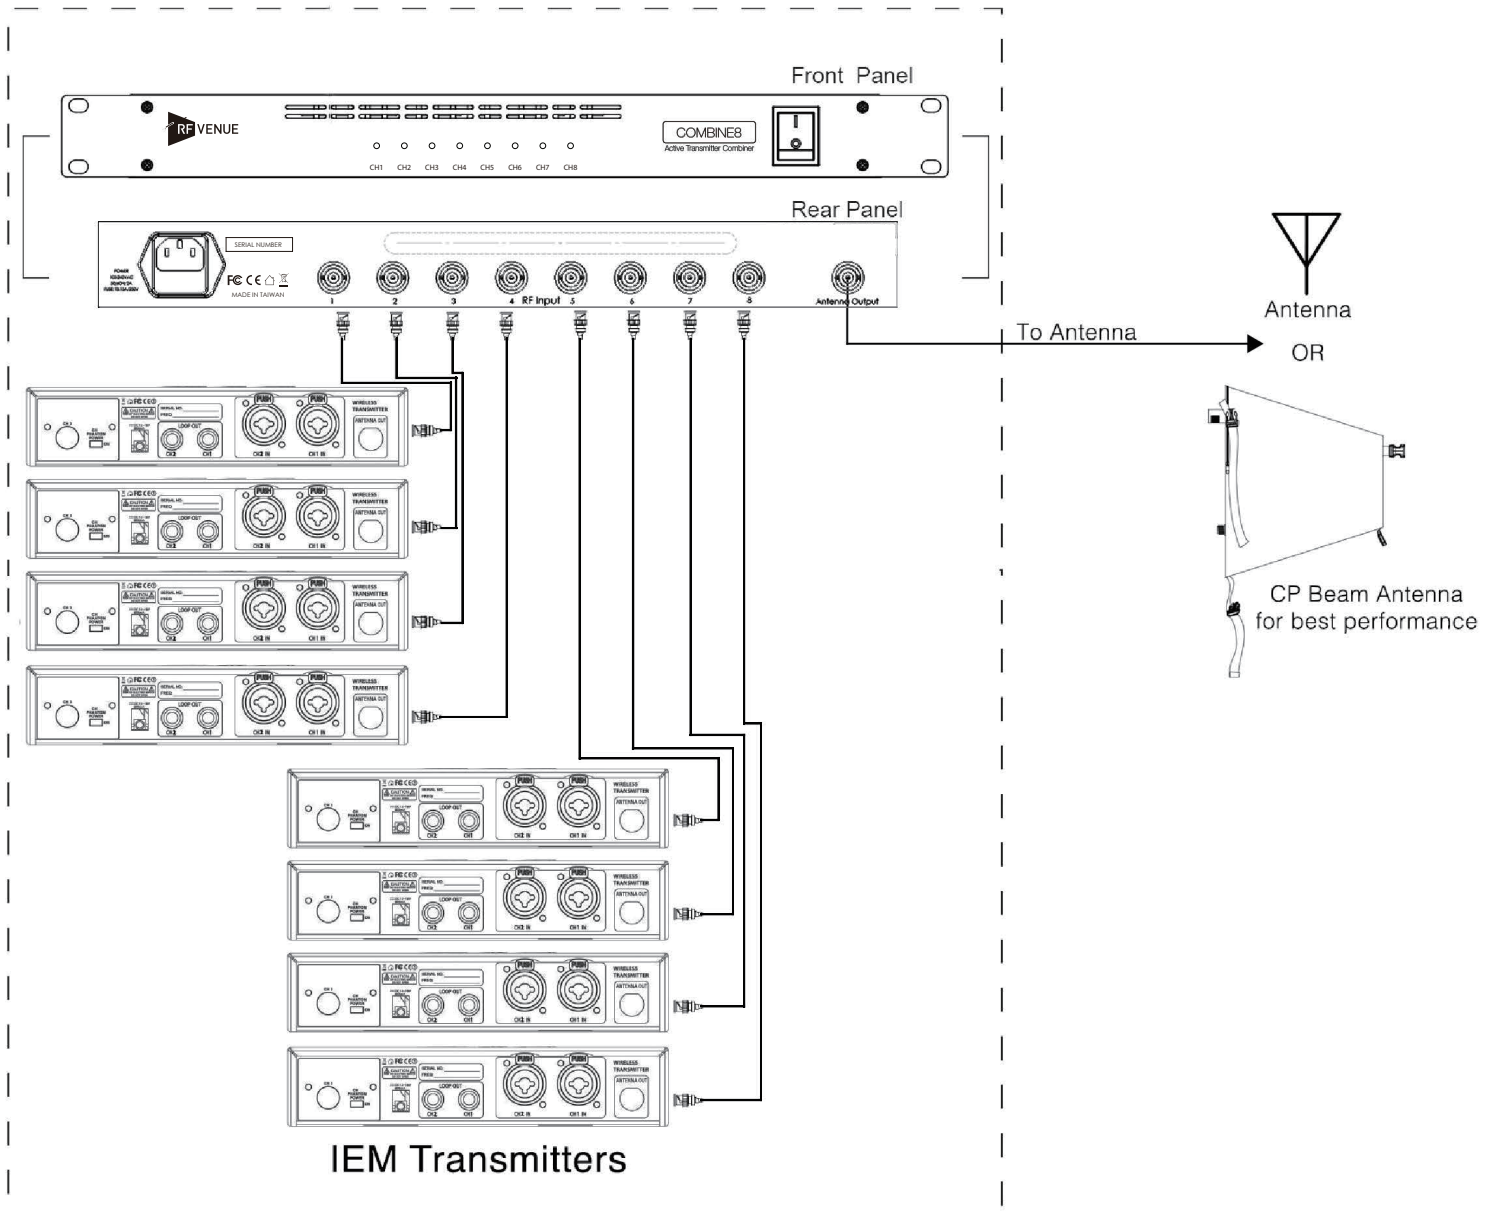

Notes

- The input power for each channel cannot exceed 60 mW (18 dBm).
- Combining units for additional transmitters is not recommended.
- Turn off power before disconnecting cables and antennas, and when device is not in use.