


S5007B manual

1. functions

- indoor temperature and humidity
- outdoor temperature and humidity
- MAX/MIN record of the temp/humidity in the past 24 hours
- °C/°F switch over
- Backlight function
- Two function keys: C/F, MAX/MIN
- Up to 3 channels RF433 wireless outdoor sensor

2. LCD display

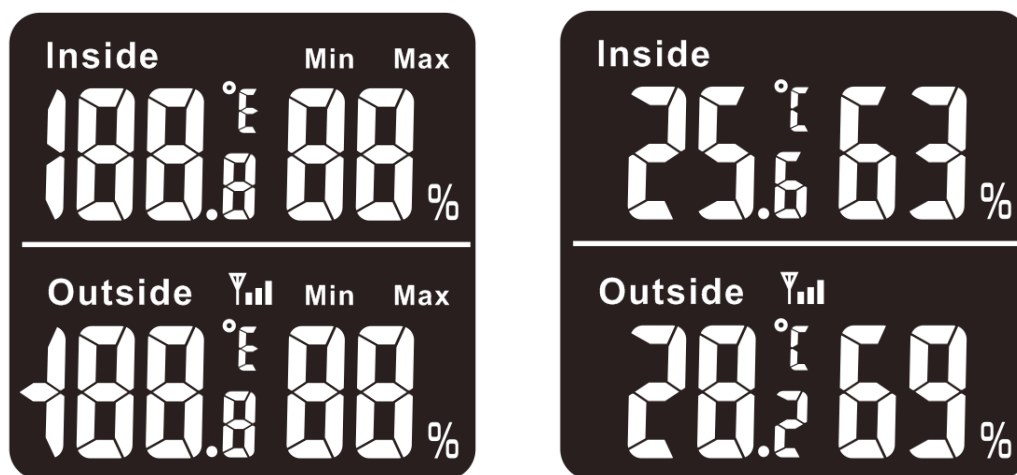

3. Default data:

- After power on, full display for 3 seconds then enter normal display. .
- Default temperature is °C

4. Operations:

Press any key will turn on the backlight for 5 seconds.

【C/F】

- Short press C/F to switch over between C and F

【MAX/MIN】

- Short press MAX/MIN to check the MAX and Min records
- Long press MAX/MIN for 3 seconds to clear the records

5. Temperature:

- Testing scope of indoor unit: 0~50°C, display LL.L when temp is lower than 0 while display HH.H when temp is higher than 50°C
- Testing scope of outdoor unit: -30~70°C, display LL.L when temp is lower than -30 while display HH.H when temp is higher than +70°C
- Tolerance: ± 1 C

6. Humidity :

- Testing scope 20%RH~95%RH,
- display LL.L when temp is lower than 20% while display HH.H when temp is higher than 95%
- tolerance: ± 5 %RH

7. Wireless connecting

Power on the indoor unit, device will start receiving signal automatically for 3 minutes, display the data when received. Or display --.- when no signal received.

Power on the outdoor unit, the transmitter will flash red and transmit the signal automatically once every 50 seconds.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of

the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance

could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following

two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.