

Installation

# ID ISC.LRU3000 / ID ISC.LRU3500

**UHF Long Range Reader**



## Note

© Copyright by  
FEIG ELECTRONIC GmbH  
Lange Strasse 4  
D-35781 Weilburg (Germany)  
Tel.: +49 6471 3109-0  
<http://www.feig.de>  
[identification-support@feig.de](mailto:identification-support@feig.de)

With the edition of this document, all previous editions become void. Indications made in this manual may be changed without previous notice.

Copying of this document and giving it to others and the use or communication of the contents thereof are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Composition of the information in this document has been done to the best of our knowledge. FEIG ELECTRONIC GmbH does not guarantee the correctness and completeness of the details given in this manual and may not be held liable for damages ensuing from incorrect or incomplete information. Since, despite all our efforts, errors may not be completely avoided, we are always grateful for your useful tips.

The instructions given in this manual are based on advantageous boundary conditions.

FEIG ELECTRONIC GmbH does not give any guarantee promise for perfect function in cross environments and does not give any guarantee for the functionality of the complete system which incorporates the subject of this document.

FEIG ELECTRONIC GmbH calls explicit attention that devices which are subject of this document are not designed with components and testing methods for a level of reliability suitable for use in or in connection with surgical implants or as critical components in any life support systems whose failure to perform can reasonably be expected to cause significant injury to human health. To avoid damage, injury or death the user or application designer must take reasonably prudent steps to protect against system failures.

FEIG ELECTRONIC GmbH assumes no responsibility for the use of any information contained in this document and makes no representation that they are free of patent infringement. FEIG ELECTRONIC GmbH does not convey any license under its patent rights nor the rights of others.

## Contents

<b>1</b>	<b>Safety Instructions / Warning - Read before start-up !</b>	<b>5</b>
<b>2</b>	<b>Performance Features of Reader Family ID ISC.LRU3000</b>	<b>6</b>
<b>2.1</b>	<b>Performance features.....</b>	<b>6</b>
<b>2.2</b>	<b>Available Reader types .....</b>	<b>6</b>
<b>2.3</b>	<b>Available Accessories.....</b>	<b>6</b>
<b>3</b>	<b>Installation</b>	<b>7</b>
<b>4</b>	<b>Terminals</b>	<b>8</b>
<b>4.1</b>	<b>Antenna Connection.....</b>	<b>9</b>
<b>4.2</b>	<b>Power Supply.....</b>	<b>10</b>
4.2.1	Power Supply via connection X1 .....	10
4.2.2	Power Supply via Power over Ethernet (PoE) .....	11
<b>4.3</b>	<b>Interfaces .....</b>	<b>12</b>
4.3.1	Ethernet Interface on connector X2 (10/100Tbase) .....	12
4.3.2	USB Interface on connector X3 (Host Kommunikation) .....	12
4.3.3	USB Host Interface on connector X4.....	13
4.3.4	RS232 Interface on connector X6.....	13
4.3.5	RS485 Interface on connector X6.....	14
4.3.6	Data-Clock Interface on connector X5 for Scan Mode only.....	15
<b>4.4</b>	<b>Digital Inputs on connector X5 .....</b>	<b>17</b>
<b>4.5</b>	<b>Outputs on connector X5.....</b>	<b>19</b>
4.5.1	Digital outputs on connector X5.....	19
4.5.2	Relay outputs on connector X5 .....	20
<b>5</b>	<b>Operating and Display Elements</b>	<b>21</b>
<b>5.1</b>	<b>Status LEDs .....</b>	<b>21</b>
<b>5.2</b>	<b>Reset Push Buttons.....</b>	<b>22</b>
<b>5.3</b>	<b>Reader Power adjustment.....</b>	<b>23</b>
5.3.1	EU-Reader according to EN302 208 .....	23

---

<b>6</b>	<b>Technical Data</b>	<b>25</b>
<b>7</b>	<b>Radio Approval</b>	<b>27</b>
<b>7.1</b>	<b>Europe (CE)</b> .....	<b>27</b>
<b>7.2</b>	<b>USA (FCC) and Canada (IC)</b> .....	<b>28</b>
7.2.1	USA (FCC) and Canada (IC) warning notices .....	28
7.2.2	Label Information .....	29
7.2.3	Installation with FCC / IC Approval .....	29
7.2.4	USA (FCC) and Canada (IC) approved antennas.....	29
<b>Annex A:</b>	<b>Accessories Following optional accessories are available:</b> .....	<b>30</b>

## 1 Safety Instructions

- ▶ The device may only be used for the intended purpose designed by for the manufacturer.
- ▶ The operation manual should be conveniently kept available at all times for each user.
- ▶ Unauthorized changes and the use of spare parts and additional devices which have not been sold or recommended by the manufacturer may cause fire, electric shocks or injuries. Such unauthorized measures shall exclude any liability by the manufacturer.
- ▶ The liability-prescriptions of the manufacturer in the issue valid at the time of purchase are valid for the device. The manufacturer shall not be held legally responsible for inaccuracies, errors, or omissions in the manual or automatically set parameters for a device or for an incorrect application of a device.
- ▶ Repairs may only be executed by the manufacturer.
- ▶ Installation, operation, and maintenance procedures should only be carried out by qualified personnel.
- ▶ Use of the device and its installation must be in accordance with national legal requirements and local electrical codes .
- ▶ When working on devices the valid safety regulations must be observed.
- ▶ This device is not suitable to be used in places where children are present. Prevent children access to the device.
- ▶ Equipment is intended for use only in restricted access area.
- ▶ Special advice for carriers of cardiac pacemakers:  
Although this device doesn't exceed the valid limits for electromagnetic fields you should keep a minimum distance of 25 cm between the device and your cardiac pacemaker and not stay in an immediate proximity of the device respective the antenna for some time.

**IDENTIFICATION****2 Performance Features of Reader Family ID ISC.LRU3000****2.1 Performance features**

The Reader has been developed for reading passive data carriers, so-called „Smart Labels“, using an operating frequency in the UHF range.

**2.2 Available Reader Types**

The following Readers are available:

Table 1: Available Reader Types

Reader type	Description
ID ISC.LRU3500-EU	Device version for Europe with PoE
ID ISC.LRU3000-EU	Device version for Europe without PoE
ID ISC.LRU3500-FCC	Device version for USA with PoE
ID ISC.LRU3000-FCC	Device version for USA without PoE

**2.3 Available Accessories**

The following optional accessories are currently available:

Table 2: Optional Reader Accessories

Reader type	Description
ID ISC.LR.CSC-IP64 Connector Sealing Cap	<p>Protection cap for IP 64 Art.No.: 3558.000.00</p> 
ID ISC.LRU3x00-MS Mounting Rail Set	<p>Rail Mounting Set for ID ISC.LRU3000/3500 Art.No.: 3831.000.00</p>

See also: ANNEX-A

### 3 Installation

The Reader is designed for wall-mount, including outdoors. Holes for mounting on a wall are provided in the housing.

For outdoor installation, the protective cap must be used according to the list in chapter **Annex A-Accessories**.

It is not necessary to open the reader housing mounting.

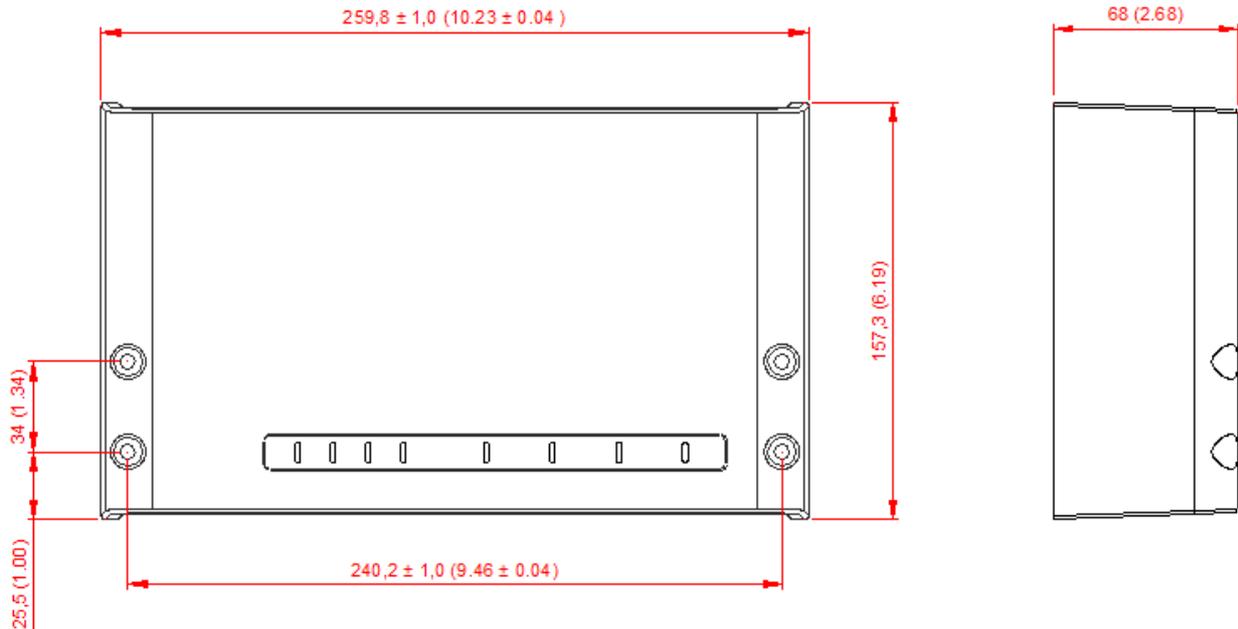


Fig. 1: Installation Drawing

## 4 Terminals

On the lower side of the reader housing the different cable connectors are positioned. Figure 2 shows the arrangement of the connectors and table 3 shows which connection for the different cables are used for. Table 4 shows the available push buttons.

### ① HINWEIS:

At the connections X1 to X6 may be connected only devices or power supplies whose voltage and power at the connector do not exceed the connection classes ES1 and PS2, according to EN 62368-1.

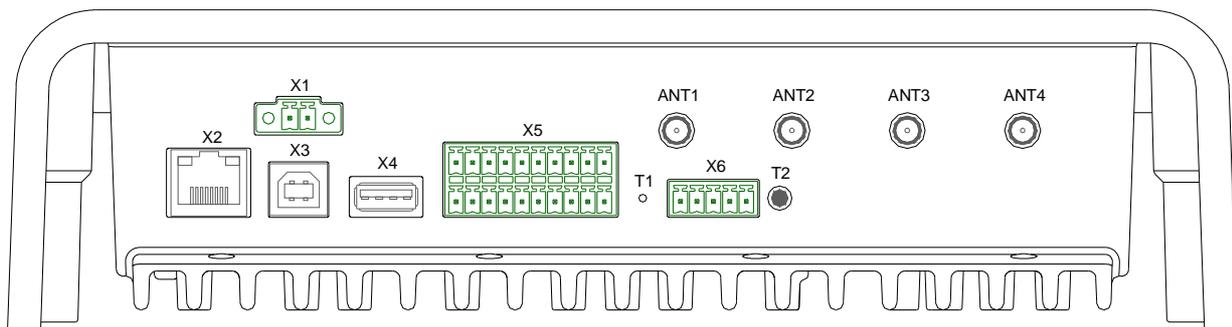


Fig. 2: Connection Overview

Table 3: Connection terminals

Connector	Description
ANT 1-4	<a href="#">Connection of the external antennas (Impedance 50Ω)</a>
X1	<a href="#">Power supply 24VDC +-5%</a>
X2	<a href="#">10/100Tbase network connection with RJ-45 (with PoE)</a>
X3	<a href="#">USB interface for host communication</a>
X4	<a href="#">USB Host Interface on connector X4</a>
X5	<a href="#">Digital input and output and relay output</a>
X6	<a href="#">RS232 / 485 interface</a>

Table 4: Push button function

Push button	Description
T1	<a href="#">Internal push button for complete configuration reset</a>
T2	<a href="#">External push button for CPU-Reset</a>

## 4.1 Antenna Connection

The external SMA antenna connectors are positioned on the lower side of the reader.

The maximum tightening torque for the SMA sockets is 0.45 Nm (4.0 lbf in).

### ⓘ CAUTION:

- Exceeding the tightening torque will destroy the plug.

Table 5: External antenna connection

Terminal	Description
ANT 1 - 4	Connection for external antennas (input impedance 50Ω)

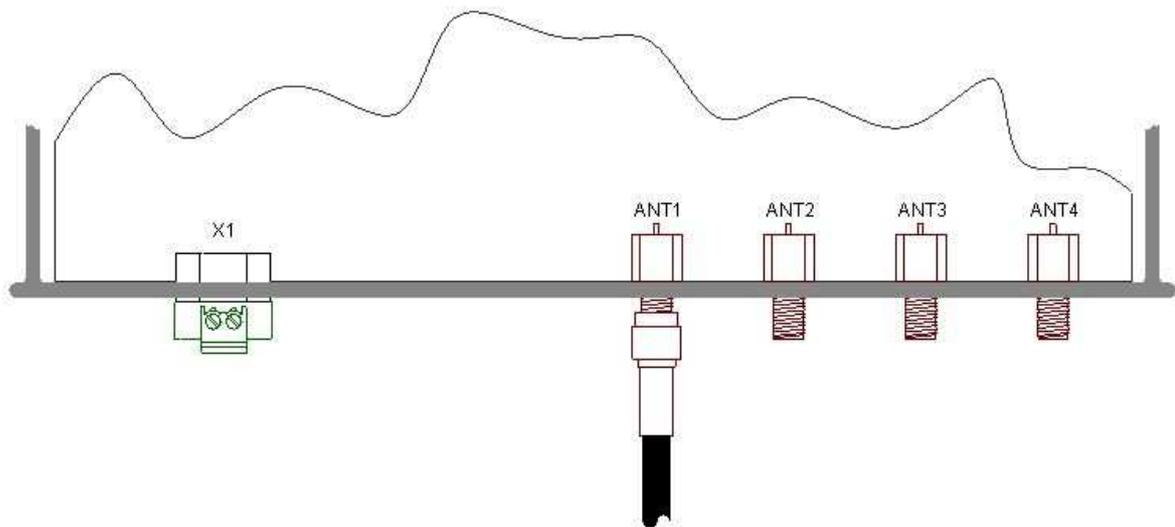


Fig. 3: External antenna connection ANT1-4 and X1 for the power supply

### ⚠ CAUTION:

**A direct connection of an antenna to an antenna output with activated DC Voltage (24 VDC, 500 mA) may damage the antenna.**

## 4.2 Power Supply

### 4.2.1 Power Supply via connection X1

The supply voltage of 24 V DC has to be connected to Terminal X1

Table 6: Pin assignment for power supply

Terminal	Abbreviation	Description
X1 / Pin 1	VDC	Vcc – supply voltage 24VDC +-5%
X1 / Pin 2	GND	Ground – supply voltage




Fig. 4: Connection for the power supply

**⚠ CAUTION:**

- *The reader may only be powered from a power supply with a integrated current limiting according to EN 62368-1 Annex Q.1 or with a NEC Class 2/LPS certified external power supply.*
- *Reversing the polarity of the supply voltage may destroy the device.*
- *Each reader has to be supplied by a separate external power supply.*
- *An operation of an ID ISC.LRU3500 via an external power supply and Power over Ethernet (PoE) at the same time is not recommended and can cause interferences during operation.*

#### 4.2.2 Power Supply via Power over Ethernet (PoE)

Optional the reader (only LRU3500) can be powered via the LAN connector on X2 with the use of a PoE „Power over Ethernet“ power supply according to IEEE802.3at\*, Class4 (30/25,5Watt). The DC supply can be achieved via the free pin's 4,5 and 7,8 (Midspan-Power). Also a “Phantom Powering” (Inline-Power) via the signal pin's 1,2,3, and 6 is possible. Depending on the cable cross-section the following cable distances can be used.

Table 7: Maximum cable length if PoE is used

cable cross-section (CAT5...7)	Maximum cable length for PoE
0,4mm	≈ 30m
0,6mm	≈ 70m

\* For detailed technical information regarding the 802.3at standard, please refer to the most recent edition of the corresponding IEEE specification.

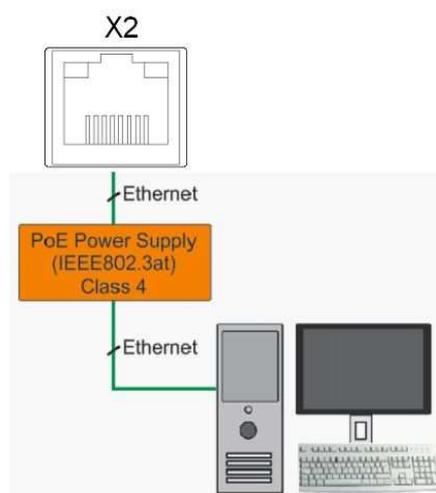


Fig. 5: LAN and PoE connection

① **NOTE:**

- **Take care if PoE is used the maximum reader output power of the reader must be limited to 1 W.**
- **It must be ensured that the reader is supplied with 42.5 V DC (48 V DC – cable losses) at least.**
- **This functionality is only available with the reader models ID ISC.LRU3500-EU and ID ISC.LRU3500-FCC.**
- **An operation of an ID ISC.LRU3500 via an external power supply and Power over Ethernet (PoE) at the same time is not recommended and can cause interferences during operation.**
- **If Power over Ethernet is used the USB Host is not available.**

## 4.3 Interfaces

### 4.3.1 Ethernet Interface on connector X2 (10/100Tbase)

The Reader has an integrated 10 / 100 base-T network port for an RJ-45. Connection is made on X2 and has an automatic "Crossover Detection" according to the 100BASE-T Standard.

With structured cabling CAT 5 cables should be used. This ensures a reliable operation at 10 Mbps or 100 Mbps.

The prerequisite for using TCP/IP protocol is that each device has a unique address on the network. All Readers have a factory set IP address.

Table 8: Standard factory configuration of the Ethernet connection

Network	Address
IP-Adress	192.168.10.10
Subnet-Mask	255.255.0.0
Port	10001
DHCP	OFF

**NOTE:**

*The reader is equipped with a DHCP ready Ethernet Interface.*

### 4.3.2 USB Interface on connector X3 (Host Kommunikation)

The USB socket on the board is terminal X3. The pinout is standardized. The data rate is reduced to 12 Mbit (USB full speed). A standard USB-cable can be used.




Fig. 6: USB-Interface for host communication

**NOTE:**

*The length of the USB-cable can have a max. of 5m (20 inch). It is not allowed to use longer cables.*

### 4.3.3 USB Host Interface on connector X4

The USB-Port X4 can be used for a standard USB Flash drive.




Fig. 7: USB-Host Interface

**NOTE:**

**USB Host shall not be used when the reader is powered via Power over Ethernet (PoE)**

### 4.3.4 RS232 Interface on connector X6

The RS232 interface is connected on X6. The transmission parameters can be configured by means of software protocol.

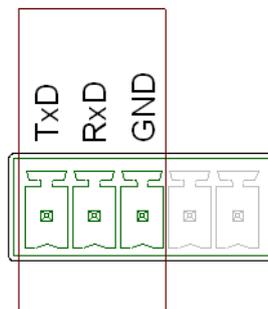


Fig. 8: RS232 interface pin-outs on X6

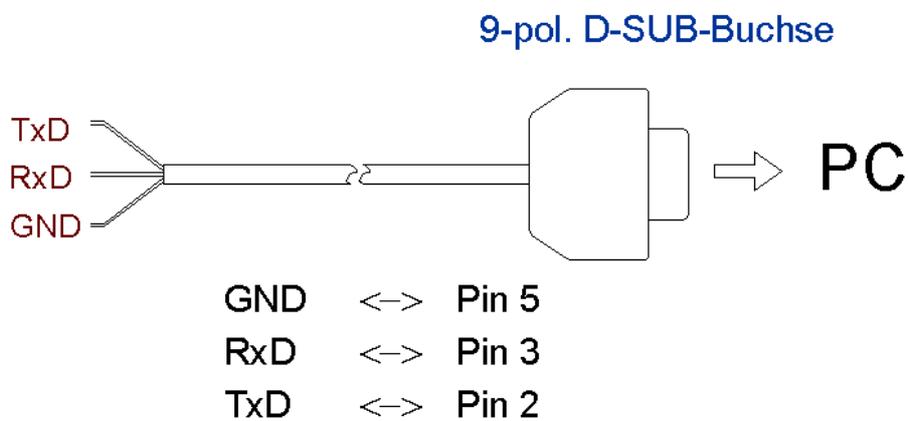


Fig. 9: Wiring example for connecting the RS232 interface X6

#### 4.3.5 RS485 Interface on connector X6

The connection of the RS485 interface take place via the X6 connector as well. The interface parameter can be configured via software protocols..

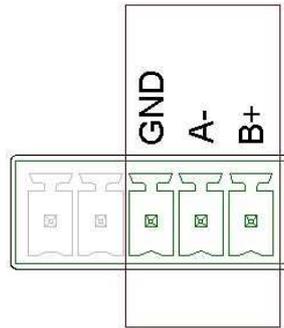


Fig. 10: RS485 interface pin-outs on X6 (RS485-Interface)

Table 9: RS485 interface pin-outs

Abbreviation	Description
GND	RS485 – GND
A-	RS485 – (A -)
B+	RS485 – (B +)

#### 4.3.5.1 Address assignment of RS485 for bus operation

For bus operation the Reader can be assigned the required bus address via software.

The address is assigned by the host computer. The software is used to assign addresses "0" through "254" to the Reader.

A potential termination of the interface bus can be configured by the software as well.

#### ① NOTE:

**Since all Readers are factory set with address „0“, they must be connected and configured one after the other.**

#### 4.3.6 Data-Clock Interface on connector X5 for Scan Mode only

The connection of the data-clock interface take place via the digital Outputs OUT1 and OUT2 at connector X5. The wire for the clock needs to be connected to connector OUT1-C, the wire for the data needs to be connected to connector OUT2-C.

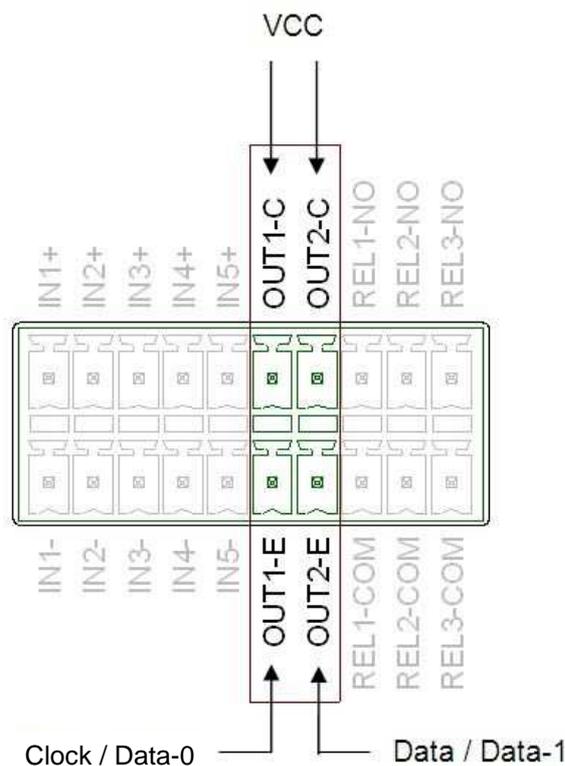


Fig. 11: Data-Clock Interface on connector X5

#### ① NOTE:

- For an easy installation with best signal quality we recommend the use of the ID ISC.LR.WS-A Wiegand Switch (4955.000.00).
- The data-clock interface is only available in Scan-Mode.
- The data-clock interface cannot be used to configure the reader.

- *The digital outputs OUT1 and OUT2 are not available, if the data-clock interface is activated.*
- *The data as well as the clock need to be supplied with an external voltage. The output is configured for max. 24 V DC / 30 mA.*

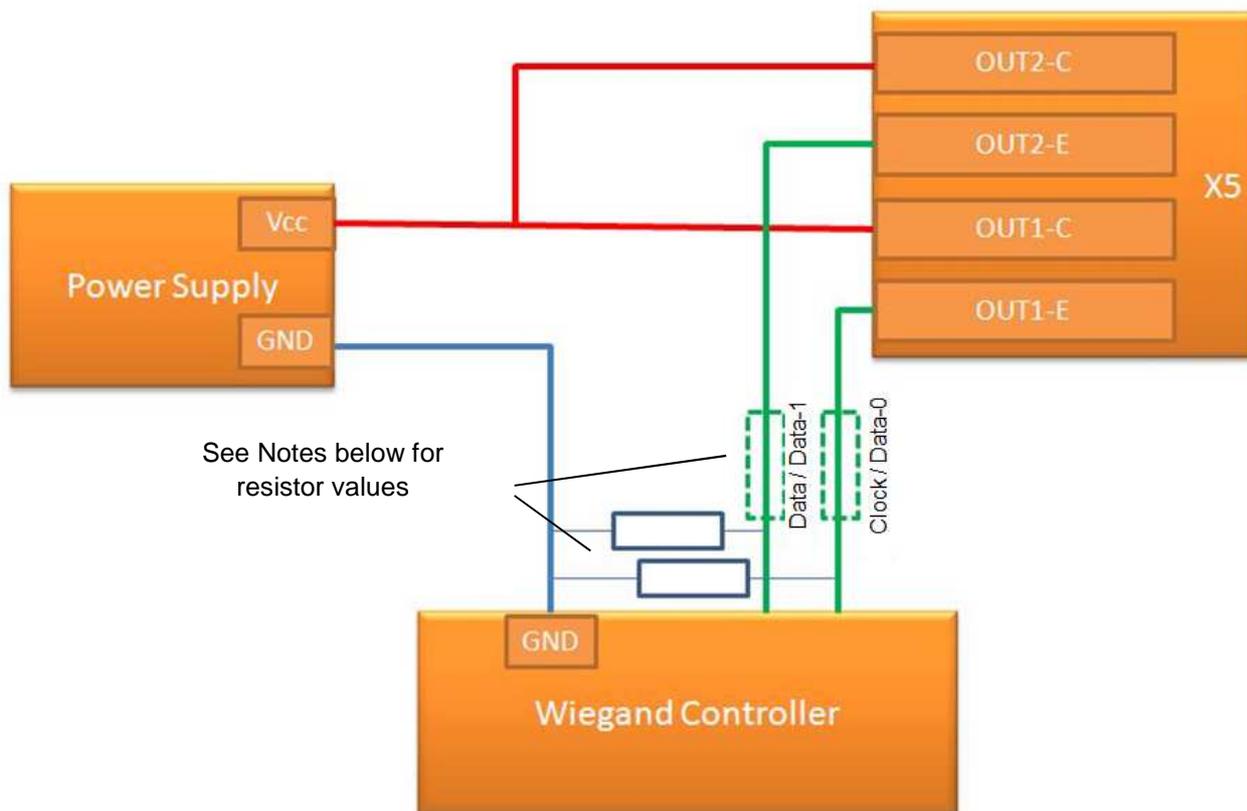


Fig. 12: Wiring Example

① **NOTE:**

- *Please consider possible limitations of the Wiegand Controller regarding the used supply voltage.*
- *In dependency on the inner circuit of the used Wiegand Controller it is necessary to use external serial resistors to limit the current on the data and clock wires.*
- *The necessity of the external pull down resistor is depending on the inner circuit of the used Wiegand Controller*

### 4.4 Digital Inputs on connector X5

The optocouplers on Terminal X5 are galvanically isolated from the Reader electronics and must therefore be externally supplied.

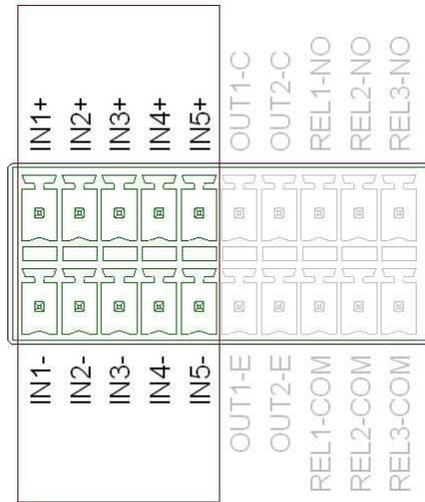


Fig. 13: Optocoupler pin-outs IN1 – IN5

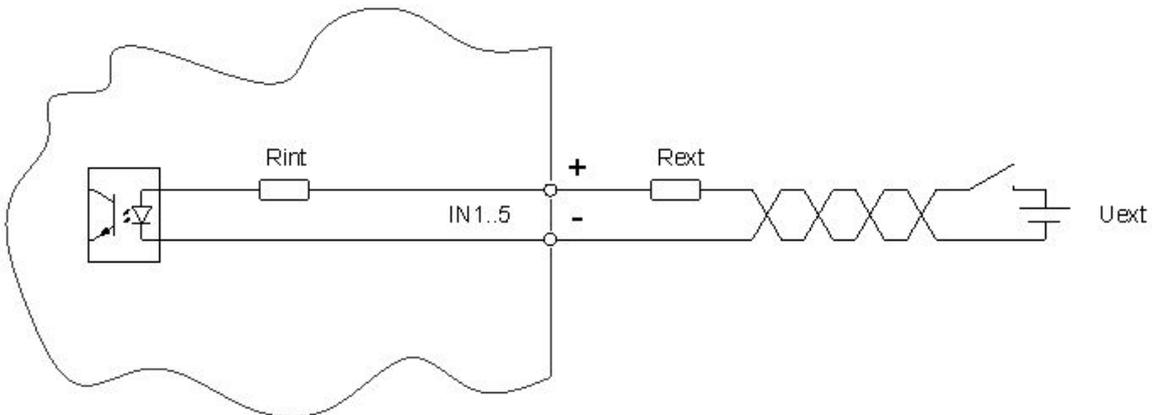


Fig. 14: Internal and possible external wiring of the optocoupler inputs

Optocoupler input (X5 / IN1-5):

The input LED associated with the optocoupler is connected internally to a series resistor of 500 Ω. For supply voltages of greater than 10V the input current must be limited to max. 20 mA by means of an additional series resistor (see Table 11)

Table 10:

Shows the necessary external resistors for various external voltages  $U_{\text{ext}}$

External voltage $U_{\text{ext}}$	Required external series resistor $R_{\text{ext}}$
5 V ... 10 V	---
11 V ... 15 V	270 $\Omega$
16 V ... 20 V	560 $\Omega$
21 V ... 24 V	820 $\Omega$

① **NOTE:**

- *The input is configured for a maximum input voltage of 5-10 V DC and an input current of max. 20 mA.*
- *Polarity reversal or overload on the input will destroy it.*

## 4.5 Outputs on connector X5

### 4.5.1 Digital outputs on connector X5

Optocoupler output (X5/1-2):

The transistor connections, collector and emitter, of the optocoupler output are galvanically isolated from the Reader electronics and are carried to the outside without any internal ancillary circuitry on Terminal X5. The output must therefore be powered by an external power supply.

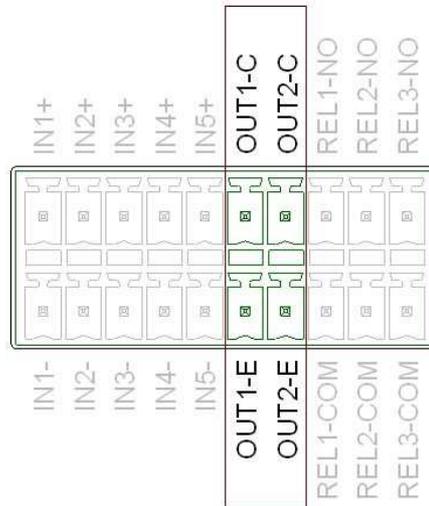


Fig. 15: Optocoupler -Outputs OUT1-2

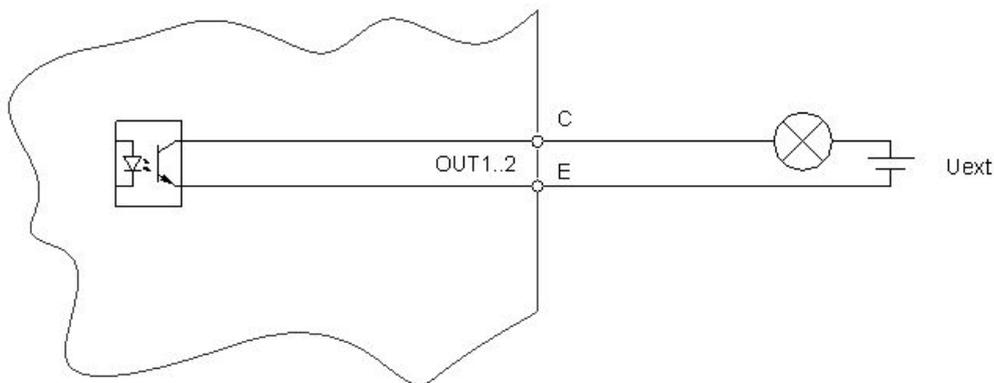


Fig. 16: Internal and external wiring of the optocoupler-outputs OUT1-2

#### ⚠ CAUTION:

- *The output is configured for max. 24 V DC / 30 mA.*
- *Polarity reversal or overload on the output will destroy it.*
- *The output is intended for switching resistive loads only.*

#### 4.5.2 Relay outputs on connector X5

There are 3 relay outputs available on connector X5.

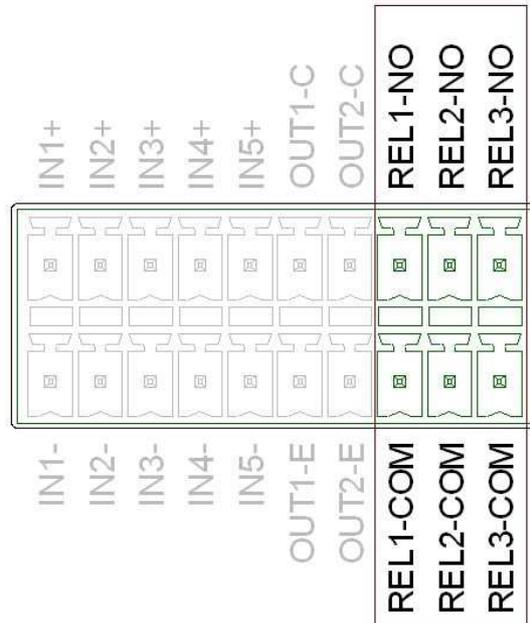


Fig. 17: Relay output pin-outs REL1-3

#### ⚠ CAUTION:

- The relay output is configured for max. 24 V DC / 2 A constant load.
- The switching current must not exceed 1A.
- The relay output is intended for switching resistive loads only. If an inductive load is connected, the relay contacts must be protected by means of an external protection circuit.


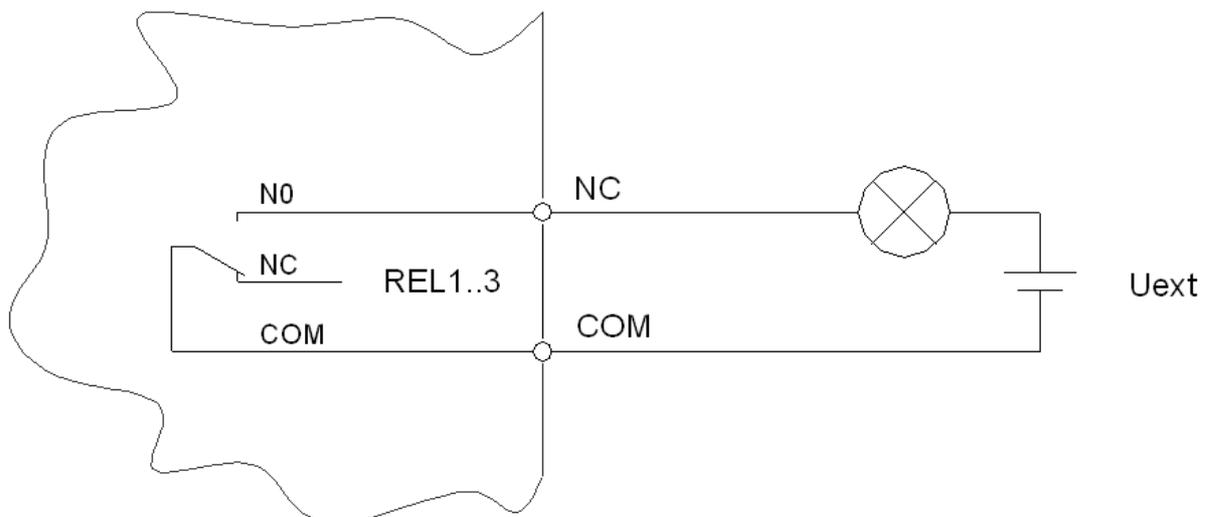


Fig. 18: Internal and external wiring of the relay output

## 5 Operating and Display Elements

### 5.1 Status LEDs

Table 11 Shows the possible status of the LEDs:

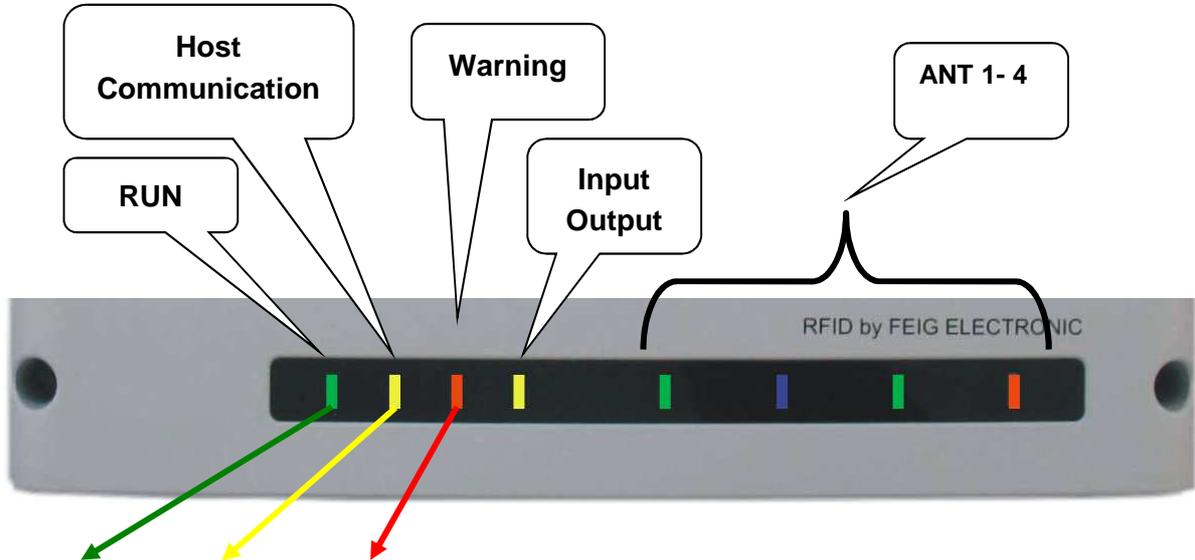

Green	Yellow	Red	Description
ON	OFF	ON	Boot sequence (ca.10s) after power on
FLASH	OFF	OFF	Normal Reader operation (without Host communication)
FLASH	FLASH	OFF	Reader receives a valid protocol from host
FLASH	OFF	ON	RF Warning [0x84] (without host communication)
FLASH (alternating)	OFF	FLASH (alternating)	Firmware Activation necessary [0x17] / Wrong Firmware [0x18]
FLASH (synchronous)	OFF	FLASH (synchronous)	RFC Hardware Error [0xF1]
OFF	FLASH (synchronous)	FLASH (synchronous)	Hardware Warning (ACC EEPROM Error / RFC not detected)
FLASH	OFF	FLASH (fast)	USB Host Error
<b>Firmware Update:</b>			
FLASH (light in sequence)	FLASH	FLASH	Firmware transfer from host to reader (Please do not switch off the reader or disconnect the interface cable)
FLASH synchronous	FLASH	FLASH	Firmware flash into EEPROM. (Please do not switch off the reader or disconnect the interface cable)

Green	Yellow	Red	Description
<b>Configurations-Reset:</b>			
FLASH	FLASH	FLASH	While T1 is pushed and hold for at least 5s
(light in sequence)			
ON	ON	ON	After T1 has been pushed and hold for 5s. Configuration Reset has been finished.

<b>Input / Output LED (yellow):</b>	
Configurable LED.	Can display the status of a digital input or output

<b>ANT 1 – 4:</b>	
Green	HF Power switched on
Blue	Tag-Detect
Red	Antenna impedance error (> 50Ohm or <50Ohm)

## 5.2 Reset Push Buttons

Figure 19 shows the position of the reset push button's T1 and T2.

At the right side of the connector X6 the push button T2 is positioned. With this push button a CPU-Reset can be performed. With the push button T1 within the reader housing on left side of X3 a complete configuration reset can be performed. For performing a reset you should use a paper clip and push the button T1 for at least 5 s until the 3 status LED's (left side) are switched on continuously, see [Status LEDs](#).

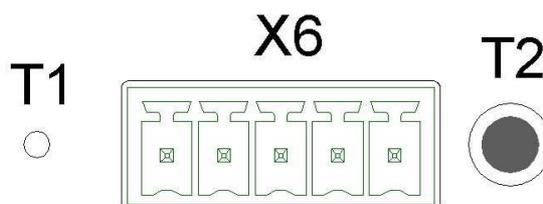


Fig. 19: Position of the reset-switches T1 and T2

**IDENTIFICATION****5.3 Reader Power adjustment**

To achieve the optimum reading performance it is necessary to set the reader output power to the highest allowed value. This depends on the used reader type (EU / FCC) and the regulation in the country where the reader is used.

**5.3.1 EU-Reader according to EN302 208**

According to the standard EN302 208 the maximum radiated power is 2 W e.r.p. (Effective Radiated Power) in countries of the European Union. The in the reader configured output power  $P_{out}$  depends on the antenna gain in dBi and the attenuation of the antenna cable. If a circular polarized antenna is used the antenna gain [dBic] can be reduced by 3dB. At a linear polarized antenna the maximum linear antenna gain [dBi] must be used.

$$P_{Out} = P_{erp} - \text{Antenna Gain} + \text{Cable loss} + 2,1\text{dB}^{**}$$

\*\* Correction Factor to convert the radiated power from e.r.p to e.i.r.p.

For the calculation of the reader output power  $P_{out}$  an Excel file „Calc-RF-Power.xls“ can be used. Available from Feig Electronic GmbH.

Example:

Radiated Power		2,0 W [e.r.p]	<>	33,0 dBm
correction factor ERP-> EIRP	*	1,64	+	2,1 dB
Radiated Power Isotrop	=	3,28 W [e.i.r.p]	=	35,1 dBm
Antenna Gain		11,0 dBic	-	11,0 dBi
Typ of antenna **		1	3	+ 3,0 dB
cable losses / 100m		30,7 dB		
cable losses / 1m		0,3 dB		
Length of the antenna cable	*	6 m		
	=	1,8 dB	+	1,8 dB
<b>Radiated power in dB</b>				<b>29,0 dBm</b>
<b>Output power in mW</b>				<b>786 mW</b>
<b>Configuration in the Reader (CFG3)</b>			<=	<b>0,8 W</b>

\*\* linear antenna = „0“, circular antenna = „1“

Fig. 20: Calculation of the output power

In Figure 20 the allowed antenna power is shown for the use of the FEIG standard antenna ANT.U600/270 – EU and a 6m long Belden H155 coaxial cable.

According to the FCC approval, Title 47, Part15 the maximum output power of the reader is limited to 1 W (30dBm). The maximum radiated power of the antenna should not increase more than 4 W e.i.r.p. Due to these facts two different cases have to be considered:

**IDENTIFICATION**

If a linear polarized antenna is used which gain is less than 6 dBi (factor 4), or if a circular polarized antenna is used which gain is less than 9dBic the reader can always be configured to an output power of 1W.

$$\text{Antenna Gain} < 6\text{dBi} \rightarrow P_{\text{out}} = 1 \text{ W}$$

This would be the case if the FEIG standard antennas ANT.U170/170 -FCC (4dBic) or ANT.U270/270 -FCC (8,7dBic) are used.

If an antenna is used which gain is more than 6dBi (9dBic) it is necessary to consider the antenna gain and the attenuation of the antenna cable to calculate the right output power. If a circular polarized antenna is used the antenna gain [G]=dBic can be reduced by 3dB. This is the case if the FEIG standard antenna ANT.U600/270 -FCC is used. In this configuration the maximum output power of the reader can be calculated in the following way.

$$P_{\text{out}} = 36 \text{ dBm (4 W e.i.r.p)} - \text{Antenna Gain (in dBi)} + \text{Cable Loss (in dB)}$$

$$P_{\text{out}} = 36 \text{ dBm (4 W e.i.r.p)} - \text{Antenna Gain (in dBic)} - 3 \text{ dB} + \text{Cable Loss (in dB)}$$

The antenna gain of the circular polarized standard antenna ANT.U600/270 is 10,5 dBic. This could be compared with a gain of 7,5 dBi of a linear polarized antenna (10,5 dBic – 3 dB).

Example 1:

Antenna ANT.U600/270 and 2 m Belden H155 Coaxial Cable:

$$P_{\text{out}} = 36 \text{ dBm} - 10,5 \text{ dBic} + 3 \text{ dB} + 0,6 \text{ dB}$$

$$P_{\text{out}} = 36 \text{ dBm} - 7,5 \text{ dBi} + 0,6 \text{ dB}$$

$$P_{\text{out}} = 29,1 \text{ dBm}$$

$$\text{Reader Configuration} = 0,8 \text{ Watt}$$

Example 2:

Antenna ANT.U600/270 and 6m Belden H155 Coaxial Cable:

$$P_{\text{out}} = 36 \text{ dBm} - 10,5 \text{ dBic} + 3 \text{ dB} + 1,8 \text{ dB}$$

$$P_{\text{out}} = 36 \text{ dBm} - 7,5 \text{ dBi} + 1,8 \text{ dB}$$

$$P_{\text{out}} = 30,3 \text{ dBm}$$

$$\text{Reader Configuration} = 1,0 \text{ Watt}$$

According to Example 2 it will only be necessary to adapt the output power of the reader when the antenna ANT.U600/270 is used if the length of the antenna cable is less than 6m.

## 6 Technical Data

### MECHANICAL DATA

---

Housing	Aluminum powder-coated
Dimension (W x H x D)	259,8 mm x 157,3 mm x 68 mm 10.23 inch x 6.19 inch x 2.68 inch
Weight	2,0 kg (4.4 lb)
Protection Class	IP 53 (with protection cap IP64)
Colour	RAL 9003 (Signal White)

### ELECTRICAL DATA

---

#### Power Supply

- ID ISC.LRU3000 24 V DC  $\pm$  5 % (Noise Ripple: max. 150 mV)
- ID ISC.LRU3500 24 V DC  $\pm$  5 % (Noise Ripple: max. 150 mV)  
or Power over Ethernet (min. 42,5 V DC)

Power Consumption max. 35 W

#### Operating Frequency

- EU-Reader 865 MHz to 868 MHz (EN 302208)
- FCC-Reader 902 MHz to 928 MHz (FCC47 Part15)

#### RF-Power

- ID ISC.LRU3000 300 mW to max. 2 W configurable
- ID ISC.LRU3500 300 mW to max. 4 W configurable  
max. 1 W if powered via Power over Ethernet

#### Antenna Connection

- ID ISC.LRU3000 4 x SMA female (50  $\Omega$ ), internal Multiplexer
- ID ISC.LRU3500 4 x SMA female (50  $\Omega$ ), internal Multiplexer, optional  
a DC voltage of 24 V DC  $\overline{\text{---}}$  / 500 mA can be  
activated at the antenna output

## Outputs

- 2 x Optocoupler 24 V DC  $\overline{\text{---}}$  / 30 mA (galvanically isolated)
- 3 x Relay (1 x normal open) 24 V DC  $\overline{\text{---}}$  / 1 A (switching current), (2A constant load)

## Inputs

5 x Optocoupler max. 5-10 V DC  $\overline{\text{---}}$  / 20 mA

## Interfaces

RS232, RS485, USB (full Speed), Ethernet, USB Host, Data-Clock

## FUNCTIONAL PROPERTIES

Protocol Modes	FEIG ISO HOST Mode (Advanced Protocol Frame)  Buffered Read Mode Scan Mode Notification Mode
Supported Transponder Types	EPC Class 1 Generation 2 ISO 18000-6-C (Upgrade Code required) further transponder types possible on demand
Optical Indicators	8 LEDs for operating status and diagnostics
Operating System	Linux (64 MB RAM, 256 MB Flash)
Further Features	Anticollision RSSI Real Time Clock RF-Channel monitoring Antenna SWR monitoring Temperature Monitoring*

## AMBIENT CONDITIONS

## Temperature Range

Operation	-25 °C to +55 °C
Storage	-25 °C to +50 °C (only LRU3500 with PoE)
Humidity	-25 °C to +85 °C
	5 % to 95 % non-condensing

\* Caution: Overheating of the device may result in performance losses. It is recommended to activate the RF of the reader only if there is a transponder in the detection range of an antenna.

Vibration	EN 60068-2-6 10 Hz to 150 Hz: 0,075 mm / 1 g
Shock	EN 60068-2-27 Acceleration 30 g

## APPLICABLE STANDARDS

---

### Radio Regulation

- |          |                     |
|----------|---------------------|
| • Europe | EN 302 208          |
| • USA    | FCC 47 CFR Part 15  |
| • Canada | IC RSS-Gen, RSS-247 |

EMC	EN 301 489
-----	------------

### Safety

Low Voltage	EN 62368-1
Human Exposure	EN 50364

## 7 Radio Approval

### 7.1 Europe (CE)

Hereby, FEIG ELECTRONIC GmbH declares  
that the radio equipment type ID ISC.LRU3000/3500 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

<https://www.feig.de/en/service/eu-declarations-of-conformity/>



## 7.2 USA (FCC) and Canada (IC)

### 7.2.1 USA (FCC) and Canada (IC) warning notices

<b>Product name:</b>	<b>ID ISC.LRU3000-FCC ID ISC.LRU3500-FCC</b>
<b>Reader name:</b>	<b>ID ISC.LRU3000-FCC ID ISC.LRU3500-FCC</b>
<b>FCC ID: IC:</b>	<b>PJMLRU3000A 6633A-LRU3000A</b>
<b>Notice for USA and Canada</b>	<p>This device complies with Part 15 of the FCC Rules and with RSS-247 of Industry Canada.</p> <p>Operation is subject to the following two conditions.</p> <p>(1) this device may not cause harmful interference, and</p> <p>(2) this device must accept any interference received, including interference that may cause undesired operation.</p> <p>Unauthorized modifications may void the authority granted under Federal communications Commission Rules permitting the operation of this device.</p> <p>This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.</p> <p>Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :</p> <p>(1) l'appareil ne doit pas produire de brouillage, et</p> <p>(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.</p>

① **NOTE:**

**Changes or modification made to this equipment not expressly approved by FEIG ELECTRONIC GmbH may void the FCC authorization to operate this equipment.**

### 7.2.2 Label Information

The following information must be placed at the outer side of the housing in which the reader is mounted.

**Contains FCC ID PJMLRU3000A**  
**Contains IC: 6633A-LRU3000A**

### 7.2.3 Installation with FCC / IC Approval

FCC-/IC-NOTICE: To comply with FCC Part 15 Rules in the United States / with IC Radio Standards in Canada, the system must be professionally installed to ensure compliance with the Part 15 certification / IC certification. It is the responsibility of the operator and professional installer to ensure that only certified systems are deployed in the United States / Canada.

### 7.2.4 USA (FCC) and Canada (IC) approved antennas

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with maximum permission gain and required antenna impedance for each antenna type indicated. Antenna types, not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

The antennas used for this transmitter must be installed to provide a separation distance of at least 35 cm from all persons and must not be located or operating in conjunction with any other antenna or transmitter, except as listed for this product's certification.

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énoncé ci-dessus et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Les antennes utilisées pour cet émetteur doit être installé pour fournir une distance de séparation d'au moins 35 cm de toutes les personnes et ne doit pas être situé ou opérant en conjonction avec une autre antenne ou un autre émetteur, sauf dans les cas énumérés à la certification de ce produit.

Following antennas are approved by FCC according FCC Part 15 and IC Canada according RSS-247

Antenna Type	Permitted Cable Attenuation
ID ISC.ANT.U600/270-FCC (10.5 dBic)	Min. 5,0 m of cable type Belden H155 (0,3 dB/m) or min. 3,0 m of cable type RG58 (0,5 dB/m)
ID ISC.ANT.U270/270-FCC (9.0 dBic)	No requirements.
ID ANT.U580/290-FCC (11.0 dBic)	min. 6,0 m of cable type Belden H155 (0,3 dB/m)
ID ANT.U290/290-FCC (9.0 dBic)	min. 2,0 m of cable type Belden H155 (0,3 dB/m)
IS ISC.ANT.U170/170 (4.0 dBic)	No requirements.

Annex A: **Accessories**

Following optional accessories are available:

Order No.	Article	Description
3558.000.00	ID ISC.LR.CSC-IP64 Connector Sealing Cap	Plastic Sealing Cap for Reader Connectors with Steel Conduit Pipe Thread (PG) for ID ISC.LRU3x00 and ID ISC.LRU1002 
3831.000.00	ID ISC.LRU3x00-MS Mounting Rail Set	Mounting Rail Set for ID ISC.LRU3x00 and ID ISC.LRU1002
EU: 3198.000.00 FCC: 3685.000.00	ID ISC.ANT.U600/270 UHF Antenna	UHF Antenna for connection to UHF Reader, Connector: RG58 coax cable 10 cm, plug SMA – female, 3dB beamwidth 65° x 30°
EU: 3199.000.00 FCC: 3686.000.00	ID ISC.ANT.U270/270 UHF Antenna	UHF Antenna for connection to UHF Reader, Connector: SMA – female, 3dB beamwidth 65° x 65°
EU: 3200.000.00	ID ISC.ANT.U170/170 UHF Antenna	UHF Antenna for connection to UHF Reader, Connector: RG316/U coax cable 10 cm, plug SMA – female, 3dB beamwidth 85° x 85°
3308.000.00	ID ISC.ANT.U600/270-MS Mounting Set Antenna UHF	Mounting Set for UHF Antenna ID ISC.ANT.U600/270. Suitable for mounting on installation pipes with a diameter of up to 60 mm.
3309.000.00	ID ISC.ANT.U270/270-MS Mounting Set Antenna UHF	Mounting Set for UHF Antenna ID ISC.ANT.U270/270. Suitable for mounting on installation pipes with a diameter of up to 60 mm.
3310.000.00	ID ISC.ANT.U170/170-MS Mounting Set Antenna UHF	Mounting Set for UHF Antenna ID ISC.ANT.U170/170. Suitable for mounting on installation pipes with a diameter of up to 60 mm.
1654.002.00	ID ISC.ANT.C2-A UHF Antenna Cable 2m	H155 Coax Cable for UHF Reader, Connection Plug SMA - male/male, Length: approx. 2 m
1654.003.00	ID ISC.ANT.C6-A UHF Antenna Cable 6m	H155 Coax Cable for UHF Reader, Connection Plug SMA - male/male, Length: approx. 6 m
2557.000.00	ID NET.24V-B Power Supply Unit	Power Supply Unit for ID ISC.LR/LRM2500/1002, ID ISC.LRU/LRU3x00/1002. Versatile outlets available (EU, GB, US - not included).
2558.000.00	ID CAB.NET.24V-B-EU Cable with European Plug	Cable with Continental European Plug for Power Supply Unit ID NET.24V-B
2559.000.00	ID CAB.NET.24V-B-GB Cable with GB/UK Plug	Cable with GB Plug for Power Supply Unit ID NET.24V-B
2560.000.00	ID CAB.NET.24V-B-US Cable with US Plug	Cable with US Plug for Power Supply Unit ID NET.24V-B
4104.000.00	ID CPR.USB/OTG USB Stick + On-The-Go Adapter Cable	4 GB USB Flash Drive incl. USB On-The-Go Adapter Cable