

- 1. ALL RESISTORS ARE 1/2 WATTS ± 10%.
- 2. ALL CAPACITORS AT LEAST 600V, W.V.D.C.
- 3. FENDER P/N FOR CONTROLS INDICATED.
- 4. VOLUME, BASS, AND TREBLE CONTROLS ARE FENDER P/N 021851 VALUE 250K-J.
- 5. TYPICAL 600HZ SIGNAL REQUIRED FOR 10 WATTS OUTPUT AND FOR SUPPLYING 280 MV TO REVERB UNITS INPUT COIL.
- 6. DENOTES REVERB DRIVER SIGNAL, EXCLUSIVELY.
- 7. PART NO. 010870 USED IN SOME VERSIONS.
- 8. WITH ALL CONTROLS SET AT MAXIMUM, DENOTES C.


FENDER MUSICAL INSTRUMENTS  
 A DIVISION OF COLUMBIA BROADCASTING SYSTEMS INC.  
 FULLERTON, CALIFORNIA  
 U.S.A.

FENDER P/N	OR EXPORT MODEL
022764	1R-123P34A3
022756	1R-123P34A
022692	1R2-125C1A
022898	1R3-125A29A
022921	1R4-125A20A

Old style  
 - SCHEMATIC -  
 100 WATTS RMS PUBLIC  
 ADDRESS AMP TUBE TYPE

PA100

NOTE: GROUND SWITCH, U.L. 0.47 600V DELETED.

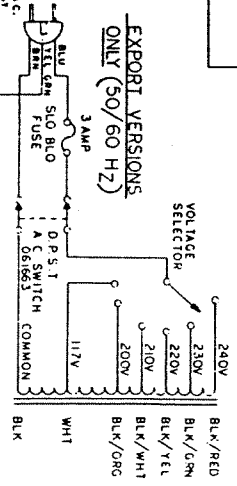

OUTPUT  
 100 WATTS RMS  
 TOTAL LOAD  
 IMPEDANCE  
 4 OHMS