



Akko

3068 **B** 三模
Multi-modes

用户手册

User Manual

目录

3068B规格参数	1
3068B组合键功能	2
3068B系统功能(Windows)	3
3068B系统功能(Mac)	4
3068B背光调节	5
3068B蓝牙使用指南	6
3068B蓝牙使用步骤1	7
3068B蓝牙使用步骤2	8
按键 / 灯光自定义说明和调用说明	9
Akko售后服务规范	10

Menu

3068B Technical Specifications	11
3068B HotKeys	12
3068B System Commands (Windows)	13
3068B System Commands (Mac)	14
3068B Backlight Settings	15
3068B Bluetooth Feature Overview	16
3068B Bluetooth Setup Instruction 1	17
3068B Bluetooth Setup Instruction 2	18
Key/Lighting Effects Customization Instruction	19
Akko Warranty and Service Statement	20

3068B规格参数

1

尺寸

约316*107*39mm

重量

约0.64kg

产地

中国

类型

机械键盘

键帽

PBT材质

连接方式

蓝牙 / 无线 / 有线

连接线

Type-C To USB

电池容量

1800mAh

多媒体键

支持

全键无冲


支持

按键/灯光自定义

键盘需在有线模式下配合驱动进行自定义

3068B组合键功能

2

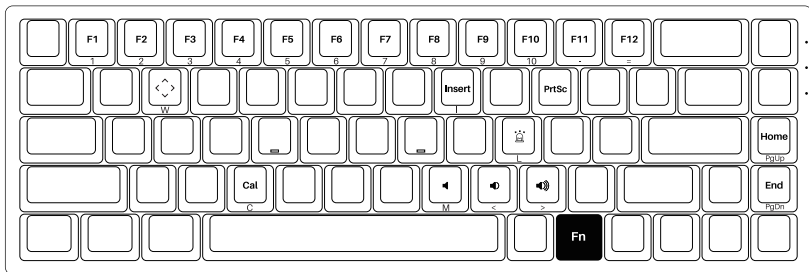


Fn+	1 - 0	=	F1 - F10
	-		F11
	=		F12
	PgUp		Home
	PgDn		End

Fn+	I	=	Insert
	P		Prtsc
	C		计算器
	M		静音
	<		音量减小

Fn+	>	=	音量增加
	W		将 W A S D 与 ↑ ↓ ← → 键对调

3068B系统功能(Windows)

3

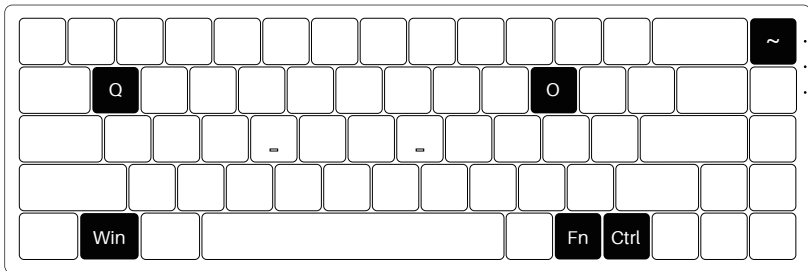

锁Win键

Fn + 左Win

恢复出厂设置

长按 Fn + ~ 3秒

将Ctrl变成Menu (App) 键

长按Fn + 右Ctrl 3秒

进入Windows系统


长按Fn + Q 3秒

进入Mac系统

长按Fn + O 3秒

3068B系统功能(Mac)

4

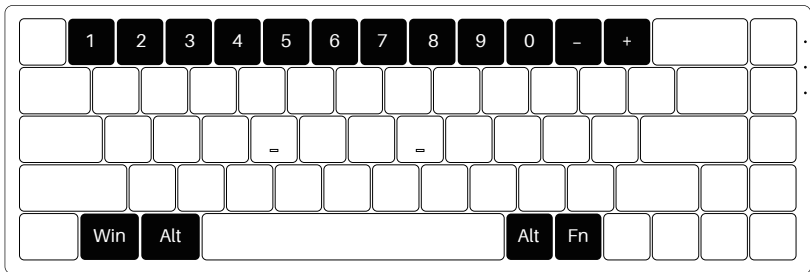


注: 以下功能通过Fn+对应键组合实现

1	降低显示屏亮度	5	F5	9	下一曲(音频)	右Alt	Command
2	增加显示屏亮度	6	F6	0	静音	左Win	Option
3	开放任务控制	7	上一曲(音频)	_	调低音量	左Alt	Command
4	呼出Siri	8	暂停/播放(音频)	+	调高音量		

3068B背光调节

5

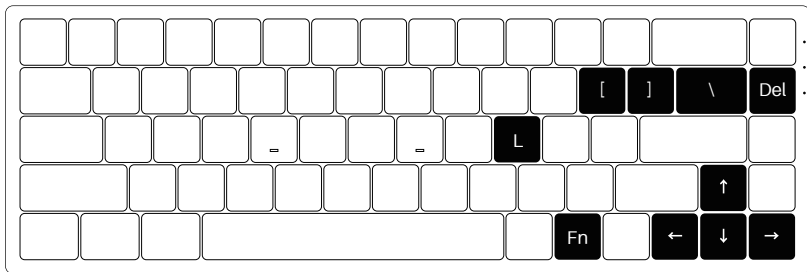


Caps Lock
电量指示
锁Win

Fn+	\	=	在所有灯效RGB彩光模式下， 调节灯光颜色致7色单色+RGB循环。
	Del		常亮\呼吸\霓虹\光波\涟漪\繁星点点 川流不息\如影随形\聚合\正弦波\彩泉涌动 百花争艳\一石二鸟\峰回路转\斜风细雨 雨滴\流星\踏雪无痕\极光\层出不穷 (20种灯光)
	L		灯光开启/关闭

Fn+	[	=	速度变慢
	]		速度变快
	“↑”		灯光变亮
	“↓”		灯光变暗
	“←”		灯光方向向左
	“→”		灯光方向向右

3068B蓝牙使用指南

6

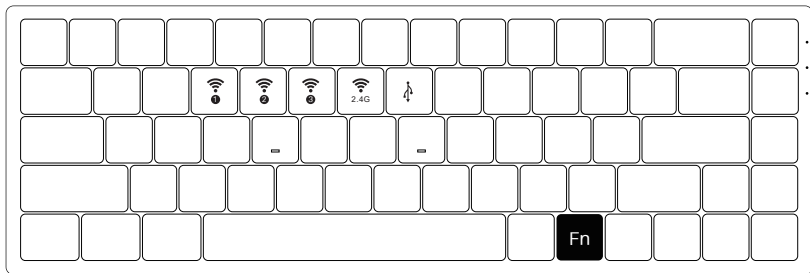

Fn+	E	=	蓝牙设备1	短按回连蓝灯慢闪; 长按配对蓝灯快闪
	R		蓝牙设备2	
	T		蓝牙设备3	短按回连绿灯慢闪; 完成匹配后恢复灯效
	Y		2.4G无线设备	
	U		有线模式	

3068B蓝牙使用步骤1

1.切换到蓝牙模式

- ① 键盘不插USB线未连接电脑使用的状态下,底部电源拨动开关拨动到ON,长按Fn + E / R / T可进行蓝牙匹配,E / R / T按键上蓝灯快闪,即可进入蓝牙匹配模式。
- ② 键盘插入USB线连接电脑使用的状态下,底部电源拨动开关不需拨动也可进蓝牙模式,直接长按Fn + E / R / T便可进行蓝牙匹配,E / R / T按键上蓝灯快闪,即可进入蓝牙匹配模式。

2.选择蓝牙设备记忆组

为便于记忆对应设备名称,本机蓝牙有5.0和3.0两组架构,蓝牙5.0为Akko 3068BT-1 / Akko 3068BT-2 / Akko 3068BT-3; 蓝牙3.0为AKK0 3068 BT3.0;您通过Fn + E / R / T,完成匹配设定后,系统会默认记忆您关闭蓝牙模式前最后一次连接的设备。

3.设备匹配

使用您的PC、PAD、手机等设备,开启蓝牙进行匹配,第一次匹配过程中您所使用的设备会搜索出AKK0 3068 BT3.0(蓝牙3.0) Akko 3068 - 1(蓝牙5.0)两组。请根据您的喜好选择键盘的蓝牙组。

(注:部分设备只能搜索到蓝牙5.0:)

4.设备切换

完成了3组蓝牙设备的匹配后,系统会自动记忆;通过短按Fn+E / Fn+R / Fn+T,可快速切换3个蓝牙设备使用。

5.设备关闭

键盘在不使用的时候,关闭背面开关电源,可节省电量;键盘空闲15分钟之后,进入休眠模式,可按任意键唤醒。注:使用Windows系统,开启省电模式会影响蓝牙设备的休眠唤醒时间。

6.设备匹配

如忘记设备,或者蓝牙连接出现混乱的情况,如需重新连接蓝牙设备时,需要删除电脑中原有的3068蓝牙设备记忆。

■ 按键 / 灯光自定义说明和调用说明

1. 键盘按键/灯光自定义需在有线模式下配合驱动进行。
2. 键盘有线模式下灯光可搭配驱动实现音乐律动。
3. 按键/灯光自定义及调用说明;请在我司官网下载“Akko Cloud”驱动。
4. 驱动下载地址www.akkogear.com

- 1.Akko机械键盘享受非人为损坏1年保修服务,即从购买日起,1年以内免费维修。
- 2.如超过条款1的保修期限,Akko官方将收取不超过市场平均价格的费用提供维修服务。
- 3.用户自行拆开键盘视为放弃免费维修服务,即使1年内损坏,也按照售后服务条款2执行。
- 4.不同销售平台的特殊服务条款,以购买平台规则为准。

注意 人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等,键盘为电子产品,请按照电子产品
事项 保护方式爱惜使用。

售后电话:0755-27728007

售后QQ:981572876

*官方售后服务时间为每周一至周五上午10:00至下午18:00,节假日以国家法定节假日休息为准。

*因受维修时间,物流时间,零件采购时间等不可控因素,售后时间会有不同,以实际损坏情况评估为准,请用户耐心等待。

3068B Technical Specifications

11

Dimensions

Approximately
306*197*39mm

Weight

Approximately
0.64kg

Country of Origin

China

Type

Mechanical Keyboard

Keycap

PBT Material

Connection

Bluetooth/USB/2.4Ghz

Interface

Type-C To USB

Battery Capacity

1800mAh

Multimedia Keys

YES

N-Key Rollover


YES

Key/Lighting Effects Customization

The keyboard can only be customized
with driver in wired mode

3068B HotKeys

12

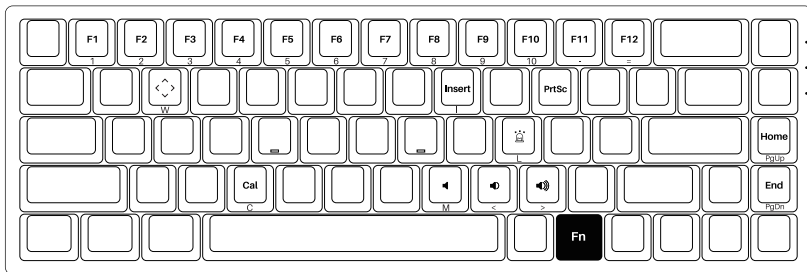


Fn+	1 - 0	=	F1 - F10
	-		F11
	=		F12
	PgUp		Home
	PgDn		End

Fn+	I	=	Insert
	P		Prtsc
	C		Calculator
	M		Mute
	<		Decrease Volume

Fn+	>	=	Increase Volume
	w		Swap W A S D with ↑ ↓ ← →

3068B System Commands(Windows)

13

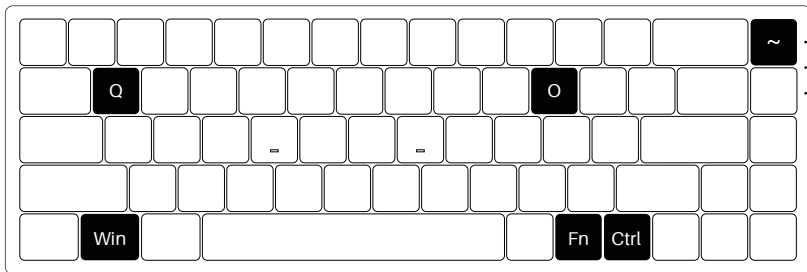

Lock Windows Key

Press Fn and left Win key

Restore Factory Settings

Hold down Fn and press ~ key for 3S

Revert Ctrl into Menu (APP) key

Hold down Fn and press right Ctrl for 3S

Enter Windows system


Hold down Fn and press Q key for 3S

Enter Mac system

Hold down Fn and press O key for 3S

3068B System Commands(Mac)

14

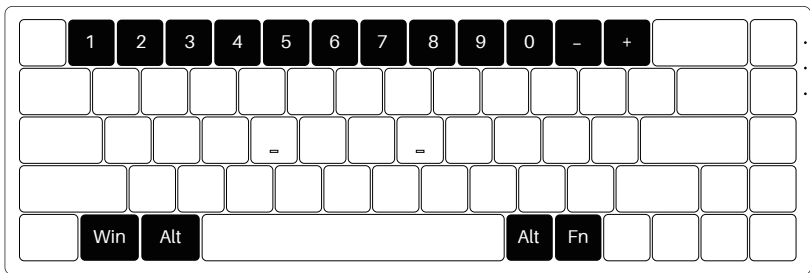


Note: The following features are realized by the combination of "Fn + corresponding key"

1	Decrease display brightness	5	F5	9	Skip forward (audio)	Right Alt	Command
2	Increases display brightness	6	F6	10	Mute	Left Win	Option
3	Open mission control	7	Skip back (Audio)	-	Volume down	Left Alt	Command
4	Activate Siri	8	Pause/Play (Audio)	+	Volume up		

3068B Backlight Settings

15

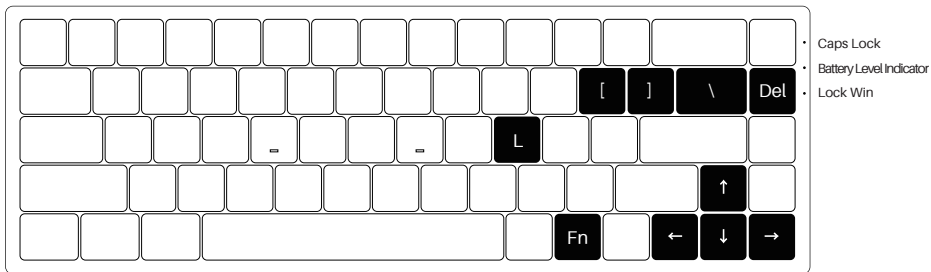


Fn+	\	=	In all lighting effects with RGB color mode, set the backlight color to 7 single color with RGB loop effect.
	Del		Constant \ Breath \ Neon \ Wave \ Ripple \ Star \ Effect A \ Effect B \ Effect C \ Effect D \ Effect E \ Effect F \ Effect G \ Effect H \ Effect I \ Effect J \ Effect K \ Effect L \ Effect M \ Effect N (20 Lighting Effects)
	L		Light On / Off

Fn+	[	=	Slower Animation
	]		Faster Animation
	“ ↑ ”		Bright
	“ ↓ ”		Dim
	“ ← ”		Set animation direction to left
	“ → ”		Set animation direction to Right

3068B Bluetooth Feature Overview

16

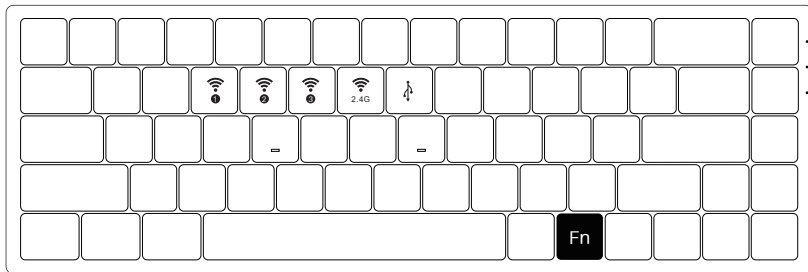

Fn+	E	=	Bluetooth device 1	Short press to connect with slow flashing blue LED; Press and hold to pair device with fast flashing blue LED.
	R		Bluetooth device 2	
	T		Bluetooth device 3	
	Y		2.4G wireless device	Short press to connect with slow flashing green LED; The lighting effect will be restored when pairing succeeds.
	U		Wired mode	

1.Switch to Bluetooth mode

- ① When the keyboard remains unplugged, turn the back switch to ON. Then long press and hold Fn + E / R / T to start pairing with Bluetooth devices. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.
- ② When the Keyboard is plugged into the computer through USB interface, it will enter Bluetooth mode automatically without having to push the switch on the back. Users can directly long press and hold Fn + E / R / T to enable Bluetooth pairing. The keyboard will enter Bluetooth pairing mode when the blue LEDs under E / R / T keys flash quickly.

2.Set the Bluetooth profile

To help user recognize individual Bluetooth device, the keyboard is equipped with both Bluetooth 5.0 and 3.0 frameworks. The device name under the Bluetooth 5.0 framework is Akko 3068BT-1 / Akko 3068BT-2 / Akko 3068BT-3 while the device name under Bluetooth 3.0 is AKK0 3068 BT3.0. Once the devices are paired through Fn + E/R/T, the system will by default memorize the last connected device before you turn off the Bluetooth mode.

3. Bluetooth Pairing

The keyboard can be paired with PC, Pad, smartphone and other devices with Bluetooth turned on. When you first try to search Bluetooth devices, two groups of device names shall appear with Akko 3098 BT3.0 (Bluetooth 3.0) and Akko 3098-1 (Bluetooth 5.0). Select a Bluetooth group based on your preferences (Note: some devices can only search for the Bluetooth 5.0 group).

4. Switch the Bluetooth device

After 4 Bluetooth devices have been paired with the keyboard, press Fn+E / Fn+R / Fn+T / Fn+Y for at least 3 seconds to quickly switch between them.

5. Shut off the keyboard

Turn the power off on the keyboard back panel while unused for power saving;

If the keyboard remains unused for over 10 mins, it would go to sleep mode and you can activate it by pressing any key.

Note: The battery saver mode for Windows system would affect/delay the sleep activation time of the keyboard.

6. Reset the keyboard

If you forgot the specific paired front-end device or if there remains disorder in Bluetooth connection and communication, you'll need to clear the computer's Bluetooth cache by removing the 3068 keyboard from the list of connected device.

■ Key/Lighting Effects Customization Instruction

19

- 1.The key/lighting effects customization must be completed in wired mode with Akko driver.
2. In wired mode, the lighting effects can also achieve music rhythm effects with Akko driver.
3. Please download the Akko Cloud driver on our website.
4. Users can download the driver via en.akkogear.com

1. Akko provides 1-yr warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Disassembling the keyboard without manufacturer/seller's instruction will immediately void the warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.



扫描关注官方微信



扫描关注官方微博



[instagram.com/akkogear](https://www.instagram.com/akkogear)



[facebook.com/akkogear](https://www.facebook.com/akkogear)