

PRELIMINARY

FUJITSU Component Connector QSFP28 Active Optical Cable

QSFP28 Active Optical Cable that is able to transmit 100Gbps (25Gbps x 4ch)

100Gbps high speed transmission

25Gbps x 4 channels optical transceiver conforms to QSFP28 MSA
 It also conforms to transmission speed of InfiniBand™ EDR certified in April 2015, Plugfest compliant cable, and 100 Gigabit Ethernet (100GBASE-SR4)

Next-generation High-speed Optical Engine Structure *

New Optical engine structure with Flexible printed circuit (FPC) with polymer optical wave guide, and improved optical coupling with lens structure

Over drive technology*

New technology that makes it possible to drive 25Gbps signals with 14Gbps VCSELS realized reliable and low cost solution

* Developed by FUJITSU LABORATORIES LTD

RoHS Compliant



■ Applications

HPCs, Servers, HCAs, Switches, Storage, etc.

■ Specifications

Item	Specifications
Data rate	25.78125Gbps x 4 lanes
BER	10 ⁻¹² (PRBS-31)
Power supply	3.3 V
Operating temperature	0 to +70 deg. C (Case temperature)
Link reach	100m
Power consumption	2.5W
Wave length	840 to 860nm
Size	72.4 (L) x 19 (W) x 13.5 (H) mm

■ Schedule

Customer samples: May 2017
 Mass production: July 2017



■ Part numbers

Item	Part number
For Infiniband EDR	FPD-204R008-xx
For 100G Ethernet SR4	FPD-205R008-xx

xx: cable length (m): 05, 10, 15, 20, 30, 50, A0 (100)

■ Reference – Optical Engine Structure




- Bare chips mounting onto the FPC by flip-chip bonding
- Lens sheet by imprinting technology
- Optical polymer wave guide
- Passive mounting for the lens film and the polymer wave guide

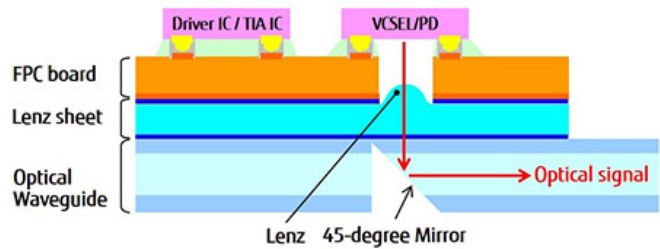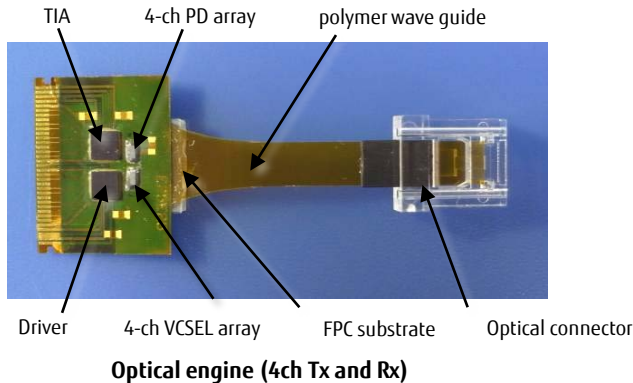





■ Reference – Over Drive Technology

- Enables 25Gbps operation with 14Gbps VCSEL by 3-tap finite impulse response (FTR) pre-emphasis implemented VCSEL driver

Without pre-emphasis



With pre-emphasis

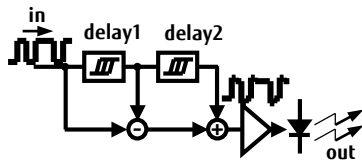

Cautions

- Always carefully read and understand the product manual and/or delivery specifications for proper operation and handling before actual use.
- Use only at the specified rated supply voltage.
- Never install the products in a wet, highly humid, dusty, oily or smoky environment.
- The products in this document are designed for general use. They are not for use in equipment that poses high fatal risks or danger and not for use requiring extremely high reliability such equipment in nuclear facilities, medical life support systems, etc.

Contact

FUJITSU COMPONENTS AMERICA INC.

2290 North First Street, Suite 212, San Jose CA 95131 U.S.A.

Tel: (1-408) 745-4900 Fax: (1-408) 745-4970

Email: components@us.fujitsu.com

Copyright

InfiniBand is a registered trademark of the InfiniBand Trade Association. All trademarks or registered trademarks are the property of their respective owners. Fujitsu Component Limited or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Component Limited, or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2017 FUJITSU COMPONENT LIMITED All rights reserved. Revised March 2, 2017