

FUJITSU THERMAL PRINTER FP-510II




Fujitsu Thermal Printer, FP-510II, a Multi-Function printer, delivering further improved high throughput and extensive print functions for POS, Ticket, KIOSK and Label printing.

●High speed printing – further reduction in waiting time

- Clear and high speed printing at 300mm/sec
- Higher throughput ability, less waiting time

The original optimum design of Driver and Firmware achieves fast printout of the first page.

Comparison of throughput with other companies. (Time from the start of data transfer to the completion of print)

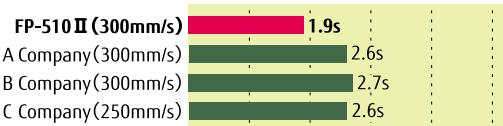

Print condition: Windows XP, USB interface, 150mm Receipt length with our test pattern

●16 Gray Scale function – produces vibrant images


16 Gray scale function outputs vibrant and clear images even with monochrome printing. High resolution image printing capability supports your branding strategy to print product images on coupons and receipt advertisement (available only with OPOS driver).



●Reduced printing – lower operation cost


Reduced print function for Windows driver and Top Margin reduction function lowers paper usage. Operating cost and environmental impact can be reduced.

■Reduce printing

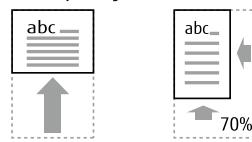

- 1/4 reduced vertically
- 1/2 reduced vertically
- 80 width paper → convert to 58mm

■Top Margin selectable 1.5 / 4.5 / 12mm



** remove receipt each time after printing in case of 1.5mm or 4.5mm margin setting

●High reliability mechanism – long and stable operation

- Head life 150km
- Cutter life 2 million cuts (Receipt paper)
- MCBF 70million lines

●Front Paper Ejection – User friendly paper handling

Compared to top paper ejection, front paper ejection enables smoother paper handling. Paper removal is faster, and it is suitable for continuous ticket and label printing.

FUJITSU FP-510II Specifications

Printing Technology		Direct Line Thermal Method						
Print Resolution		8 dot/mm (0.125mm/dot) 203dpi						
Printing Speed		Monochrome: Maximum 300mm/s(80ips) Two color: Maximum 115mm/s(30ips)						
Paper Feed-out Direction		Front feed out						
Cutter Method		Partial-cut cutter (Standard) Full-cut cutter, Programmable Partial-cut and Full-cut cutter (Factory option)						
Auto Cutter Position		12mm(Standard), Programmable 4.5mm or 1.5mm distance between cutter and top of form						
Paper	Paper width	83mm, 80mm, 60mm, 58mm,						
	Outer Diameter of Roll Paper	Up to ϕ 102mm (Paper thickness: 75~90 μ m) Up to ϕ 90mm (Paper thickness: 90~150 μ m)						
	Paper Thickness	75 μ (0.075mm) - 150 μ (0.150mm)						
Maximum Print Width	58mm width paper	48mm (384dots) or 52.5mm (420dots)						
	60mm width paper	54.5mm (436dots)						
	80mm width paper	64mm (512dots) or 72mm (576dots)						
	83mm width paper	80mm (640dots)						
Font size and Column		203dpi (Normal mode)			180dpi (Extended mode)			
		Font A (Column)	Font B (Column)	Font C (Column)	Font A (Column)	Font B (Column)		
		Paper width 58mm	Body Face	12x24 (32 or 35)	10x24 (38 or 42) 9x24 (42 or 46)	8x16 (48 or 52)		
			Letter Face	11x22 (32 or 35)	9x17 (38 or 42) 9x17 (42 or 46)	12x24 (32 or 35)		
		Paper width 60mm	Body Face	12x24 (36)	10x24(42), 9x24(48)	8x16(54)		
			Letter Face	11x22 (36)	9x17(42), 9x22(48)	12x24(36)		
		Paper width 80mm	Body Face	12x24 (42 or 48)	10x24 (51 or 57) 9x24 (56 or 64)	8x16 (64 or 72)		
			Letter Face	11x22 (42 or 48)	9x17 (51 or 57) 9x17 (56 or 64)	8x13 (64 or 72)		
		Paper width 83mm	Body Face	12x24(53)	10x24(64), 9x24(71)	8x16(80)		
			Letter Face	11x22(53)	9x17(64), 9x22(71)	12x24 (53)		
Character Sets		1byte	ANK(95 char.), International Character(48 char.), Enlarged Graphics(128 char. x 20 pages), Download Character(95 char.),					
		2bytes	JIS 1 & 2 Kanji(6879 char.) JISX0208-1990, User-Defined character(94char.), Special Characters(845 char.)					
Barcode	Barcode						UPCA, UPC-E, EAN13, EAN8, CODE39, ITF, CODABAR(NW-7), CODE93, CODE128	
Gray scale function		16scales (OPOS Driver only)						
Receive Buffer		Max. 4KB						
Logo Store Memory		3Mbits (Max. 384KB)						
Paper Near End & Paper End		Available						
Reflective (Black Mark) paper sensor		Factory option						
Internal Buzzer		One buzzer (Standard)						
Interface	Dual (RS232C+USB)		RS232C Serial (D-SUB 25pins) + USB(2.0 Full-speed, Type-B x 1port)					
	Powered USB		USB Full speed (FCL 5pins)					
	LAN		Wired, 10BASE-T/100BASE-TX (RJ-45 x 1port)					
Software Interface		ESC/POS emulation						
Drawer Interface		1 Drawer Controllable						
Software	Printer Driver	Windows	Windows driver	Windows Server® 2008 R2, Windows® 7, Windows Server® 2008,				
			OPOS driver (Ver.1.13)	Windows Vista®, Windows Server® 2003, Windows® XP, Windows® 2000				
	Linux	JavaPOS driver (Ver.1.10)	JavaPOS driver (Ver.1.10)	Windows Embedded for Point of Service (WEPOS)				
Printer Utility		Software to set the printer's setup items						
LAN Utility		Quick Setup PR-PortManager (Popup Status Monitor) Admin Manager (Printer Status Monitor, System Status Monitor, IP Address Setup)						
RELIABILITY		70million Lines *1						
MCBF (Mean-cycle-between-failure)		150km (Monochrome), 75km (Two color) *1						
Cutter Life		2 million times of partial cut (Recommended Normal paper use) *1						
Power Requirements		DC Input: +24VDC±10% AC Input: 100 - 240V, 50/60Hz, Single Phase						
Power Consumption		During standby: 4.5w/0.2A Average during operating : 44w/1.5A						
Operating condition		Temperature: 0°C to 40°C Print quality guarantee: 5°C to 35°C						
Humidity		10% ~ 95%RH (without condensation, Highest wet bulb temperature: 29°C or less)						
Storage condition		Temperature: -20°C to 60°C Humidity: 5% ~ 95%RH (without condensation)						
ESD resistance		Direct application Contact discharge: 0~8kV *2 Direct application Air discharge: 0~15kV *2 Indirect discharge: 0~15kV *2						
RoHS and FUJITSU Environment Assessment		Standard						
Dimensions		128(W)x207(D)x145(H)mm						
Weight (without the packing box)		Normal Model: 1.9kg						
Cover Color		Black & White						

*1 Operation condition is under 500 transactions/day(1transaction=25LF + 1cut), 340days/year, print duty less than 9%, and the life of Head or Cutter with using specified paper by our company. If unspecified paper is used, the life of printer might be shortened than expected. Also, it might cause trouble for the printer.


*2 Based on FUJITSU measurement and quality standards.

All specifications are subject to change without notices.

Features

- High speed printing max.300mm/s, One touch cover open, Drop-in method for paper roll loading
- 16 gray scale function
- Reduced printing
- 180dpi emulation size font (Extended font)
- Two color printing
- Compact design, Small footprint
- Various paper width support max.Φ102, 83mm
- Standard auto-cutter
- Standard Buzzer
- PDF417, DataMatrix, barcodes
- High reliability
 - MCBF: 70 million lines
 - Head life: 150km
 - Cutter life: 2 million cuts
- Front paper ejection
- Splash-proof IEC 60529 IPX2
- RoHS and FUJITSU Super Green product

Dimensions

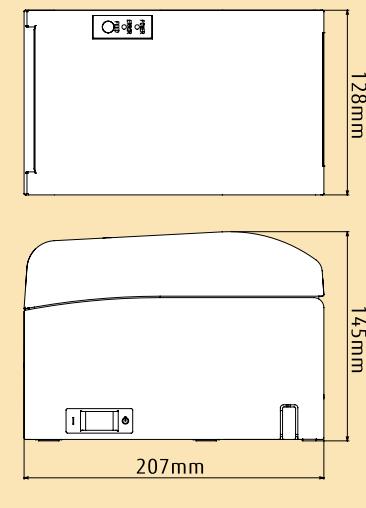

Green Policy Innovation **SUPER Green Product**
This product has the top-level environmental factor in the comparison with our previous product or product in market.

Super green product is the product which complies with Fujitsu group original severe environmental standard. FP-510II passes our own severe environmental standard, and it is called "Super Green Product". The use of Recyclable material, Material Label attachment and Downsizing supports the environment.



FUJITSU ISOTEC LIMITED
Printer Business Division
135,Higashinozaki,Hobara-machi,Date-shi,Fukushima
960-0695, JAPAN.
Phone : (81-24)574-2236 Fax : (81-24)574-2382
U R L : <http://jp.fujitsu.com/group/fit/en/>
Contact E-mail : fit-gsm@cs.jp.fujitsu.com