

## User's Manual


Product name : Switch Assy Immobilizer Antenna

Type : P74P0

Since this device is always used with vehicle, it is not sold to general end users separately. Therefore there is no user manual of this device by alone.

It communicates with IC used both as Transponder and Passive RKE through LF ANT(Z axis) of I-key H/U, and operates as ANT to exchange communication data depending on community signal with BCM.

The immobilizer antenna communicates with the transponder in the hand unit when the hand unit is brought close, and receives the code of the key. The immobilizer is used by bringing the hand unit close as shown in figure.

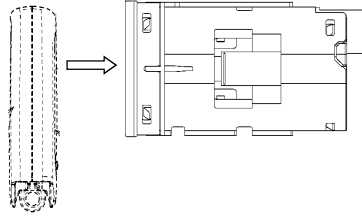


HUND UNIT

Switch Assy Immobilizer Antenna

The connector is arranged as shown in the figure below.

ピン番号 Pin number	信号名 Signal name
1	SW1
2	SGND
3	GND
4	NC
5	SW2
6	VCC
7	LED
8	LEDG
9	IMD
10	NC



CONNECTOR PIN LAYOUT

AC/DC Supply	DC12V
Range of voltage	DC6V~16V
Consumption current	Under 0.7mA (Standby current)
Size	W45.0xL57.7xH45.0 (mm)
Operating voltage	DC6~16V
Operating temperature range	-40~+85 degree C
Consumption current spec	MAX 150mA(@12.5V 25°C) at operation MAX 0.7mA(@12.5V 25°C) at standby
Weight	0.043kg
Operation of frequency	125kHz

The following statements must be described on the user manual of the vehicle;

### ■ CAUTION ■

- Pay attention to the following.  
(The operation range might be changed by the environment. )
  - Do not contact and bring metals close to the engine SW and the key.
  - It may not be operated when using the equipment of the same frequency band in the vicinity.
- Please DO NOT the following. Engine is not started by failure of electronic parts. (Product can not receive the signal correctly)
- Give a shock.
  - Get it wet. If it got wet, wipe and dry up.
  - Disassembly and modification.

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

### FCC WARNING

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.