



BTSP044
Bluetooth Speaker
User's Manual

1. Notice Before Using

Thank you for purchasing the Bluetooth® speaker BTSP044 . Please read this User's Manual completely before use.

BTSP044 designed for enjoy the high quality music wirelessly with a carriable size that based on the latest Bluetooth® wireless technology. BTSP044 can be easily connected to a mobile phone for call conversation and music listening, it is also capable to connect to the other Bluetooth®-enabled devices like Notebook, iPod etc.


BTSP044 is compliant with Bluetooth V2.1+EDR specification, supports HSP, HFP, A2DP profiles. BTSP044can use for phone call conversation as a hands-free speaker.

For more details, please read the user guide following.

2. Specification

Bluetooth specification: V2.1+EDR
Operation frequency: 2.402-2.48GHz
Supported profile: HSP, HFP, A2DP
Operation range: Up to 10 meters
Play time: 2 hours
Charge time: ~3 Hours

3. BTSP044 Bluetooth speaker overview

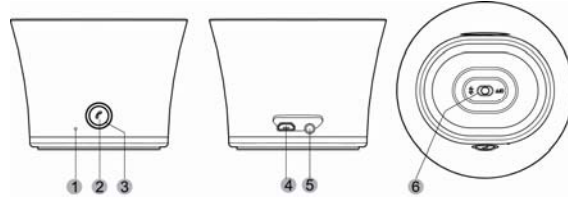

- ① Microphone
- ② Answer
- ③ Indicator LED
- ④ Charging Port
- ⑤ AUX IN port
- ⑥ ON/OFF Switch

4. Package contents list:

- 1) BTSP044 speaker
- 2) User Manual
- 3) USB Charging Cable
- 4) Audio cable

5. Battery information

The device is equipped with an integrated lithium-polymer battery. The battery cannot be replaced. Do not attempt to remove the battery from the device since it would damage the device. The full performance of a new battery is not achieved until after two or three complete charging-discharging cycles. The battery can be charged and discharged several hundred times, but it loses its capacity over time. Disconnect the BTSP044 from the power supply as soon as the battery is fully charged, overcharging would reduce the service life of the battery. A charged battery will lose its capacity if it is not used on a regular basis.

Important:

Ensure that the battery is fully charged if you do not use the device for a long period of time. To avoid a complete discharge of the battery, the BTSP044 should be charged at least every 6 months.


6. Charging the battery

The BTSP044 is operated with a rechargeable battery. Charge the battery completely before its first use. Read the section "Battery information" before starting the charging process.

- 1) Connect USB cable to a general USB power supplier.
- 2) Connect the charger to the proper outlet.

- 3) When the charger is connected to the speaker, the red indicator light will turn on. Charging the battery fully may take up to 3 hours.

- ① Micro Connector
- ② USB A Connector
- ③ Micro USB Charge Port



- 4) When the battery is fully charged, the red indicator light will turn off. Disconnect the charger from the speaker and the outlet. The speaker is ready to use.

NOTE:

- Give your speaker a full charge before using for the first time.
- When the battery power is low, and the red indicator light starts to flash.

7. Pair to your Bluetooth® phone

Before you use your speaker the first time, you must pair the unit with a Bluetooth® enabled mobile phone. Pairing is a one-time process and required only for the first connection with the Mobile phone. The BTSP044 can be connected with two mobile phones simultaneously.

- 1) Keep the BTSP044 within 1 meter range of a Bluetooth®-ready Mobile phone.
- 2) Slide the Power Switch to On position, the indicator flashes red and blue intermittently, the device is now in pairing mode.
- 3) Find the Bluetooth® setting of your Mobile phone and start the search for Bluetooth® devices. (For further details, please read the operating instructions of your Mobile phone).
- 4) From the list of devices found, select the " BTSP044".
- 5) If required, enter the PIN code "0000" and confirm the entry. Once the pairing process was successful, the PBT511 will connect to Mobile phone automatically then switch to standby mode, the indicator will light blue constantly.

Note:

If pairing is not completed within 10 minutes, the speaker will turn off. If this happens, please repeat the pairing steps.

8. Turning Speaker on /off

Turn on your speaker

Before you can start using your speaker, you must first charge the rechargeable battery.

Once charged, slide the ON/OFF switch to the ON position to power on your speaker.

If your speaker have completed the pairing process successfully, when the speaker

are turned on, it will connect to the phone you last connected to automatically. Please ensure your phone's Bluetooth® function is active.

Turn off the speaker

Slide the switch to OFF position to power down your device.

Note:

- 1) To conserve power, if the speaker is not connected to any mobile phone, it will enter pairing mode, and turn off automatically 10 minutes later. You should toggle the power switch again to turn on the speaker.
- 2) Please slide the switch to OFF position to cut off the power completely when leaving the speaker unused.
- 3)

9. Listening to Music on Your Speaker

Play/Pause

Press **Answer** button to get music from your audio source to play or pause.

External audio input

PBT511 supports the AUX input for the wired external audio source connection. The speaker should turn on the power when you want to use AUX input. When plug in the audio cable the speaker will pause the playing of your mobile phone when streaming the music from Bluetooth.

Note:

The BTSP044 supports A2DP profile that allows stereo music to stream from a Bluetooth phone. The music will pause automatically while a call is dialed incoming, and resume when the call has ended.

10. Using for phone call

Last number re-dialing

Press and hold **ANSWER** button for 2 seconds, the last number you dialed will be re-dialed.

Answering a call

Press **Answer button** to answer the incoming call.

Ending a call

Press the **Answer button** to end a call.

11. Safety and general information

- 1) Please read this User's Manual carefully and follow all instructions.
- 2) To avoid any damage or malfunction of the device do not drop the device from high places.
- 3) Keep device away from humidity, water and any other liquid. If the device is exposed to water, moisture and other liquids do not operate it to avoid any electrical shock, explosion and damage to the device or yourself.
- 4) Do not place or keep this device near any heat sources, such as, direct sunlight, radiators, stoves or other apparatus that produce heat. This may cause an explosion, degrade the performance and/or reduce battery life.

- 5) Do not modify, repair or disassemble device (Especially the battery). Doing this will void the warranty.
- 6) Do not place heavy objects on the device.
- 7) Use only the supplied and approved chargers.
- 8) Unplug this device when unused for long periods of time or during lightening storms.
- 9) The battery used in this device may present a risk of fire or chemical burn if mistreated.

12. FCC & IC Statement

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

13. EC Declaration of Conformity

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment.

Such modifications could void the user's authority to operate the equipment. This product is CE certified according to the provision of the R&TTE Directive (99/5/EC). This declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. Please note that this product uses radio frequency bands not harmonized within EU.

Within the EU this product is intended to be used in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, The Netherlands, Portugal, Spain, Sweden, and United Kingdom and within EFTA in Iceland, Norway and Switzerland.

14. Warranty

The condition of this warranty and supplier's responsibilities under this warranty are as follows:

Warranty is non-transferable and is limited to the original purchaser only.

- You must be able to prove the date of original purchase of the unit with a dated receipt.

- The warranty is not applicable if the product has been subject to physical abuse, improper installation, modification or repair by an unauthorized third party.

- Supplier's responsibility shall be limited to the repair or replacement of the product at its sole discretion.

- Specifically exempt from any warranty are limited-life consumable components subject to normal wear and tear such as batteries, decorates and other accessories.
- Supplier is not responsible, for failure resulting from accident, abuse, misuse, or any unauthorized repair, or modification.
- Modification and repair of the unit should be done by an authorized and qualified service center or returned to the manufacturer.
- This warranty gives you specific legal rights, and you may also have other rights, which vary under local laws.