


IndoorManagertm Owners Manual

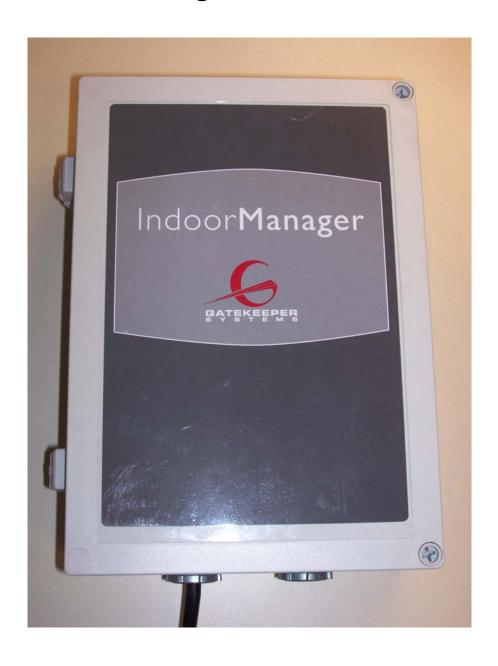

FCC RF Exposure Statement

To satisfy RF exposure requirements, this device and its antenna must operate with a separation distance of at least 20 centimeters from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

INSTRUCTION TO THE USER

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a typical installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna on the device experiencing the interference
- Increase the separation between the IndoorManager and the equipment experiencing the interference.
- Connect the equipment into an outlet on a circuit different from that to which the IndoorManager is connected
- Consult the dealer or experienced technician for the device experiencing the interference

In order to maintain compliance with FCC regulations, no changes can be made to this equipment without the approval of Gatekeeper Systems, Inc. The user is cautioned that any changes or modifications made to the equipment without the approval of Gatekeeper Systems, Inc. could void the user's authority to operate this equipment.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This device has been designed to operate with the antennas listed below, and having a maximum gain of 12 dBi. Antennas not included in this list or having a gain greater than 12 dBi are strictly prohibited for use with this device. The required antenna impedance is 50 ohms.

Approved Antenna List:

- 1. Cushcraft S2401240P12NF
- 2. Cushcraft S2408P12NF
- 3. Nearson S151AM-2450S

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

The Gatekeeper Systems IndoorManagertm (IM) is a general purpose transmitter used to communicate with the Gatekeeper Systems SmartWheeltm family of wheels.


Installation and configuration of the IM should only be performed by qualified Gatekeeper Systems personnel.

To power on the IM, open the cover and press the power switch down. See figure 1.

The status of the IM may be determined by the status LEDs located on the side of the IM. See figure 2 and Table 1 for details.

Power Switch Location



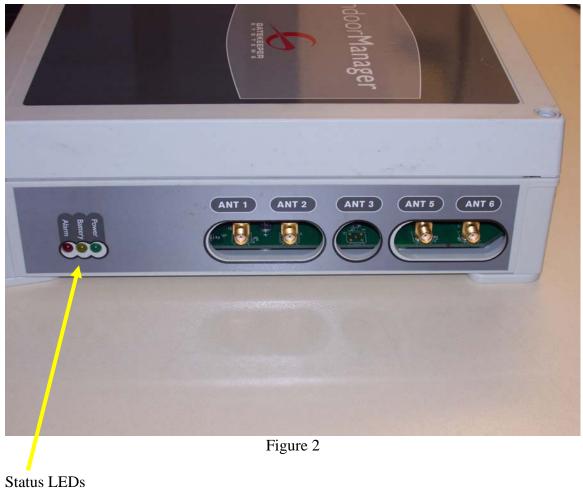

Status LED Summary

zuwa 222 zummu j	
LED	Meaning
Solid Green	Unit is powered up (either by AC or from the internal battery)
Solid Yellow	Unit is operating from internal battery – check AC power
Flashing Yellow	Internal battery fault or disconnected – Contact Gatekeeper Systems
Flashing Red	Unit is misconfigured – Contact Gatekeeper Systems
Solid Red	Hardware fault – Contact Gatekeeper Systems

Table 1

Contacting Gatekeeper Systems

For more information about the Indoor Manager and troubleshooting, to order parts or report an issue, contact the Gatekeeper Systems Inc. regional Customer Support office nearest to your location.

USA

Gatekeeper Systems, Inc. 8 Studebaker Irvine, CA 92618 (888) 808-9433

Canada

Gatekeeper Systems Canada, Ltd. 272 Galaxy Boulevard Etobicoke, Ontario Canada M9W 5R8 (888) 525-3564

All Other Areas

Gatekeeper Systems SAS 58 rue de Neuilly Parc des Guillaumes 93130 Noisy Le Sec France +33 1 48 54 76 78