

# TREKZ TITANIUM

User Guide

# Set up your Trekz Titanium

## 1. Charge

Charge the headphones with the included micro-USB charging cable. The LED indicator will turn blue when charging is complete.

## 2. Pair


While off, press and hold the power button for 5 seconds to enter pairing mode. The LED indicator will flash blue and red repeatedly while in discovery.

## 3. Connect

Enable the Bluetooth® settings on your device and select "Trekz Titanium by AfterShokz". The LED indicator will turn blue once connected.

Let us take care of you! →

We've got your back against damages.  
Register your Trekz at [bit.ly/RegisterMyTrekz](https://bit.ly/RegisterMyTrekz)

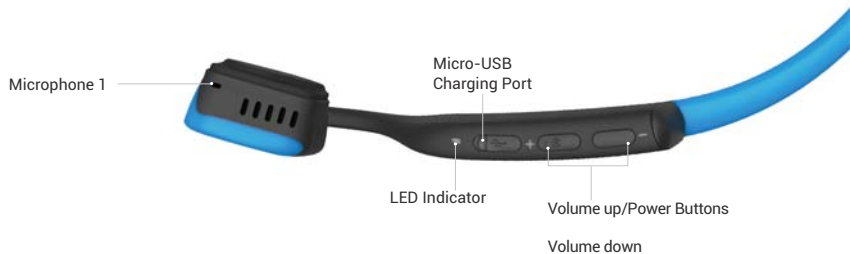


## Multifunction Button (A)

Function	Action	Prompt/"Audrey Says" <sup>TM</sup>
Play/pause music	Click once	One beep
Skip to next song	Double-click while music is playing	One beep
Answer/end call	Click once	One beep
Answer call waiting and put the current caller on hold	Click once to switch between callers	One beep
Answer call waiting and hang up on current caller	Press and hold for 2 seconds	One beep
Reject a call	Press and hold for 2 seconds	Two beeps
Voice dial	Press and hold for 2 seconds	"Voice dial"
Redial last number	Double-click	"Last number redial"



## Volume Up/Power Button (B)    Volume Down Button (C)

Function	Action	Prompt/"Audrey Says" <sup>TM</sup>
Power on/off	Press and hold the power button for 2 seconds	Four beeps and "welcome to Trekz Titanium"
Mute	Press and hold both buttons for 2 seconds while on a call	"Mute on" or "mute off"
Change EQ setting	Press and hold both buttons for 2 seconds while music is playing	"Equalization changed"
Check battery status	Click the volume up or down button while music is paused	"Battery high, medium, low (or) charge me"
Adjust volume	Click the volume up or down button to adjust volume	One beep



## Specifications

Part number	AS600
Speaker type	Bone conduction transducer
Frequency response	20Hz~20KHz
Sensitivity	100 ± 3dB
Microphone	-40dB ± 3dB
Bluetooth® version	Bluetooth® v4.1
Compatible profiles	A2DP, AVRCP, HSP, HFP

Wireless range	33 ft (10m)
Battery	Rechargeable lithium ion
Continuous play	6 hours
Standby time	10 days
Charge time	1.5 hours
Weight	1.27 oz (36g)
Warranty	2 years

## Multipoint pairing

1. Enter pairing mode
2. Press the multifunction button and volume up/power button for 2 seconds (Audrey Says™ "multipoint enabled")
3. Pair first device (Audrey Says™ "connected")
4. Shut down
5. Re-enter pairing mode
6. Pair second device (Audrey Says™ "second device connected")
7. Turn the device off, then power back on

## How to reset your headphones

Enter pairing mode, then press and hold the multifunction button, and both volume buttons simultaneously for 3 seconds.

## LED indicator

Solid red	Charging
Solid blue	Charging complete
Flashes red and blue	Pairing mode
Flashes blue	Incoming call
Flashes red every 2 minutes	Low battery

## Optional Accessories

---

### Fitband (D)

Silicon rubber bands provide adjustability to accommodate smaller head sizes.

1. Slide Fitband (R) over the right transducer and along the right arm to rest over the charging port.
2. Slide Fitband (L) over the left transducer and along the left arm to align evenly with the right arm.
3. Rotate the Fitbands around the arms until the desired fit is achieved.



### Earplugs (E)

Use with headphones in environments where it is safe to block out ambient noise, such as on an airplane or train.

1. Roll earplugs firmly between fingers and place in ears.
2. To adjust EQ settings to reduce or enhance bass while wearing earplugs, press and hold volume up and down buttons simultaneously.



---

We're all ears! Got a question? Eager to share an experience?

Send us an email, or give us a call: [support@aftershokz.com](mailto:support@aftershokz.com) | (315) 290-3855

To view this user guide in additional languages, visit [bit.ly/TrekzUserGuide](https://bit.ly/TrekzUserGuide)

## Storage and maintenance

---

- Store the headphones in a cool and dry place. The working temperature should be 0~45°C(32~113°F). Working in cold/hot environments or highly humid areas may reduce the life of the battery.
- After storing the headphones for an extended period, charge the unit before using it again.
- The headphones are sweat resistant, but are NOT waterproof. DO NOT submerge the headphones in water.
- Listening with headphones at a high volume may affect your hearing and may distort the audio.
- When cleaning the headphones, use a soft dry cloth.
- Do not charge your headphones immediately after exercising, as any sweat or moisture inside the charging port could lead to a circuit burning.

### **Note:**

Design and specifications are subject to change without notice. For the most up-to-date product information, please visit [www.aftershokz.com](http://www.aftershokz.com).

## FCC caution

---

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

### **Note:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Declaration of Conformity of Industry of Canada

---

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device.

This Class (B) digital apparatus complies with Canadian ICES-003.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the device.

Toute modification non approuvée explicitement par le fournisseur de licence de l'appareil peut entraîner l'annulation du droit de l'utilisateur à utiliser l'appareil.

#### **IC Radiation Exposure Statement**

This equipment complies with Canada radiation exposure limits set forth for uncontrolled environments.

#### **Déclaration d'exposition aux radiations:**

Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les États-Unis et le Canada établies pour un environnement non contrôlé. Le produit est sûr pour un fonctionnement tel que décrit dans ce manuel.



**FCC RF EXPOSURE STATEMENT:**

The device has been evaluated to meet general RF exposure requirement, The device can be used in portable exposure condition without restriction.

Due to the used enclosure material, the devices shall only be connected to a USB Interface of version 2.0 or higher.

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Do not use the devices in the environment at too high or too low temperature, never expose the under strong sunshine or too wet environment. The suitable temperature for the devices is 0~+45°C.

**EU Regulatory Conformance**

Hereby, AfterShokz, LLC declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.



Please take your used, unwanted lithium batteries to a designated place. Do not dispose of them in a rubbish bin.



### Sound pressure warning statement

For the device that is tested in accordance with EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013, it is mandatory to perform audio test for EN50332.

This device has been tested to comply with the Sound Pressure Level requirement in the applicable EN 50332-1 and/or EN 50332-2 standards. Permanent hearing loss may occur if earphones or headphones are used at high volume for prolonged period of time.



Warning statement: To prevent possible hearing damage, do not listen at high volume levels for long periods.

This device is in compliance with the requirements of IDA.

**Complies with**  
**IDA Standards**  
**DA107248**

#beopen

Visit us at [aftershokz.com](https://aftershokz.com)