



Wireless Security Solutions



RE122 GE-Compatible NanoMax Door / Window

Features

- For sensing things that open or separate.
- Magnet and Internal reed switch operation.
- 1-inch magnet gap!
- External Contact.
- Cover tamper.
- Strong, reliable RF signal.
- 6+ year battery life on CR1632 battery.
- Low Battery indication.

Key Instructions

- Battery “+” faces up.
- Enrolling:
 - Place control panel in Learn Sensor Mode
 - Open cover to tamper device, or
 - Tamper enrollment signal can be sent by touching a magnet to the sensor 5 times within 5 seconds

Operation


- Magnetic and hardwire zone
 - Alarm, when...
 - ... magnet is pulled away from reed switch or
 - ... hardwire changes to alarm.
 - Tamper, when cover is opened.
 - Supervisories, every hour.

Specifications

Magnet trip distance:	1 inch nominal
Mounting fastener:	3M VHB (Very High Bond) Tape
Replacement Battery:	CR1632
Temperature Range:	0F to 120F
Housing dimensions:	1.8 x .77 x .39 inches

Specifications subject to change without notice.

Internal Picture

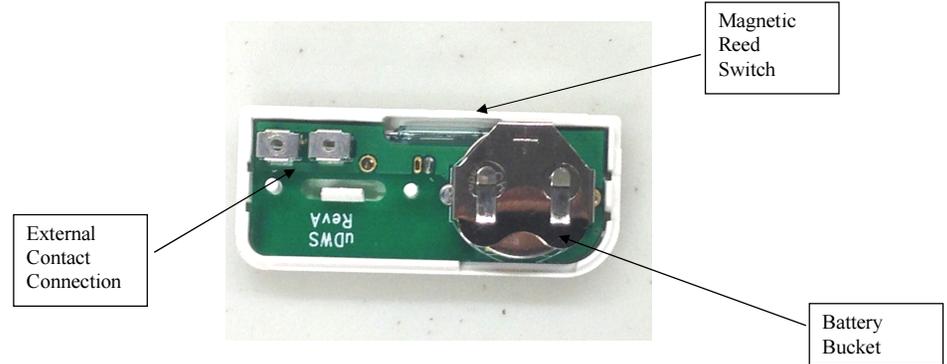

Notices

Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE122

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE122