



User Manual



Contents

A. Components 1

B. H/W Parts

i. Both Sides 2

ii. Settings 3

C. System Settings

i. Date & Time 5

ii. Wi-Fi 7

iii. Sleep 8

iv. Language 9

D. Application

i. Settings 10

ii. Full Analysis

CRM 11

Moisture 12

Sebum 13

Pore 14

Melanin 15

Acne 16

Wrinkle 17

Sensitivity 18

Result 19

i. Email 20

ii. Mirroring 21


iii. View Mode 23

E. Warranty 24


※ Notes on use

- The images of this manual can be different with the actual things.
- The information contained in this manual and future improvements are subject to change without notice.
- The latest version of the manual will be updated at the below link.
<http://www.aramhuvis.com/downloads>


Components



Skin lens

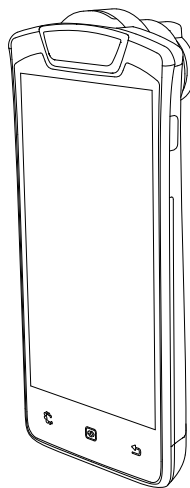


Main unit with skin lens

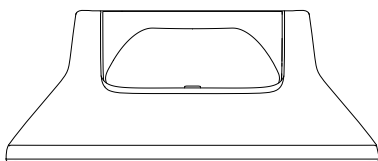


Cradle



Sebum paper
(100ea)




Charger (5V/3A)




USB cable



Cleaning cloth




Manual



Air blower


H/W Parts

Both Sides

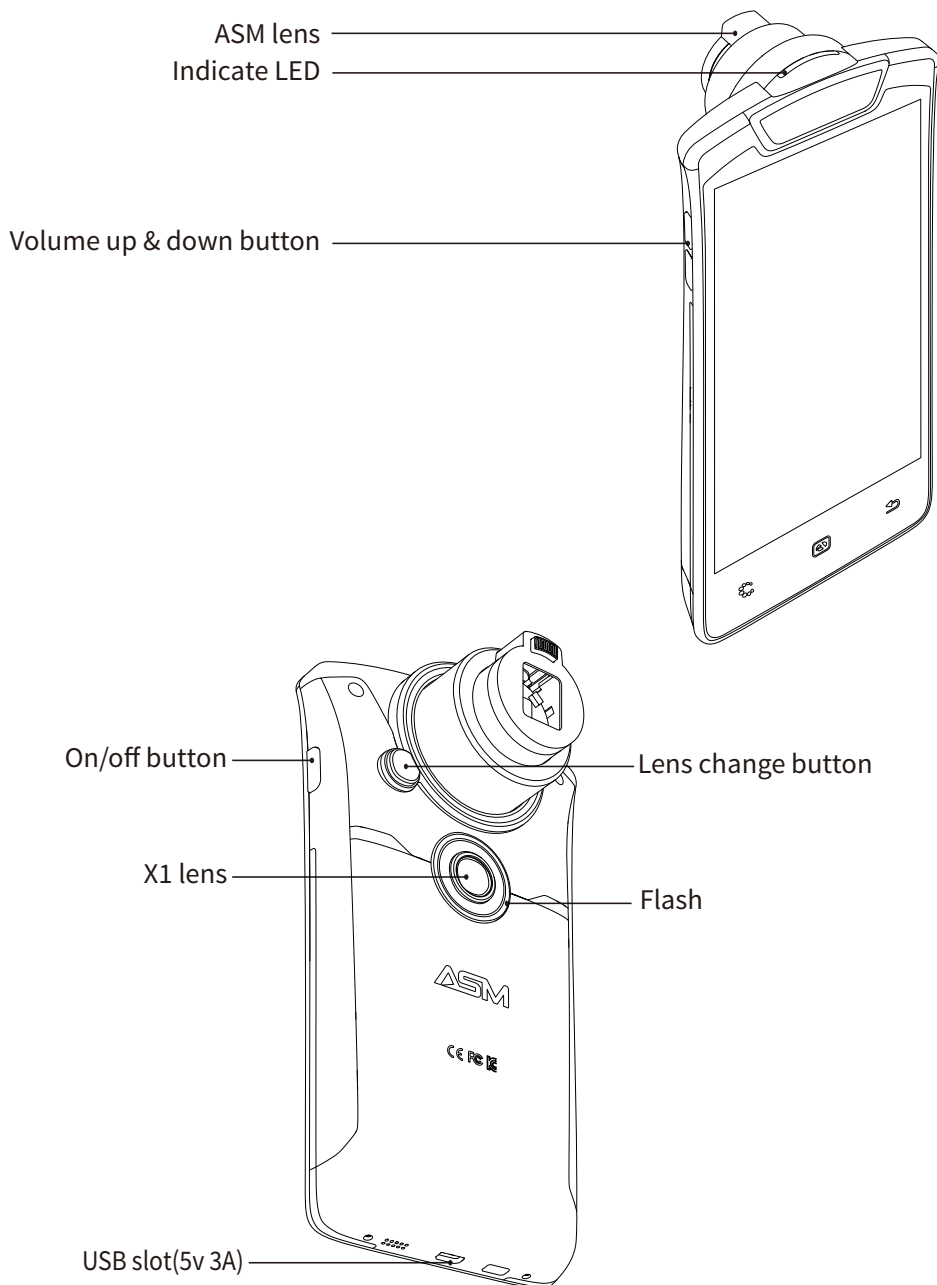

H/W Parts

Settings

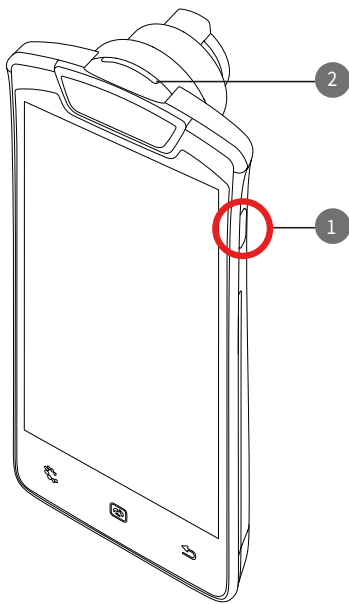

How to turn on the power

- 1 Press and hold "Power" button.
- 2 Take your finger off from the button after "Indicate LED" turned on blue.



How to turn off on the power

- 1 Press and hold "Power" button.
- 2 Touch "Power off".

H/W Parts


Settings

The default charger is American plug.


Plug can be added or changed for each country. (EU, UK, AU and etc)

Refer to the details as below how to change the plug type.


- ① Pull out american type plug from adaptor.

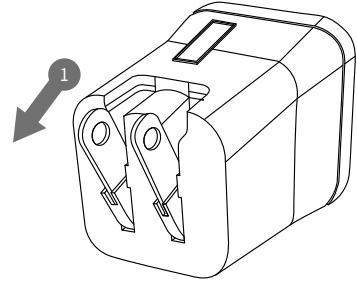

- ② For European type, push down European plug to American plug on the adaptor.

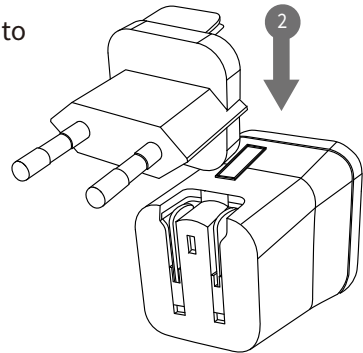

- ③ Connect USB port with charger.

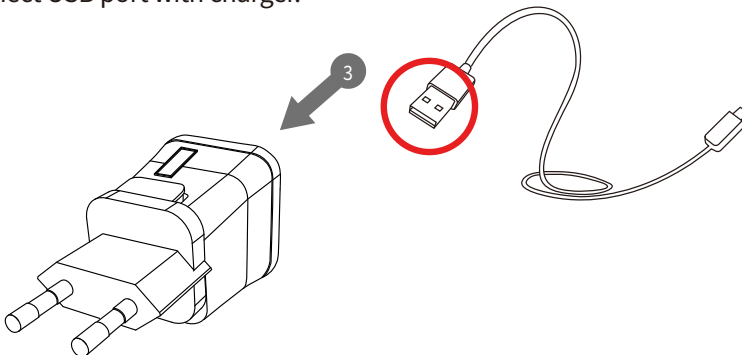

System Settings


Date & Time




1 Touch  button.



2 Touch  button.

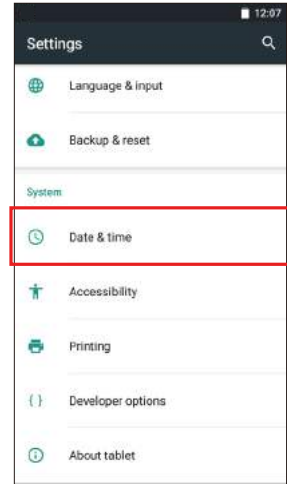


3 Go to "Date & time"

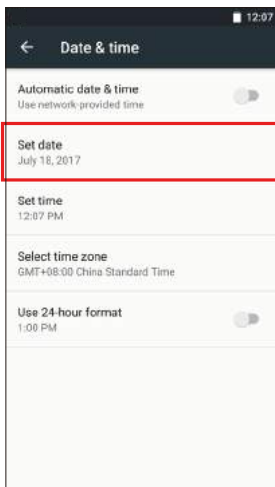

4 Go to "Set date".




5 Select the date and touch "OK" button.

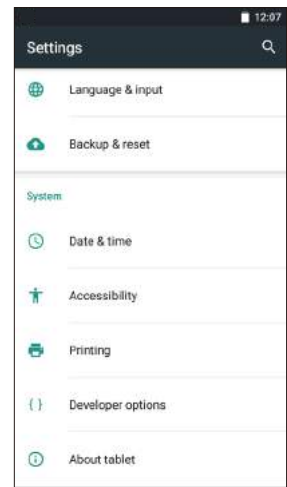


6 Check if the setting is correctly applied.

System Settings


Date & Time

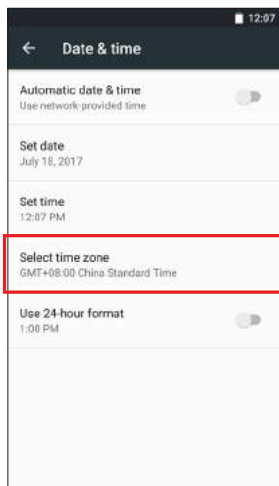


7 Touch “Select time zone”

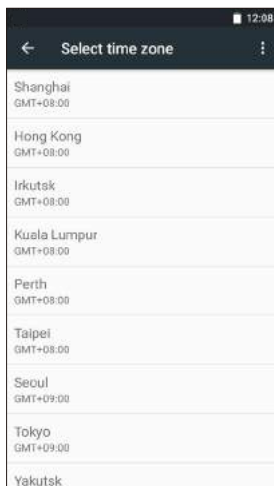


8 Select proper time zone.

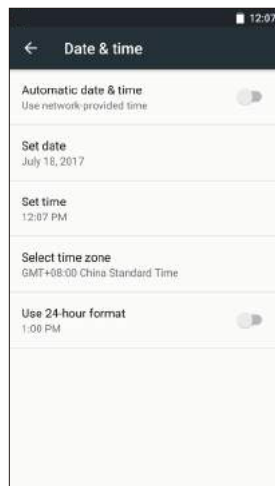


9 Check if the setting is correctly applied.

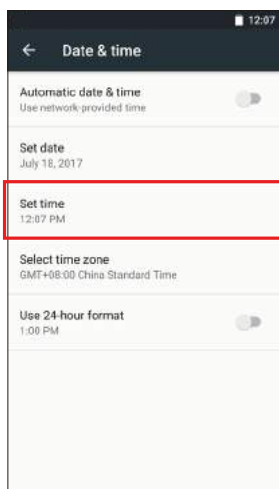

10 Touch “Set time”.

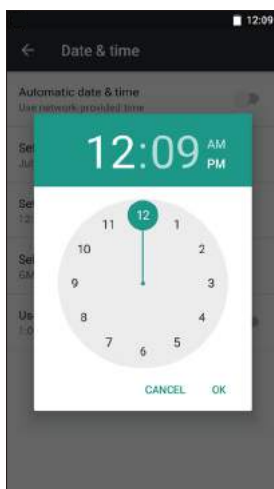


11 Change into the current time and touch “OK” button.

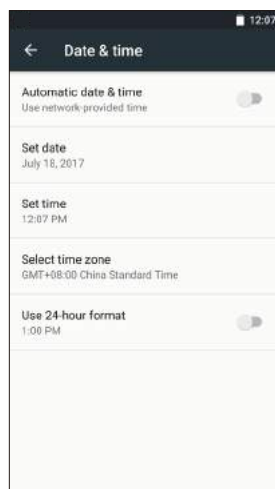


12 Check if the setting is correctly applied.

System Settings

Wi-Fi

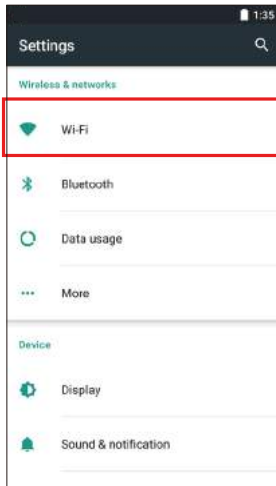


1 Touch "Wi-Fi".

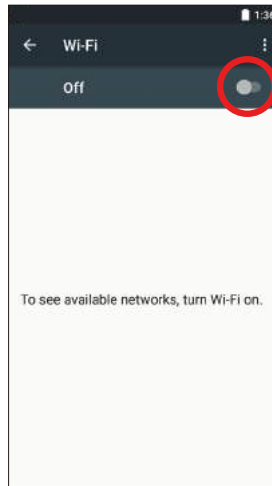

2 Turn on Wi-Fi using On/Off button



3 Choose proper Wi-Fi signal.

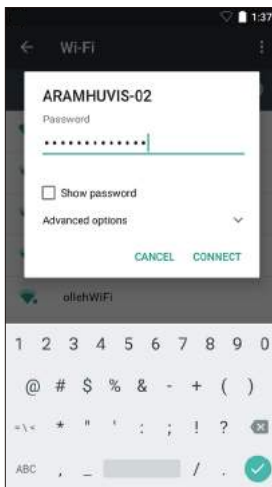

4 Put Wi-Fi password.



5 Wait until the device is connected to Wi-Fi.

System Settings

Wi-Fi



- 7 Once the device is connected to Wi-Fi, you could see the Wi-Fi mark on upper side of the screen.

Wi-Fi Usage

Email


Wi-Fi connection is needed to send analysis data by email.

*Reference : page 7 (Wi-Fi), page 20(Email).


Software update

In order to update the software version.


Sleep

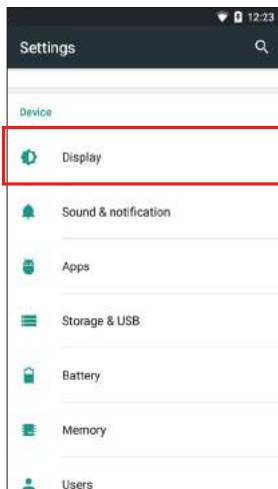

- 1 Touch "Display".

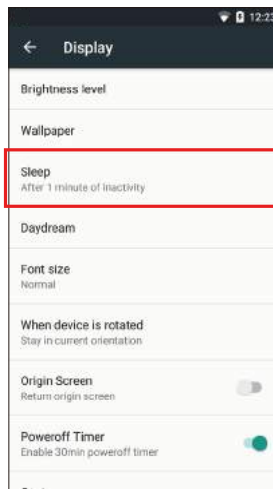


- 2 Go to "Sleep".

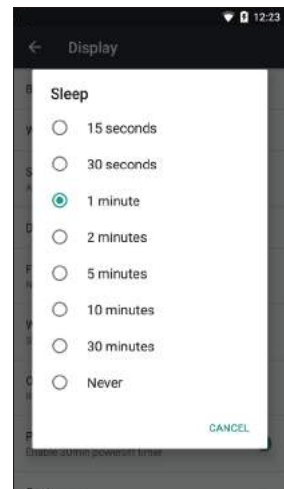


- 3 Select the option you want to apply.

System Settings

Language

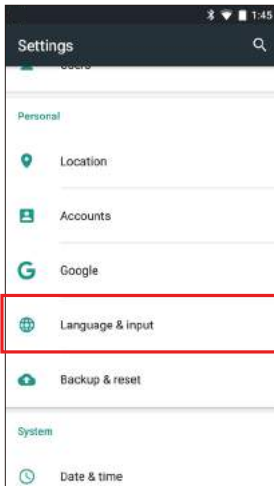

1 Touch "Language & input".

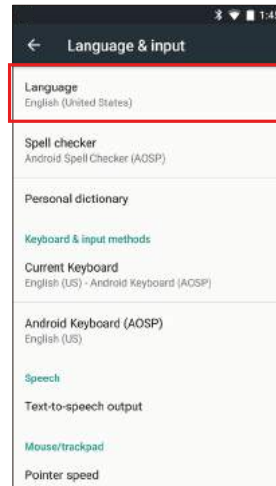

2 Go to "Language".




3 Select preferred language.

Application


Settings



1 Touch ⚙ button.

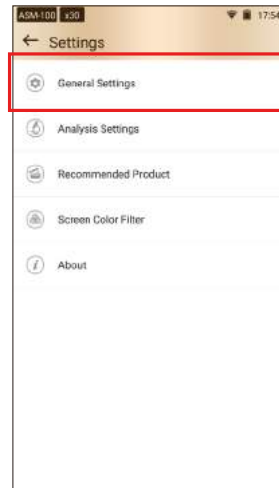

2 Go to "General Settings".

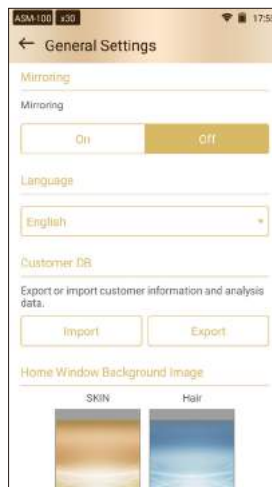

3 Available to change Language, Version and Email setting.

Application


CRM




1 Touch "Customer".



2 Touch + to register new customer.

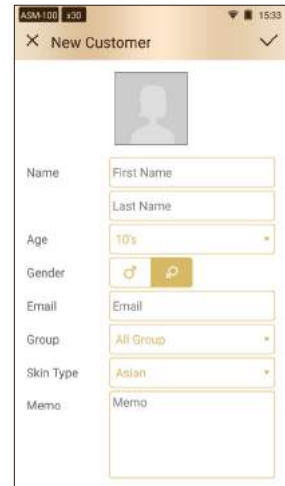


3 Input the information.

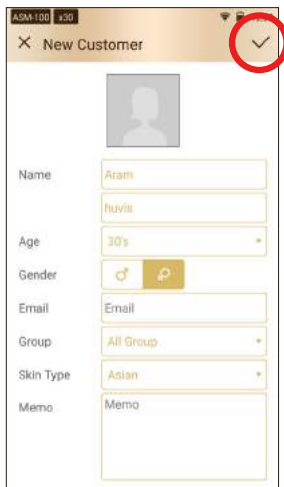

4 After putting all information, touch ✓.



5 User's profile is created on the list. Then touch user's profile to start analyzing.

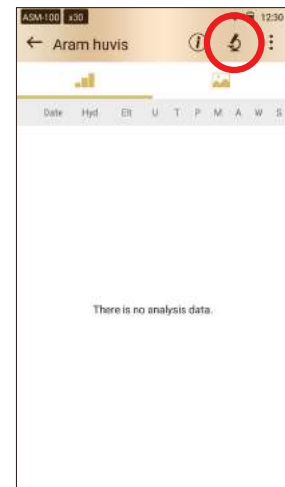


6 Touch 🔍 button to start analyzing.

Application


Moisture



- 1 Touch the  button.
Please wait until vibration and sound.
** Never put the sensor on the skin before the message "Touch to skin please".*

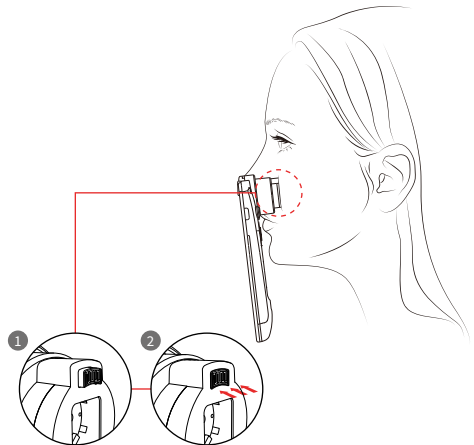

- 2 After checking the message "Touch to skin please", push the sensor completely to marked area of the face.
** All surface of the sensor should be pushed completely.*

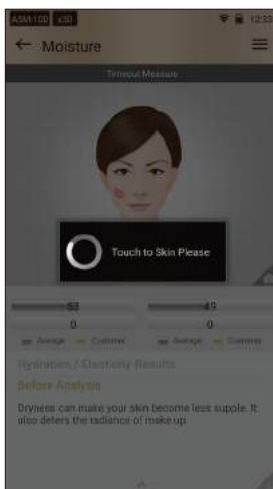

- 3 Analyzing hydration and elasticity...




- 4 Check the result.
To move on next page, slide the screen from right to left.

Application


Sebum




- 1 Put the sebum paper on U-zone of the cheek, then press it for 2-3 seconds.

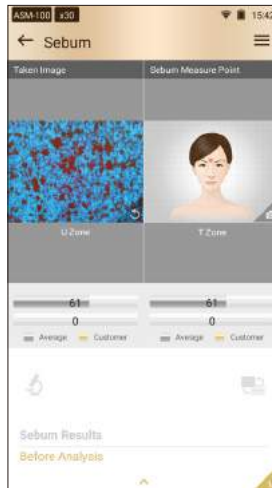


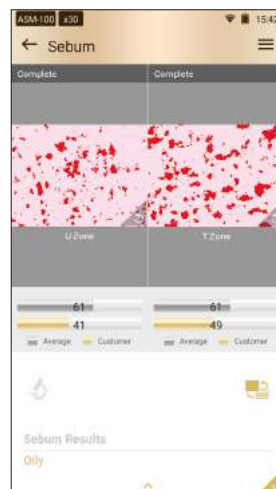
- 2 Take a picture of pink area of the sebum paper.

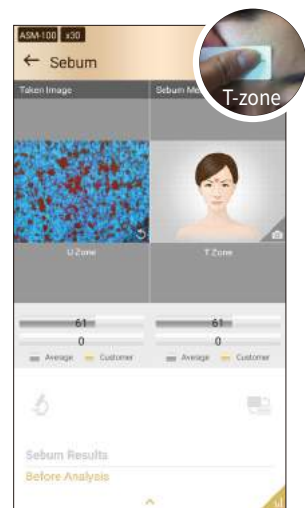

- 3 Put the sebum paper on T-zone of forehead, then press it for 2-3 seconds.

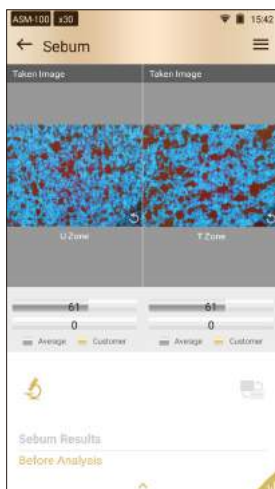

- 4 Take a picture of pink area of the sebum paper. Then, touch  button to analyze.



- 5 Sebum result will appear.


Application


Pore




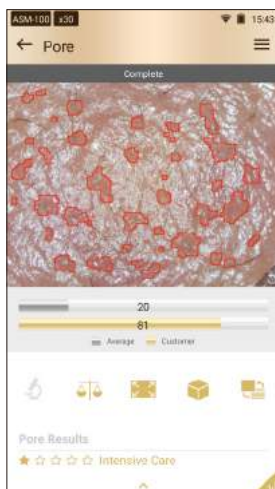
- 1 Touch  to activate camera and put the camera onto the marked area of the face.



- 2 Touch screen to bring a camera into focus and then touch  to take a picture.

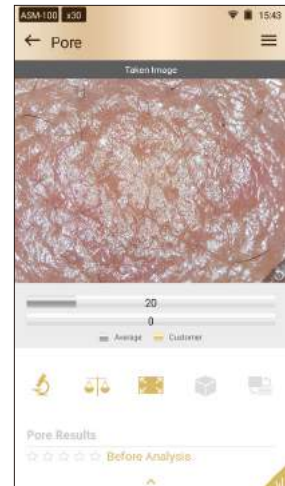


- 3 Touch  button to analyze.



- 4 Result will appear.



- 5 Touch  button to compare taken image with 3 sample images.
- Good/Normal/Bad




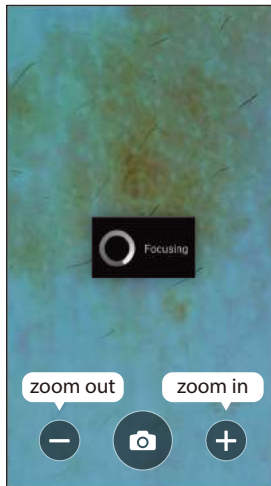
- 6 Touch  button to convert taken pore image in 3D.


Application


Melanin



- 1 Touch  to activate camera and put the camera onto the marked area of the face.



- 2 Touch screen to bring a camera into focus and then touch  to take a picture.

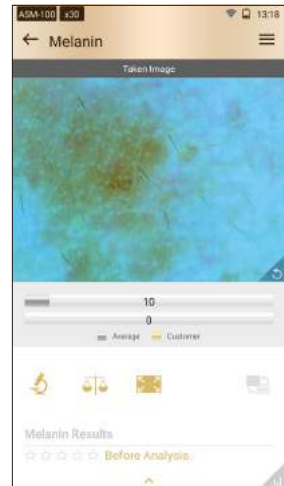


- 3 Touch  button to analyze.



- 4 Result will appear.



- 5 Touch  button to compare taken image with 3 sample images.
- Good/Normal/Bad


Application

Acne




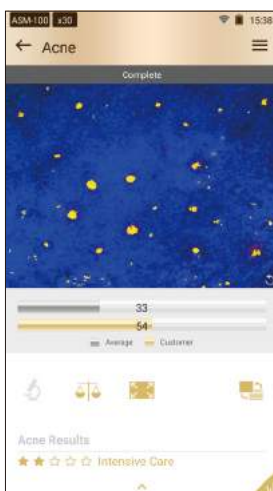
- 1 Touch  to activate camera and put the camera onto the marked area of the face.




- 2 Touch screen to bring a camera into focus and then touch  to take a picture.




- 3 Touch  button to analyze.



- 4 Result will appear.

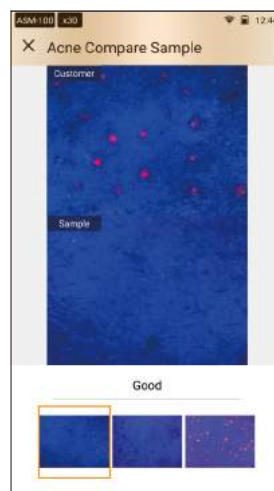


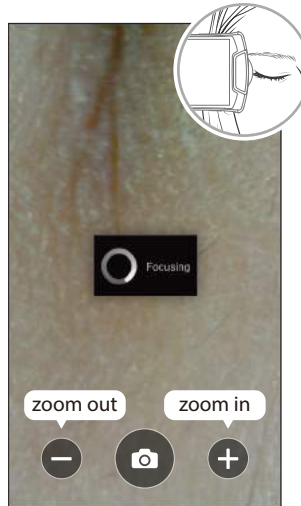
- 5 Touch  button to compare taken image with 3 sample images.
- Good/Normal/Bad

Application


Wrinkle




- 1 Touch  to activate camera and put the camera onto the marked area of the face.



- 2 Touch screen to bring a camera into focus and then touch  to take a picture.
* For wrinkle photo, take picture of outer eye area in widthways to check crow's feet.

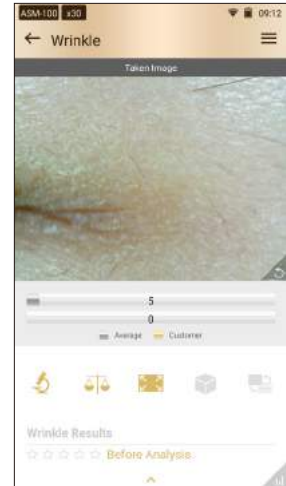



- 3 Touch  button to analyze.



- 4 Result will appear.



- 5 Touch  button to compare taken image with 3 sample images.
- Good/Normal/Bad

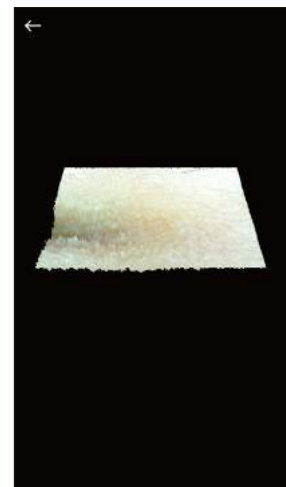

- 6 Touch  button to convert taken pore image in 3D.


Application

Sensitivity




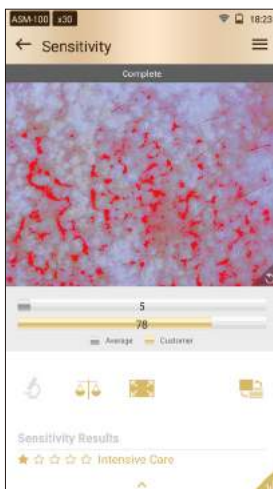
- 1 Touch  to activate camera and put the camera onto the marked area of the face.



- 2 Touch screen to bring a camera into focus and then touch  to take a picture.




- 3 Touch  button to analyze.




- 4 Result will appear.




- 5 Touch  button to compare taken image with 3 sample images.
- Good/Normal/Bad

Application

Result

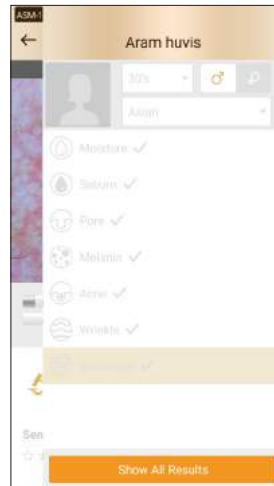

- 1 Touch  button or "Show All Result" to see overall result.

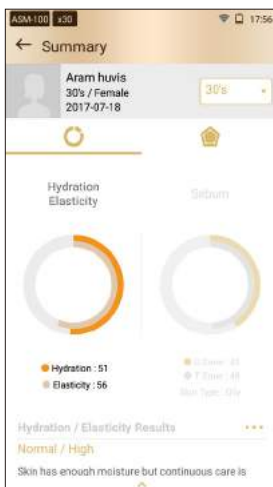

- 2 Available to check the result.
The worst results will be marked in red.

Application


Email




- 1 Before sending Email, the device shall be connected to Wi-Fi.* Reference : page 7.




- 2 Touch .

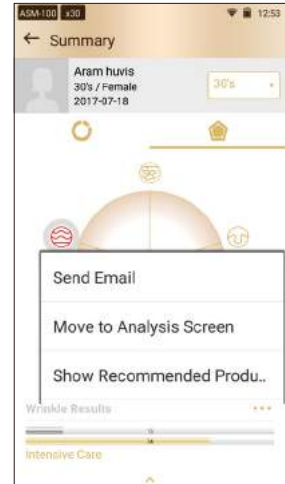


- 3 Go to "Send Email".

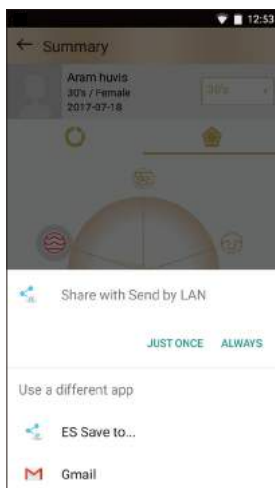

- 4 Select "Gmail"

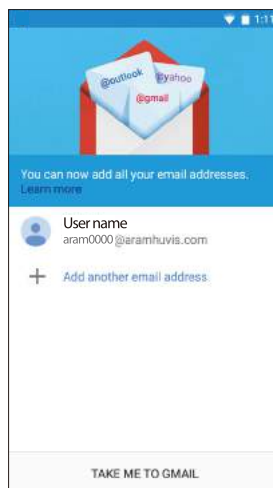

- 5 Select the mail account to register on the list.

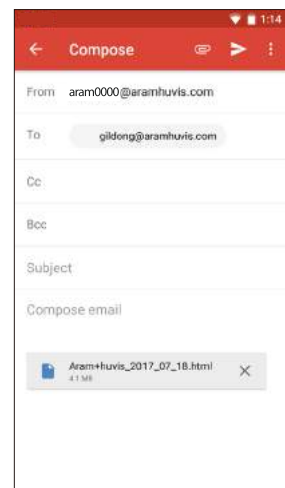


- 6 After selecting sender's mail address, put receiver's mail address. Then touch "Send" button.

Application

Mirroring



1 Touch ⚙ button.

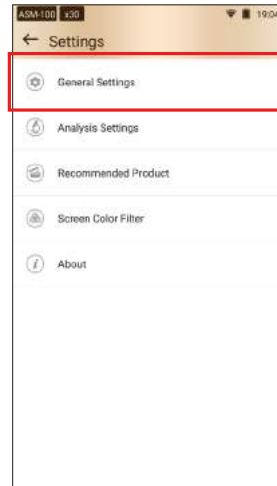

2 Go to "General Settings".




3 Set the mirroring option "On".



4 Capture QR code using QR code reader app. Automatically moved to App store.

Application


Mirroring

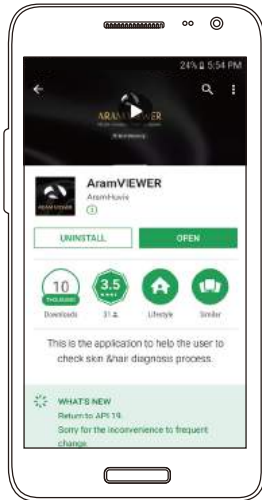

5 Install “Aram VIEWER”.



6 Then, go to “Wi-Fi Setting”.

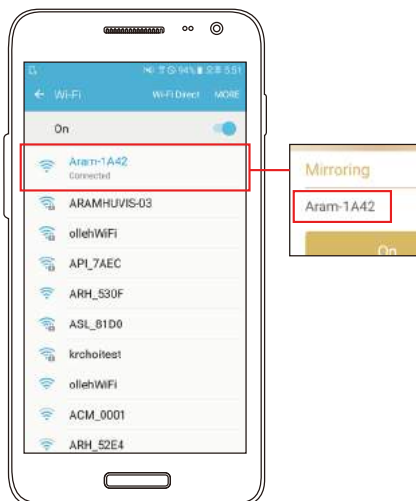

7 In your mobile device go to Wi-Fi setting. Then find SSID and connect it.




8 Mirroring will be started.

Application


View Mode



1 Touch "View".

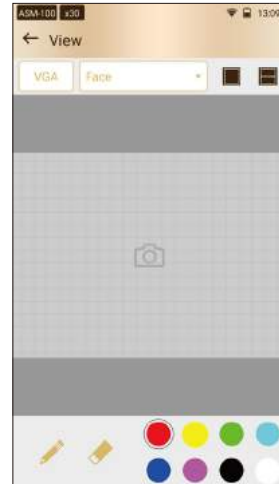

2 In view mode, it is able to take pictures with capture button.

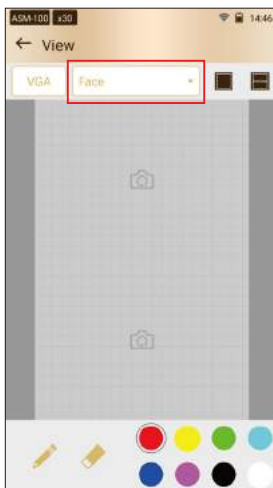

3 The user can select analysis parameter to take pictures in proper mode.



4 The user can mark the defect or concern according to the image with note function.

Warranty

- 1 The product undergoes strict quality management and inspection process before production and introduction to market.
- 2 In case of functional or operational defect occurs under normal condition of use within 10 days after purchase, we will repair it for free or replace in new product.
- 3 When this product goes out under the normal use, we will repair it free of charge under warranty.
- 4 Repair cost could be charged after warranty period.
- 5 For this product, warranty period is 14 months from the Invoice date.
- 6 Cost
 - Within warranty : Sending delivery(Buyer), repair cost and returning delivery(Aram)
 - If the product is broken by user's fault, repair cost could be charged.
 - After warranty : Sending delivery and repair cost(Buyer), returning delivery(Aram)
- 7 How to send :
 - Please mail to support@aramhuvis.com to receive information and proper instruction.
 - Tel : +82 70 4687 1712

MEMO

FCC Compliance Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC Radiation Exposure Statement

IEEE 802.11b or 802.11g operation of this product in the USA is firmware-limited to channels 1 through 11.

If the device is going to be operated in the 5.15 - 5.25 frequency range, then it is restricted to indoor environment only. This device meets all other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

Operating Temperature : - 10 °C ~ 50 °C



HEAD OFFICE

#401~402 Bundang Seoul National University Hospital Health Care Innovation Park, 172, Dolma-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13605 Rep. Korea

PRODUCTION DIVISION & FACTORY

#909 Byucksan Technopia, 560, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13230 Rep. Korea

Tel: 070-4687-1712 / Fax: 031-732-6330 / Email: info@aramhuvis.com
<http://www.aramhuvis.com>