




Wireless Resident Monitoring Solutions

Asset Tracking Device Operational Instructions

The HomeFree system is designed to monitor special needs individuals in the care center environment. The ATT (Asset Tracking Tag) is one of the many unique elements of this system.

The ATT is a transmitter that is designed for installation on material assets such as computers and printers located within the monitored area. When the monitored item is in motion, the ATT transmits a signal that enables the item to be tracked. **The ATT is not for use outside the monitored area.**

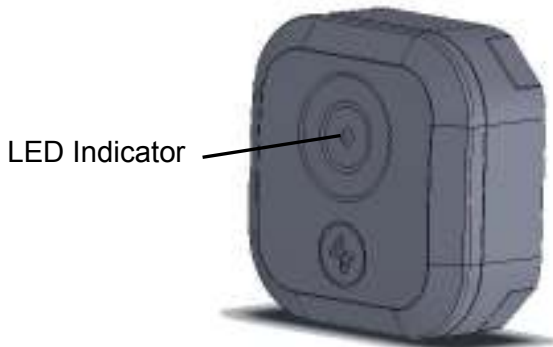

Activating the Asset Tracking tag:

The ATT is turned off by the manufacturer before shipment and must be activated before use. To activate, install the rear tamper plate onto the item that requires tracking. Click the ATT onto the rear tamper plate; the LED indicator flashes for 3 seconds indicating that the ATT has been activated successfully.

Once in active mode, the ATT sends a status message to the monitoring station (every 60 minutes) indicating the current battery status as well as the location of the ATT. This status message is sent until the ATT is deactivated.

Motion Alert:

When the ATT detects motion, it sends a transmission every 20 seconds. The ATT sends these transmissions until 2 minutes have expired without motion. After 2 motion-free minutes, the ATT returns to Rest mode.

Tamper Alert:

If the ATT is removed from the tracked item (i.e. it becomes separated from the rear tamper plate), a tamper signal shall be sent once every 20 seconds for a period of one hour. After an hour, if the ATT is still separated from the tracked item, a tamper signal shall be sent once every 60 minutes. After the ATT has been in a tamper condition for 12 hours, it shall automatically deactivate itself.

Deactivating the ATT:

Separate the ATT from its rear tamper plate. After 12 hours, the ATT deactivates itself automatically.

FCC Notices

Note: The following is applicable only to the 318MHz version of this product.

FCC ID: QUX-ATT-830

FEDERAL COMMUNICATIONS COMMISSION (FCC) Part 15 STATEMENT

The equipment complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:


(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna, 2. Increase the separation between the equipment and the receiver, 3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected, 4. Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by Elmo Tech Ltd could void the user's authority to operate the equipment.

In case of any problems please contact your local service provider:



HomeFree Systems Inc.

Phone: 1-800-606-0661

Outside US call: +927-3-7671900

E-mail: contactusa@homefreesys.com

Web Site: www.homfreesys.com