

**AUKEY**


User Manual  
Wireless Speaker

Thank you for purchasing the AUKEY SK-M33 Wireless Speaker. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.

## Package Contents

Wireless Speaker  
Micro-USB Cable  
3.5mm Audio Cable  
User Manual  
Warranty Card

## Product Diagram

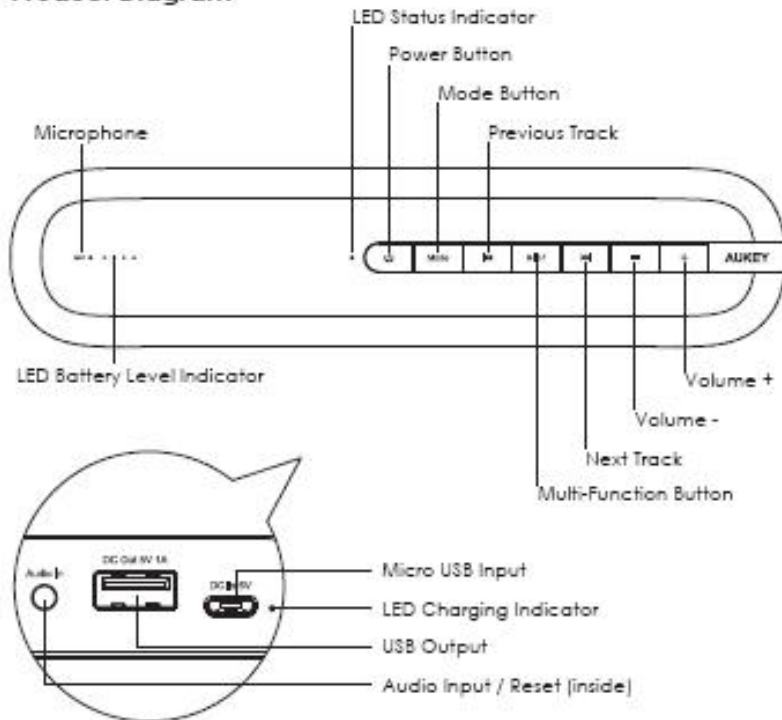


## Specifications

Model	SK-M33
Technology	BT 4.2, A2DP, AVRCP, HSP, HFP, DSP
Audio Output Power	2 x 10W (main drivers) + 15W (woofer)
Audio Drivers	Two 52mm main drivers, one 78mm woofer, two 75mm passive radiators
Frequency Response	60Hz - 18kHz
Signal-to-Noise Ratio	≥75dB
Micro-USB Input	DC 5V 1A
USB Output	DC 5V 1A
Charging Time	8 hours
Battery Life	18 hours (at 50% volume)
Battery Type	Li-ion (2 x 4000mAh)
Operating Range	Up to 10m / 33ft
Operating Temperature	-10°C - 50°C / 14°F - 122°F
Dimensions	252 x 122 x 58mm / 9.92" x 4.79" x 2.28"
Weight	1.35kg / 2.98lb

## Charging

Fully charge this speaker before first use. Connect it to a USB charger or charging port with the included micro-USB cable to charge. When the red LED indicator turns off, your speaker is fully charged and ready for use. Charging takes around 8 hours.

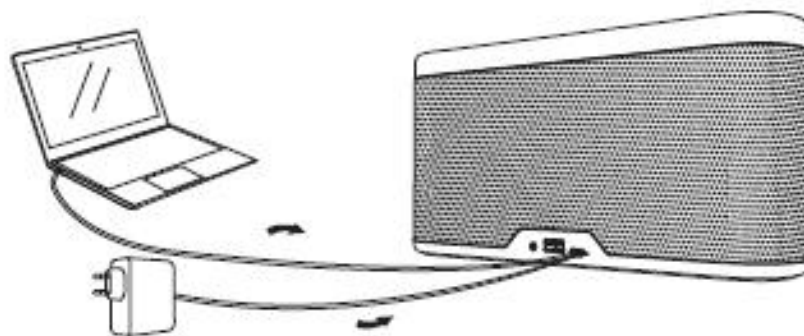

## Powering On / Off

- Press and hold the power button for 2 seconds, and the LED indicator will light up blue / turn off

## Pairing

1. When you turn on the speaker, it will automatically enter pairing mode and the LED indicator will start to flash blue rapidly
2. Activate the pairing function on your phone or other compatible device and select "AUKEY SK-M33"
3. If a code or pin is required for pairing, enter "0000"
4. When successfully paired, you will hear a tone and the LED indicator will stay blue

### Notes

- To reset the speaker (to clear program errors), use a straightened paper clip or a toothpick to carefully short-press the reset button (towards the top at the back, furthest inside the 3.5mm audio input jack)
- If your paired device is switched off or manually disconnected, the speaker will enter pairing mode
- If the speaker or connected device exceeds the operating range, the speaker will disconnect. The connection to the last successfully connected device will be re-established once you re-enter wireless range. To connect to other devices, repeat the previous "Pairing" steps
- The speaker will automatically shut down after 10 minutes if unpaired or unused

## Playing Audio via Audio Input Connection

Connect the SK-M33 to your PC, laptop, or other device with audio output port using the included 3.5mm audio cable. Press the power button to turn on, and the LED indicator will light up blue.

### Notes

- The speaker will disconnect from your phone or other paired devices when an audio cable is plugged into the audio input jack. Short-press the mode button to switch back to BT mode
- When playing audio using the audio input jack, press the volume + / - to adjust the volume and short-press multi-function button to mute/unmute. Next / previous track control on the speaker is disabled in audio input mode

- For some computers, you may need to access the audio control panel to manually set the speaker as the default audio device

### Charging Your Devices

- Connect one end of charging cable to device's charging port and the other end to the USB output port on the speaker
- Unplug your device when fully charged
- LED battery level indicator shows ranges: 0–25%, 26–50%, 51–75%, 76–100%

### Controls & LED Indicator

Functions	Instructions
Play or Pause	Short-press multi-function button
Adjust volume	Short-press volume + / -
Skip to next / previous track	Short-press next / previous track
Cancel pairing	When connected, press and hold mode button for 2 seconds
Answer or end a call	Short-press multi-function button
Reject an incoming call	Press and hold multi-function button for 2 seconds
Redial last-called number	Double-press multi-function button in standby

LED Indicator	Status
Blue flashing rapidly	Pairing mode
Solid blue	Connected
Blue flashing steadily	Playing music / In call / Audio input mode
Red on	Charging
Red off (after charging)	Fully charged

### warn

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.