

Wireless Computer Interface/Transceiver

Model CM19A

- Controls up to 256 lights, appliances, and/or cameras instantly from your PC, by remote control.
- Works with the TM751 Transceiver and X10 Modules (sold separately).
- Works with X10's PalmPad software (available from www.x10.com/software).
- Connects to your PC's USB port for easy installation.
- Up to 50 ft. range.

The CM19A Computer Interface sends Wireless Radio Frequency (RF) signals from your PC to a TM751 Transceiver. The Transceiver then passes the signals onto your house wiring to control lights, appliances, and/or X10 wireless cameras around your home. You plug lights and appliances into X10 Modules (sold separately). The CM19A is also a wireless receiver so you can tell your PC, from any X10 remote control, what cameras you want it to control.

1. Set the TM751 Transceiver to Housecode A. Plug a lamp or appliance into the TM751. Plug the TM751 into an AC outlet (use one near your PC for now).



2. Download the X10 PalmPad software from: www.x10.com/software.
3. Install the software as per its instructions. At the appropriate point you will be instructed to plug in the CM19A.




4. Plug the CM19A into your computer's USB port.
5. Follow the instructions to complete the installation.
6. Run the X10 PalmPad application.

A picture of an X10 PalmPad remote appears on your computer monitor. Use the on-screen remote control just like a regular remote control: Click on 1 to test the Transceiver. For more information right-click the PalmPad to access the extensive on-line help. You can also print labels from here to match those on the on-screen PalmPad remote and place them on a physical PalmPad (sold separately). You can also turn on or off sound effects that occur when you press buttons. Persons with physical disabilities who have software that can access their keyboard can simply "type" A 1 ON, for example, to turn on any X10 Module or wireless camera.

F.C.C. CAUTION - THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

NOTE: NO CHANGES OR MODIFICATIONS MAY BE MADE TO THE UNITS. ANY CHANGES MADE TO THE UNITS WILL VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

X10.com, a Div. of X10 Wireless Technology, Inc.
1-800-675-3044 sales@x10.com

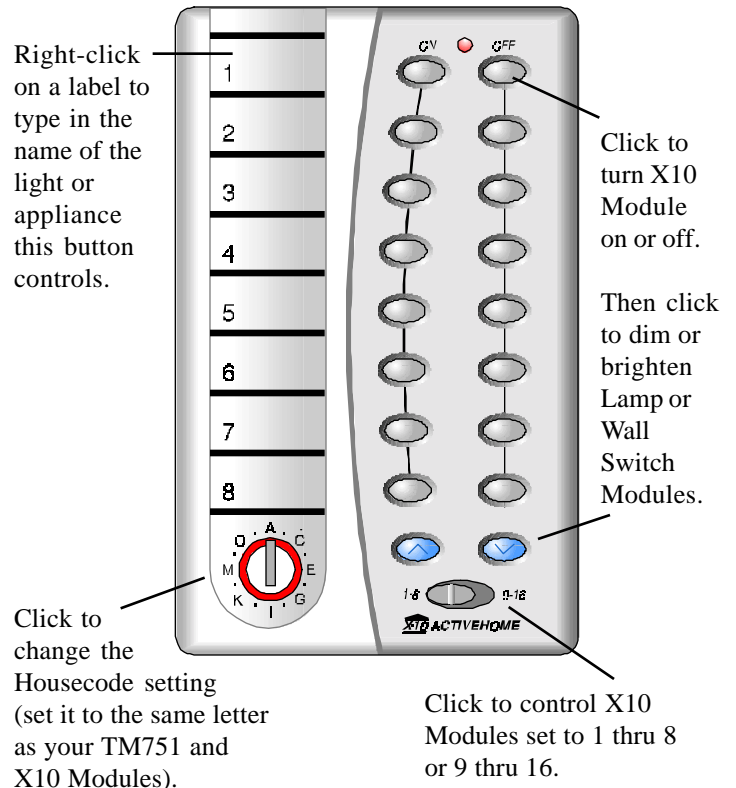

LIMITED 1-YEAR WARRANTY

X10.com, a divisions of X10 Wireless Technology, Inc. (X10) warrants X10 products to be free from defective material and workmanship for a period of one (1) year from the original date of purchase at retail. X10 agrees to repair or replace, at it's sole discretion, a defective X10 product if returned to X10 within the warranty period and with proof of purchase.

If service is required under this warranty:

1. Call 1-800-675-3044 or e-mail sales@x10.com for details on how to return your unit(s).
2. Enclose a check for \$4.00 for postage and handling.
3. Enclose a dated proof of purchase.
4. X10 is not responsible for shipping damage. Units to be returned should be packed carefully.
5. For additional warranty information, contact X10.

www.x10.com