


Avaya B179 SIP Conference Phone

The **Avaya B179** is a conference phone for IP telephony. A manual containing details of features and settings and an administrator's manual for advanced configurations are both available on our website: support.avaya.com.

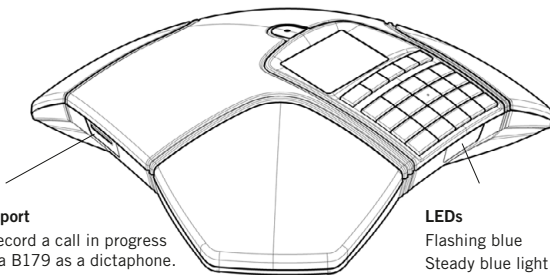

SD memory card port

It is possible to record a call in progress and use the Avaya B179 as a dictaphone.


Press the **•** **←** button to start and stop recording.

Recordings can be accessed via the menu.

LEDs

| | |
|-------------------|---|
| Flashing blue | Incoming call |
| Steady blue light | Call in progress |
| Flashing red | Hold, microphone and speaker turned off |
| Steady red light | Mute, microphone turned off |

Display symbols




In call mode

- Line free
- Line connected
- Line on hold
- Line (called party) busy
- Line put on hold by other party
- Recording call
- Secure connection

Before account name

- Telephone not registered
- Telephone registered

DESCRIPTION

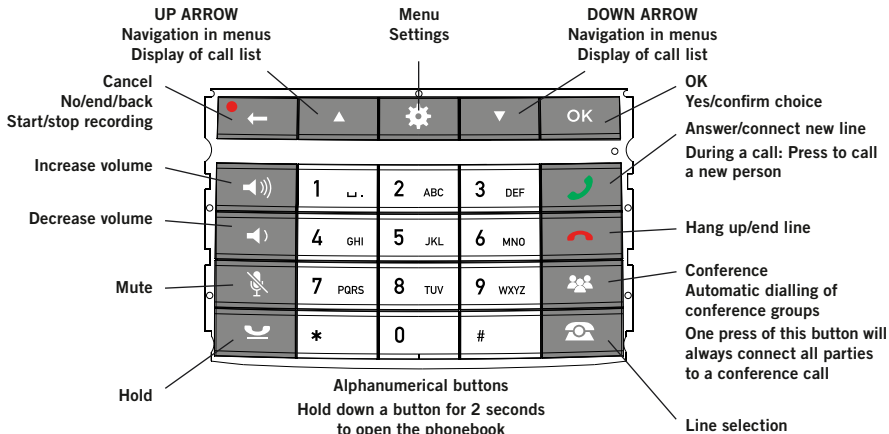

① Some Avaya B179 have a different keypad with other symbols. This does not affect the functions of the buttons.


NAVIGATE IN MENUS AND MAKE SETTINGS

The Avaya B179 menu contains the following options:

PROFILES
PHONE BOOK
EXT. PHONE BOOK
CONF GUIDE
RECORDING
SETTINGS
SYSTEM
STATUS

- ☛ The simplest way to make settings and edit contacts is using a PC and the Avaya B179 web interface. Please refer to the manual for details.
- ⇒ Press **☛**.
- ⇒ Select the option you want from the menu using the arrow keys. Press **OK** to confirm.
- ⇒ Cancel the setting or go back one level in the menu by pressing **☛**.
- ⇒ Quit the menu by pressing **☛** again.
- ⓘ Note that after you have made changes to a setting, you must press **OK** to activate the setting.
- ☛ It is possible to open a menu option directly by pressing the number button that corresponds to the position of the option in the menu.

CONNECTING

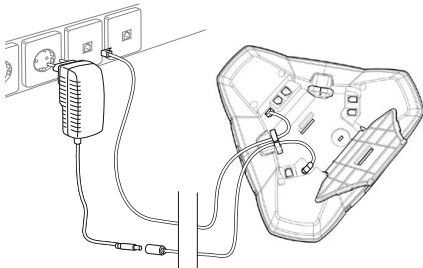

- ⇒ Connect the Avaya B179 to the network as illustrated above.
- ⇒ Plug the Avaya B179 into the mains using the power adapter as illustrated.
- ⓘ The Avaya B179 can be operated directly from the network (Power over Ethernet) if the network supports this.
- ⇒ Place the conference phone in the middle of the table.

INSTALLATION AND REGISTRATION

“Avaya B179 SIP Conference Phone, Installation and Administration Guide” explains how you obtain a network address, select the basic settings and register an SIP account.

ANSWERING AND MAKING CALLS


- ⇒ Press **⏪** to answer an incoming call.
- ⇒ Dial the number and press **⏪** to make a call.
- ⇒ Press an arrow key to open a call list containing previously dialed numbers. Call using **⏪**.
- ⇒ Press and hold an alphanumeric button for two seconds to call a contact in the phonebook.

DURING A CALL

- ⇒ Adjust the speaker volume using the keys **⏪**) and **⏩**.
- ⇒ Press **🔇** to turn off the microphone.
- ⇒ Press **🔇** to put the call on hold.
Both the microphone and the speaker are turned off and the call is on hold.
- ⇒ Press the same button again to reconnect the call.

MULTI-PARTY CALLS


ADDING A PARTY TO A CALL

⇒ Press  during the call to get a new dialling tone.

Calls in progress are put on hold.

⇒ Dial the new number.

① You can also press an arrow key to use the call list or use the menu to access the phonebook.



⇒ Press the  key to connect the calls.

THE CONFERENCE GUIDE

You can create groups via  > **CONF.**


GUIDE > ADD GROUP.

Making conference group calls

⇒ Press the  button and choose a conference group. Press **OK** if you want to see who is in the group and  to make the call.

The Avaya B179 dials all the contacts in the group.

The box in front of a person's name fills as soon as that person answers.




SWITCHING BETWEEN LINES


⇒ Press .

All lines are put on hold.


⇒ Press .


The line menu is displayed.



⇒ Mark a line in the line menu and press **OK** or .

The party is reconnected to the call.


⇒ Mark another line in the line menu and press  to switch to it or press **OK** to connect both the parties.

⇒ Press  to connect all parties to the call.

END LINE

⇒ Press .

The line menu is displayed.

⇒ Mark the line you want to end and press .