Caution:


This device complies with part15 of the FCC Rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note:


THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

STRUCTURE

CAMERA

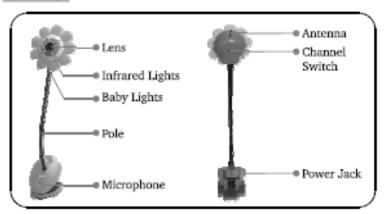

RECEIVER

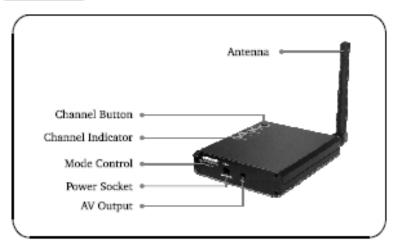

INSTALLATION

 Locate the camera to a specific position and then adjust it to a suitable angle.



2. Connect the adapter (DC 8V 200mA) to the camera.




Tip:

After the camera is powered on, touch the pole once with finger(s) to turn on the baby lights; touch one more time to turn off the lights.

3. Connect the antenna to the receiver.



Connect the receiver to a monitor/TV with AV cable (yellow for video and red for audio).



Connect the adapter (DC 8V 200mA) to the receiver and the channel indicator lights up.



6. Power on the monitor/TV and select AV mode.

