

CY600

2.4G FHSS Technology

6-Channel 2.4G Radio Control System

INSTRUCTION MANUAL

- Thank you for purchasing our R/C system.
- Before using, read this manual carefully.



CAUTION

To work your R/C with your models correctly and safely, read this manual carefully and keep it in a safe way as a reference introduction in the future.

Warning:

1. This product is only equipped for radio controlled models;
 2. The usage of this product should be approved by local relevant law or regulations;
 3. We will not be responsible for the damages caused by unauthorized modification, adjustment or replacement of parts of this product;
 4. The manual may be altered without prior notice. Please contact us if you have any corrections or clarifications that should be made in the manual.
- Before starting the transmitter, make sure the transmitter batteries are well loaded. The voltage of transmitter batteries is never lower than 8.6V. And please check and confirm that the servos are all well and properly connected.
 - Keep the radio system away from moist, high temperature and strong shake. Do not clean the product with solvent.
 - The antenna does not touch anything else when power switch is turned on. Do not leave this product and its accessories within the reach of small children.
 - Please use this product according to your local relevant law or regulation, we are not responsible for any incidents or damages.

2.4G Binding

1. The Binding processing

Turn on the transmitter, then connect the power of receiver keeping the receiver "BIND" button till the light turn on GREEN which means the binding is successful. After that, it's unnecessary to bind again.

Caution: make sure the RX and TX is within one meter, and around 10 meters no similar device.

If the light flashing, showing the binding failure, please do again as above indication.



Connection Diagram(For DELTA)

Switch	Switch1	Switch2	Switch3	Switch4	Switch5	Switch6
Reverse	Aileron Reverse	Elevator Reverse	Throttle Reverse	Rudder Reverse	Mode1 Mode2	Fixed-Wing Delta

Receiver channel distribution:

CH1: Aileron ; CH2: Elevator ; CH3: Throttle ; CH4: Rudder;



Switch to "DELTA" position and enter DELTA mode, aileron and elevator is mixed, as for triangle planes, tailless planes.

Transmitter	Receiver channel mixing	
Stick	Ch1	Ch2
Aileron Stick	+50%	+50%
Elevator Sticker	+50%	-50%

Connection Diagram(For FIXED-WING)

Switch to "FIXED-WING" position and enter Fixed-Wing Plane mode.

Switch	Switch1	Switch2	Switch3	Switch4	Switch5	Switch6
Reverse	Aileron Reverse	Elevator Reverse	Throttle Reverse	Rudder Reverse	Mode1 Mode2	Fixed-Wing Delta

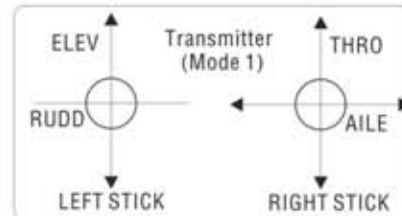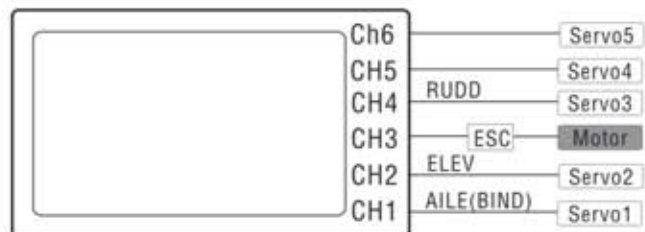

Receiver channel distribution:

- Ch1: Aileron
- Ch2: Elevator
- Ch3: Throttle
- Ch4: Rudder
- Ch5: Flap
- Ch6: AUX

Technology Data

Transmitter

CE 0678

Channels:6

Resolution:4096

Frequency:2.4GHz ISM Frequency range

Modulation:GFSK

Spread Spectrum Mode: FHSS

Number of frequency channels:20

Hopping rate:240 Jump / S

Output Power:<=20dBm

Working current:<=150mA

Working voltage:1.2Vx8 NiCad /NiMH

Dimensions: 189 mmX213mmX88mm

Net Weight: 410g

Receiver

Channel: 6

Frequency:2.4G ISM Frequency range

Spread spectrum mode:FHSS

Power: 4.5-5.5V/<30mA

Net weight:11g

Measurement: 40.4*26.4*13mm

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.