



SISTEMA DE RESPUESTA INMEDIATA

User Manual

User Guide

Copyright @ CEIEC

Version Number: V 1.0, 2014

Contents

THE PRODUCTS APPLICATION MANUAL	3
1. 1HARDWARE PRODUCT INTRODUCTION.....	3
1. 1. 1 EQUIPMENT MODULE AND PARAMETER LIST	3
1. 1. 2QUICK USE	5
1. 1. 2. 1THE DEVICE’ S OPENING	5
1. 1. 2. 2THE DEVICE’ S INITIATION.....	6
1. 1. 2. 3 THE UNFOLDING OF TOOL BOX	6
1. 1. 2. 4 THE REPLACEMENT OF HARD DISK	6
1. 1. 2. 5 THE REPLACEMENT OF BATTERY.....	7
1. 1. 3 THE INTRODUCTION OF APPEARANCE	7
1. 1. 4 THE PANEL DIAGRAM	9
1. 1. 5 THE LEFT-SIDE DIAGRAM	1
1. 1. 6, THE RIGHT-SIDE DIAGRAM.....	11
1. 1. 7THE BOTTOM DIAGRAM	11
1. 2THE SOFTWARE PRODUCT INTRODUCTION	12
1. 2. 1 THE REGISTERED ADMINISTRATOR USER.....	13
1. 2. 2 SYSTEM LOGIN	14
1. 2. 3 THE COLLECTION OF PERSONNEL INFORMATION.....	14
1. 2. 3. 1 THE COLLECTION OF PERSONNEL BASIC INFORMATION.....	14
1. 2. 3. 2 THE FOUR JOINT FINGERS.....	15
1. 2. 3. 2THE COLLECTION OF ROLLING FINGER-PRINT.....	18
1. 2. 3. 3THE COLLECTION OF PALM-PRINT.....	21
1. 2. 3. 4THE COLLECTION OF HUMAN IMAGE.....	24
1. 2. 3. 5 INFORMATION MANAGEMENT.....	26
1. 2. 3. 6USER MANAGEMENT	30
1. 2. 3. 7 THE IMPORT AND EXPORT CONTRAST DATA.....	31

THE PRODUCTS APPLICATION MANUAL

1.1 HARDWARE PRODUCT INTRODUCTION

1.1.1 EQUIPMENT MODULE AND PARAMETER LIST

No.	Equipment function	Parameter description
1	Solid portable computer	IntelCore2 i5 Ram: 8GB SanDisk memory HDD: SDSSDHP256G Solid state disk
2	The fingerprint collection device HX-P6322U	<p>Gathering Area 117mm×117mm</p> <p>Fingerprint Acquisition Area≥ 34.4 mm×34.4 mm;</p> <p>Fingerprint acquisition effectiveimagesize≥32.5 mm ×32.5 mm; Allow Error±0.4mm;</p> <p>Plane Palm-print Acquisition Effective Image Size≥117.0mm ×117.0 mm; Allow Error±0.4mm.</p> <p>Palm-print Acquisition Side Effective Image Size≥52.0 mm ×99.9 mm; Allow Error±0.4mm;</p> <p>The Three Face Stamped or Flat Press Fingerprint Image Acquisition Area: 640×640.</p> <p>The pixels of the image plane palm-print sampling number: 2304×2304 pixels.</p> <p>The number of image pixels side palm-print acquisition: 1024×1968 pixels;</p> <p>Plane palm-print image center 2100×2100 pixels within the region, the side of the palm-print image center 900×1800 pixels within the region, not with a diameter greater than or equal to 3 of a pixel defect; In any of the whole area of the image 600×600 pixels</p>

		<p>area diameter not larger than 2 pixel defects within no more than 10; Resolution 500dpi, 256gray-scale, acquisition rate: (The whole picture preview mode: 9 fps-A full picture of the high resolution mode: 4 fps; Rolling mode (ISO), 20fps-rolling mode (GA): 30-fps)</p>
3	Canon 100D Camera equipment	<p>Sensor type CMOS</p> <p>Sensor size 22.2*14.7mm</p> <p>Sensor descriptionlength-width ratio: 3:2</p> <p>Dust elimination: Add dust data</p> <p>The max pixel 12.6 million</p> <p>The effective pixel 12 million</p> <p>Triple optical zoom</p> <p>Image processor DIGIC 4</p> <p>The max resolution ratio 4272*2848</p> <p>Image resolution L (large): around 12.2 million pixel (4272*2848)</p> <p>M (middle): around 6.3 million pixel(3088*2056)</p> <p>S1 (small 1): around 3.4 million pixel(2256*1504)</p> <p>S2 (small2): around 2.5 million pixel (1920*1280)</p> <p>S3 (small 3): around 0.35 million pixel (720*480)</p> <p>RAW: around 12.2 million pixel (4272*2848)</p> <p>High-definition camera HD (720P)</p> <p>Camera lens instruction Lens model: EF-S 18-55mm f/3.5-5.6 IS II</p> <p>Actual focal length: f=18-55mm</p> <p>Display screen size is 2.7 inch</p> <p>Display screen pixel is 0.25 million pixel LCD, level 7 manual brightness control</p>
4	Barcode scanner	Support infrared automatic induction and command control

		Support RS232, USB HID, USB virtual serial port Shell solid and firm, dust-proof, sealing grade IP50 small size, convenient to embed: 4.6×4.2×2.1 (cm ³)
5	The power adapter (including AC line)	1.Power access interface number:1 2.USB interface number: 7 3.Network interface number: 1
6	LCD	17.3 inch high LCD screens Length-width ratio: 16: 9; The max resolution: 1920x1080。
7	Other accessories	Built-in keyboard, wireless mouse, sound card, microphone, 10/100M adaptive network card
9	Battery	Built-in replaceable lithium ion battery; Specifications: 11.1V/8800mAh; Sustainable work about 4 hours.

1.1.2 QUICK USE

1.1.2.1 The device's opening

As shown in figure below, push the button right to the direction of unlock mark, and open upward the shell.

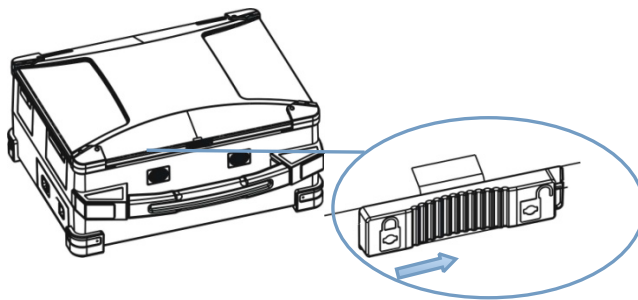


Figure 1-1 the device's opening

1.1.2.2 The device's initiation

Press down the starting button as figure below.

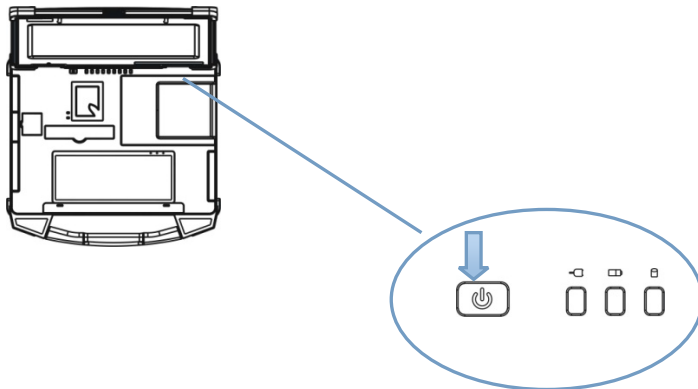


Figure 1-2 the initiation of device

1.1.2.3 The unfolding of tool box

After press left and right, pull out the tool box

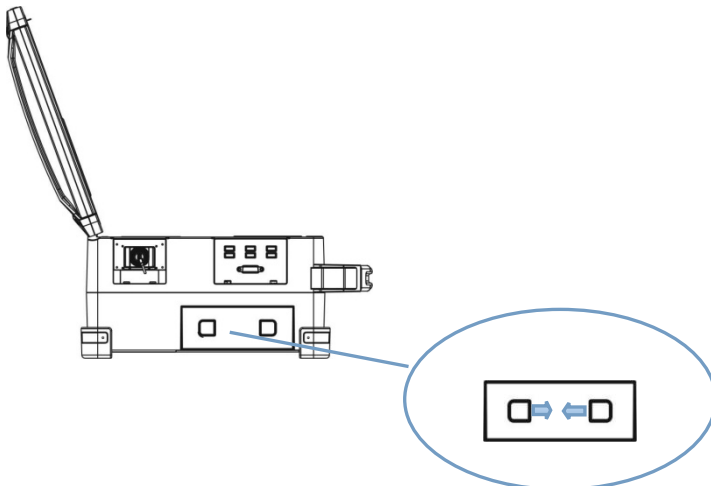


Figure 1-3 open the tool box

1.1.2.4 The replacement of hard disk

In turn, open the bottom cover, take out the tool box, open up the hard disk cover, and replace the hard disk.

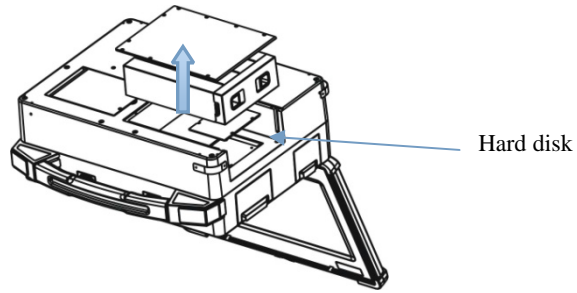


Figure 1-4 replace the hard disk

1.1.2.5 The replacement of battery

Pull down the screw, and take out the battery.

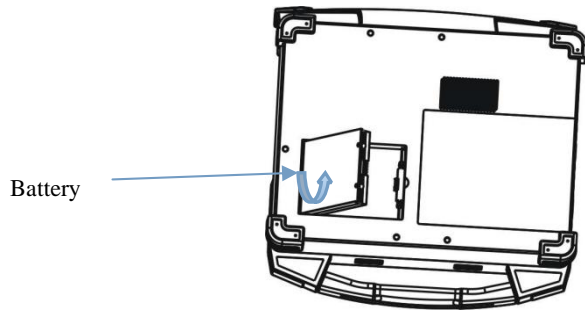


Figure 1-5 replace battery

1.1.3The introduction of appearance

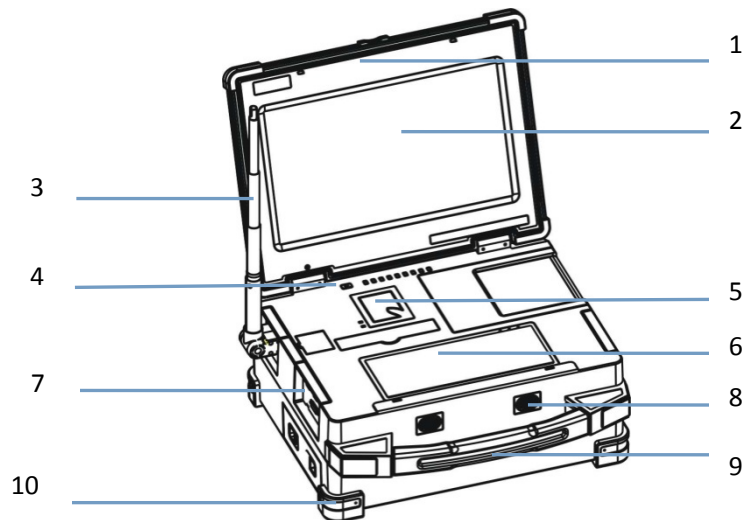


Figure 2-1 the positive diagram

1, Equipment shell

It is applied with high strength plastic materials, sturdy and durable.

2, 17.3 inch high definition LCD screens

Length-width ratio: 16:9;

The max resolution: 1920x1080.

3, the hidden camera pulling rod & camera interface

Scalable, the maximum pulling can reach 55 cm length;

Camera interface: applied with USB2.0 interface, can be connected with high pixel digital camera, and realize quick capture entering.

4, the key of starting

Starting device and awaking device, with blue light indicator;

Normal lighting: refers to in the operation, at this moment press button about 1 second, the system can automatically be shut down; long press 3 or 4 seconds, it will be forced to shut down;

Slow flashing: it means the device gets into the sleep state, at this moment press button about 1 second, it can awake the device; flashing: it means the device gets into the sleep state, at this moment press button about 1 second, it can awake the device;

Lighting off: it means device is shutdown or enter the standby mode, at this moment press button about 1 second, it can initiate device.

5, the multi-functions collection area

This area, as main functional area, is integrated with Bluetooth (built-in), barcode recognition, palm print collection device.

6, the keyboard area

Embedded with small laptop keyboard

7, the left-side application interface

USB interface.

8, the loudspeaker

The built-in double speaker with 8 ohm and 2w

9, the handle

The device handles

10, the equipment rubber gasket

The each corner of device (four corners of up and down) has one rubber gasket, a total of eight, has function of buffering force impact and prevention against slippery effect.

1.1.4 The Panel diagram

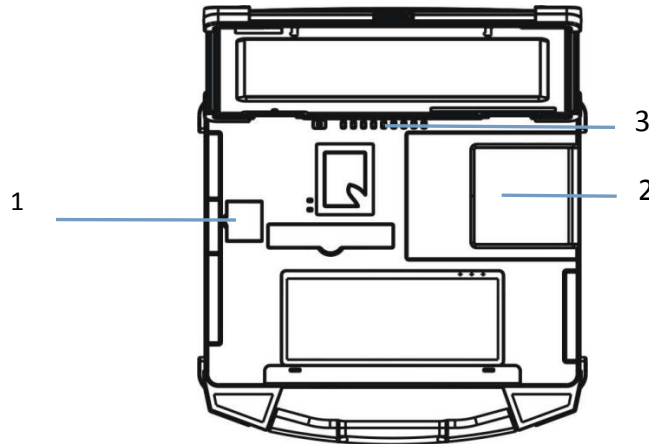


Figure 4-1 the panel diagram

1, Barcode gun scanning area

Used to scan the barcode


2, Palm print instrument collecting area

It is used to collect fingerprints, rolling fingerprints, four joint fingers, plane palm-print and lateral palm-print and other information.

3, Equipment work indicating light




Figure 4-2 working indication light

➤ The external power supply and charging indicator light 



On: means battery is in charging or by external power supply;

Off: means battery has completed charging or unconnected with external power supply.

➤ Battery power indicator light 

On: means power supply by battery;

Off: means no power supply by battery.

- Hard disk data reading indicator light 
Flashing: means data in reading
- The blue tooth communication work instructions  (*)
On: means the Bluetooth communication module is in normal work;
Off: means the Bluetooth communication module is shutdown.

1.1.5 The left-side diagram

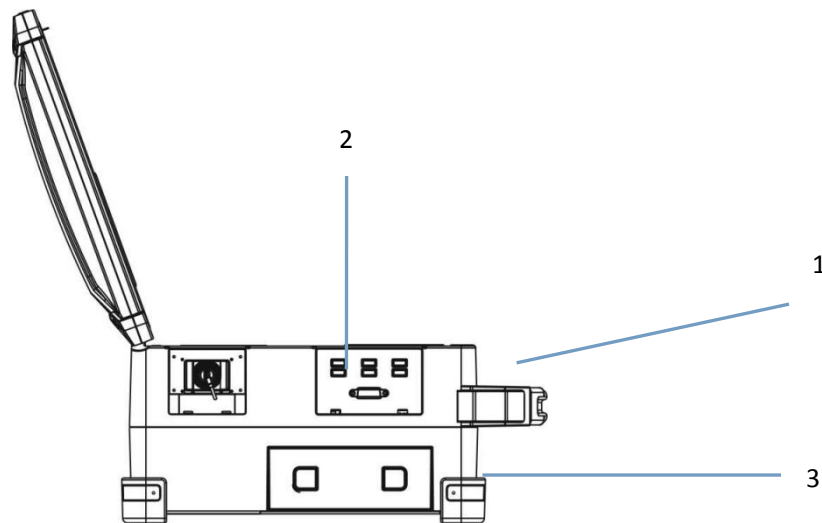


Figure 5-1 the left-side diagram

1, USBinterface 

USB 2.0 x 6 access, generally used in external USB device, USB data memory device or USB detection interface.

2, Camera rod storage room

Drawer-type design

3, the tool box

Drawer-type design tool storage box can store the power adapter, mouse, etc.

1.1.6, the right-side diagram

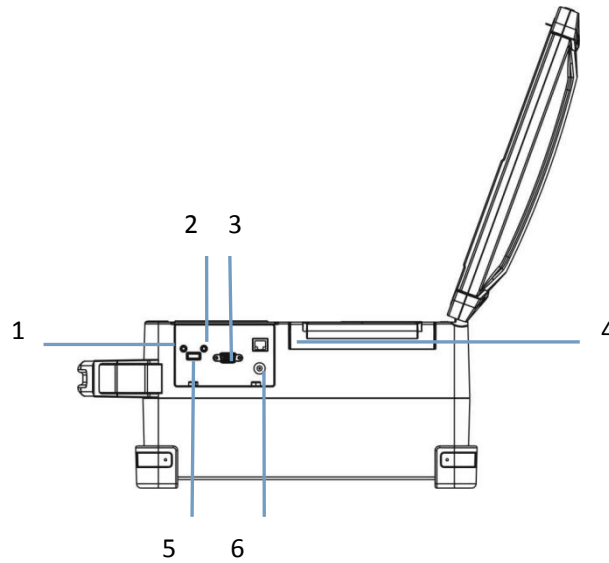








Figure 6-1 the right-side diagram of box outside

- 1, 3.5MM stereo audio output access 
- 2, 3.5MM microphone input access 
- 3, VGA interface 
- 4, Network interface 
- 5, USB interface 
- 6, USB (Universal Serial Bus) interface: available to devices of USB 2.0 or USB 1.1 norms; connect to wireless mouse upon this device.
- 7, the adapter power supply entrance access and rubber plug 
- 8, used to access external adapter power supply or internal battery charging;
- 9, Size: DC 19V/4.74A.

1.1.7The bottom diagram

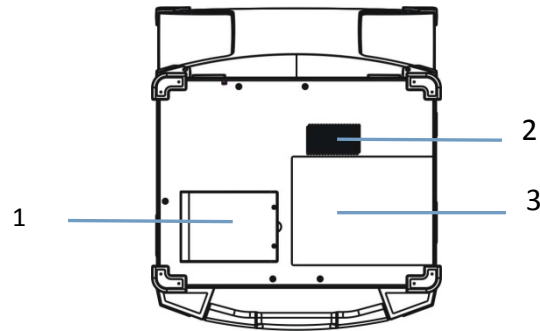


Figure 7-1 the bottom diagram

1, Battery

The built-in replaceable lithium ion battery;

Size: 11.1V/8800mAh;

The sustainable work about 4 hours

2, Air inlet

Note: Please don't jam inlet, and ensure good ventilation.

3, the room of hard disk replacement

The built-in replaceable hard disk;

Suitable for SATA interface of 2.5 inch hard disk.

1.2 THE SOFTWARE PRODUCT INTRODUCTION

1. This product is composed of six components: product activation, the starting of collection, data export, data back, import contrast data (as shown in figure 1.1.1).

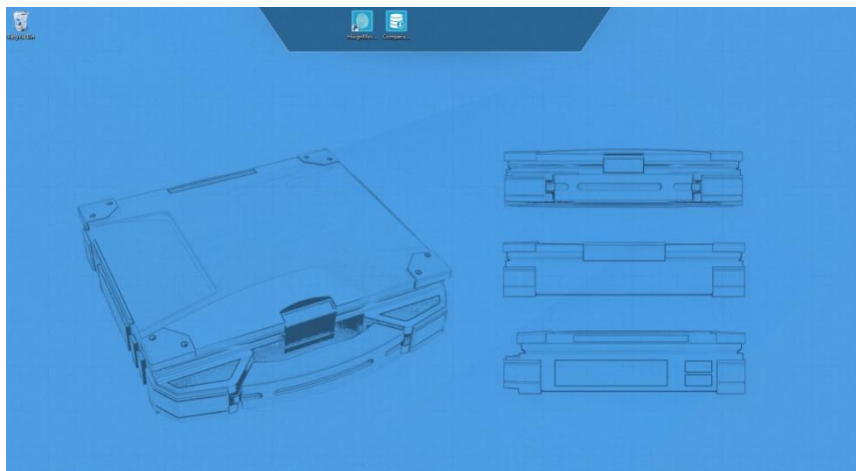


Figure 1.1.1

1. Activate registration: when it is first time to use, the product is needed to authorized and activated. Only after successful authorization and activation of the product, the other product functions can be normally used. It just needs to carry out such an operation for one time.
2. Starting collection: the main functions of product are concentrated in the collection part, which includes the staff basic information input, finger-print input, palm-print input, human image collection, body surface collection, electronic information, user management, information management and data submission and other functions.
3. Data export: directly open all stored export FID file, in order to be convenient for quick search.
4. The import and export of comparison data: be connected with FTP remote server (configuration needed), the data in the remote server is imported to local comparison database, as a database of local alignment.

1.2.1 The registered administrator user

1. The registration administrator user interface (as figure 3.1.1)。



Para el primer uso de este producto, registre el usuario administrador ✕

El administrador puede gestionar los usuarios de este sistema

Nombre de usuario

Contraseña

Contraseña confirmada

Registrar Salir

Figure 3.1.1

2. Enter the user name, code, click [register], and enter to system login interface.

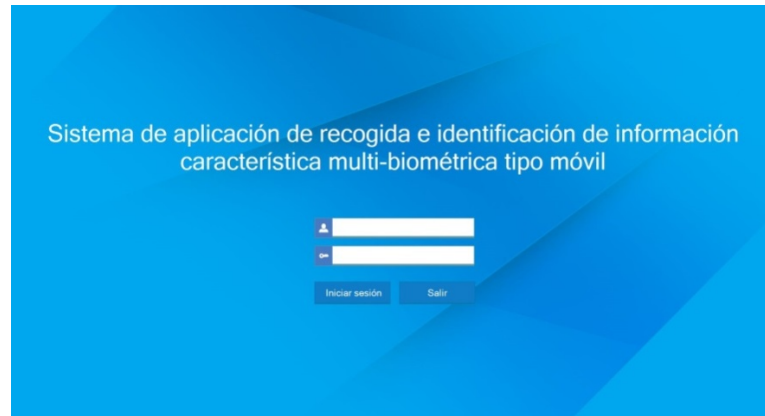


Figure3.2.1

1.2.2 System login

1. In figure 3.2.1 enter user name and password, click [login], and enter to the first interface of system (as shown in figure 4.1.1).

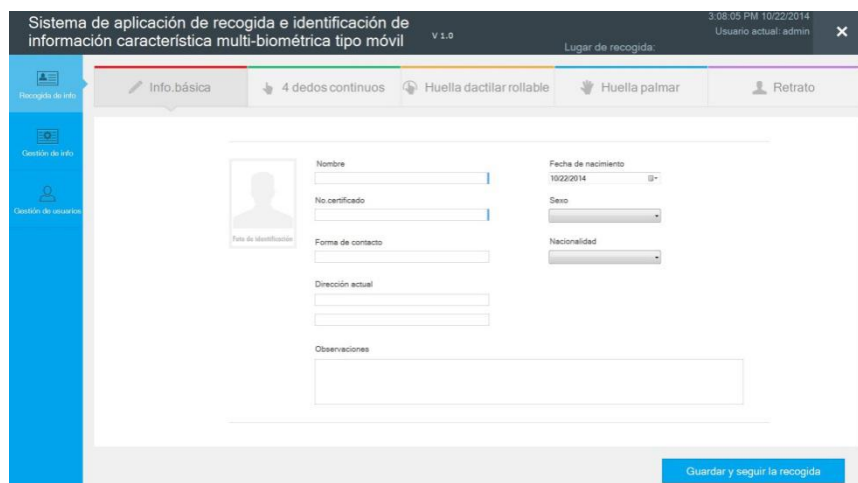


Figure 4.1.1

1.2.3 THE COLLECTION OF PERSONNEL INFORMATION

1.2.3.1 The collection of personnel basic information

- 1, Enter to the first interface of system, and shows directly the basic information interface (as shown in figure 5.1.1.1).

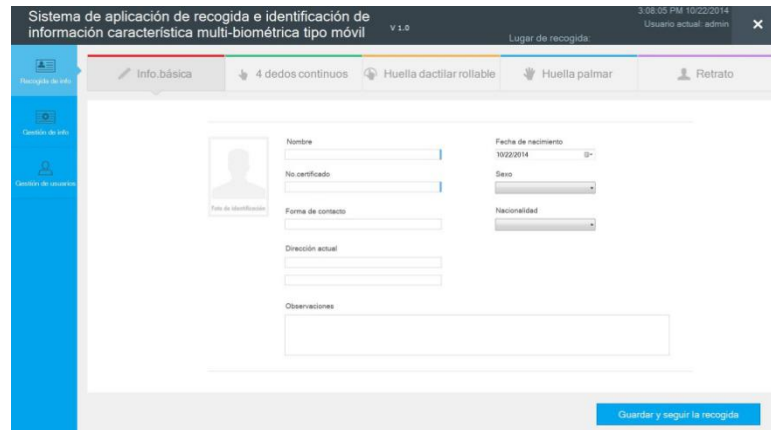


Figure5.1.1.1


2, on the personnel basic information interface, it can directly use the barcode scanning gun to read the DNA code.

[Note]

Basic information interface, the input box with blue marking is required to fill in.

1.2.3.2 The four joint fingers

1, after collection of personnel basic information,

clicks ; enter to the four joint finger collection interfaces.

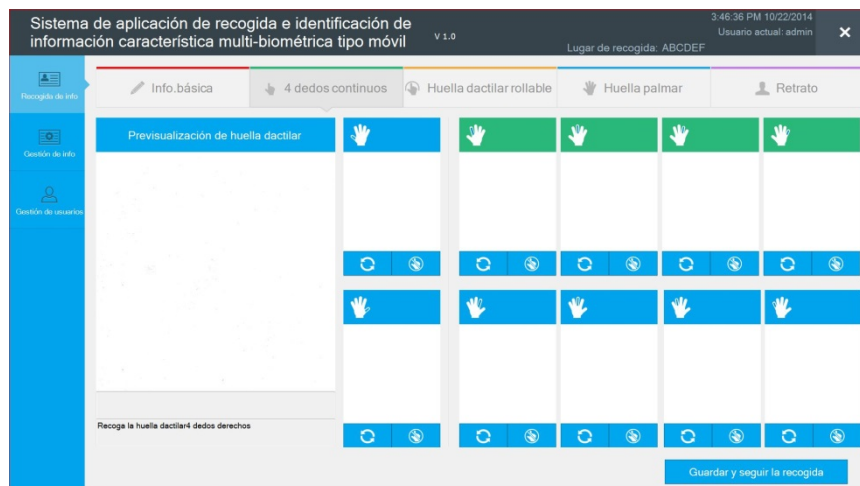


Figure 5.2.1.1

2, Collection of four joint fingers: according to the instruction of the icon, the four joint fingers of right hand are given priority to collect with finger-print, which the green frame is for the current collection finger position.

3. When collection of four joint fingers, the four fingers must be together and put on the middle of collection area. After collection, system will automatically indicate if the collection of four fingers is qualified. If qualified, the relevant finger position frame will become blue, and then continue to collect the four finger-print of left hand. After collection, it will collect the both thumbs finger-print.

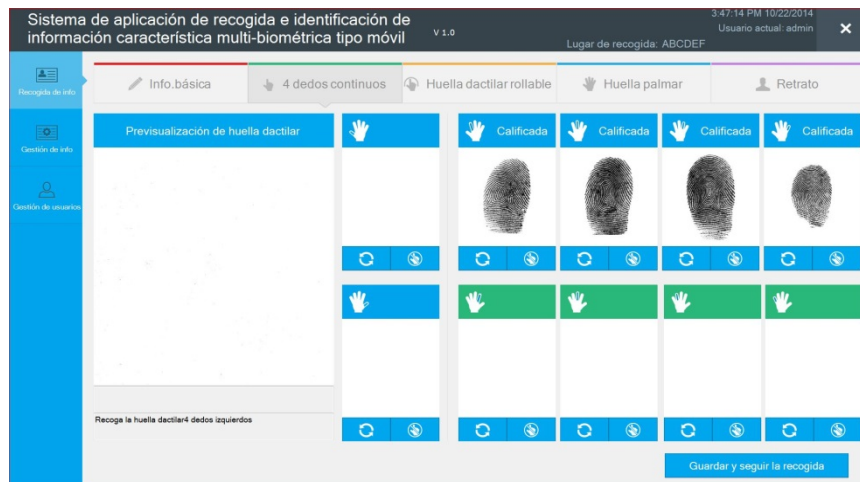


Figure 5.2.3.1

4. Because other reasons, it leads to the finger-print collection is not qualified; the system will provide the reason after one collection of non-qualification (as shown in figure 5.2.4.1).

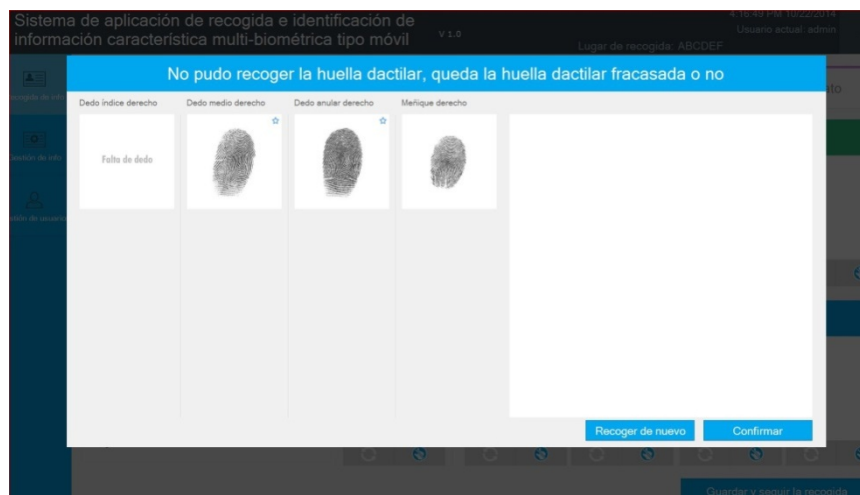



Figure 5.2.4.1

For failure collection of will list separately the result of collection, which with the star mark  is qualified finger-print, and which without the

start is not qualified finger-print. It can refer to selection way as finger 5.2.4.1.

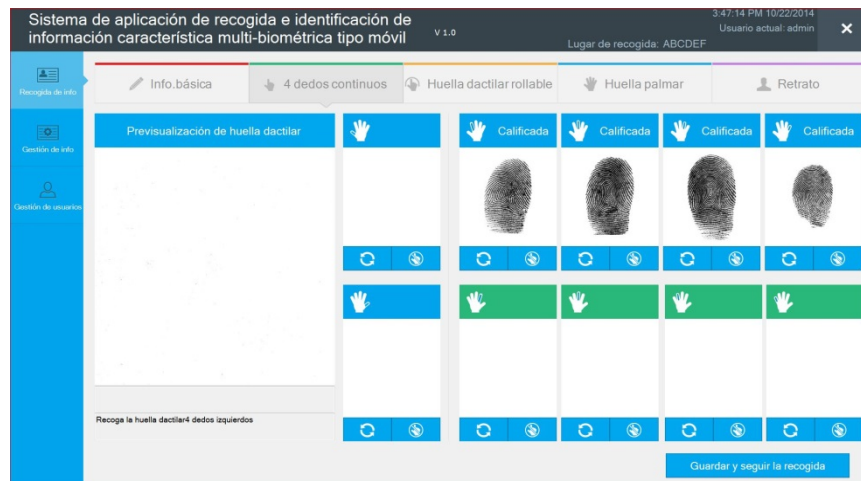




Figure 5.2.4.3

Also can click “re-collection” button, and return to four joint finger-print collection interface, and re-collect.

5. After collection of four finger-print of left and right hands, it is to collect both thumbs.

Both the thumbs of left and right hands are required to press down, system will automatically indicate if the both collected thumbs are qualified

6. In the four finger-print of left and right hands, it is to click any button , the corresponding three other fingers-prints are in the state of waiting for collection. Both thumbs are same logic, to click one button of them, the finger-print at both thumbs position become in the state of waiting for collection.

7. When the collected person lacks of finger, it is to click , and set this finger position as lack of finger (as shown in figure 5.2.7.1)

8. After collection of four joint fingers, the effect of finger-print are shown as diagram (as shown in figure 5.2.8.1).

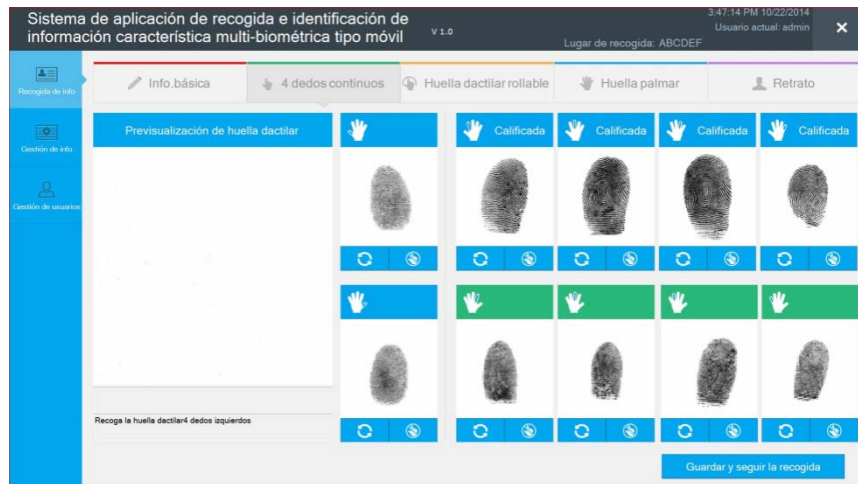



Figure 5.2.8.1

1.2.3.2 The collection of rolling finger-print

1. After collection of four joint fingers, it is to click  and enter to rolling finger-print collection interface (as shown in figure 5.3.1.1).

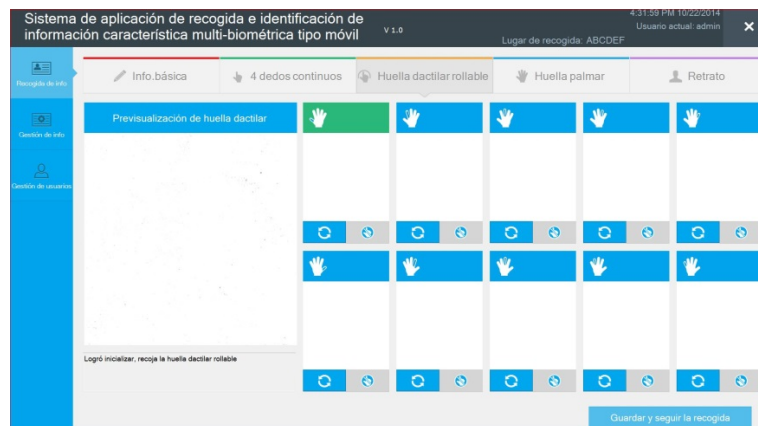


Figure 5.3.1.1

2. The collected rolling finger-print in the interface as shown in figure 5.3.1.1, according to diagram indication, it is to collect from thumb of right hand. The green frame is current awaiting collection finger position. If it collects the thumb of right, the diagram indicates (as shown in figure 5.3.2.1).

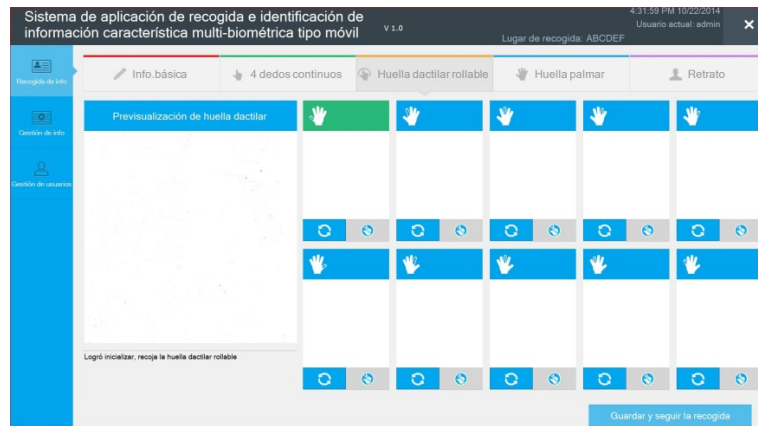


Figure 5.3.2.1

[Note]

When performing rolling fingerprint collection, it is first to put finger on the finger-print collection area according with a short delay; when the preview window appears the part of finger-print, it is to roll your finger as clockwise (or counterclockwise) (if urgent rolling of finger, it may lead to incomplete collection of finger-print)

3. When the thumb of right hand collection is completed, system will automatically evaluate the quality of finger-print. If finger-print is qualified, it will change the finger position frame of successful collection to blue color. This finger position upper right corner will display rating grade (excellent, good, qualified), and then automatically jump to the next finger position for collection until all the ten fingers collection has been completed totally. The collected finger-print effect is as shown (Figure 5.3.3.1)

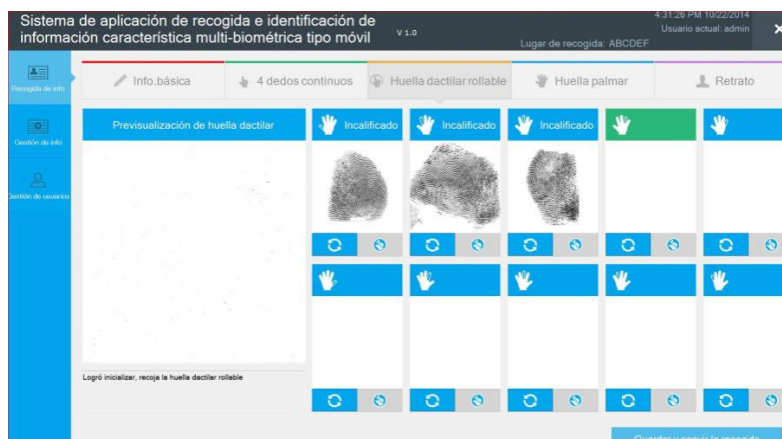




Figure 5.3.3.1

4. Because other reasons, it leads to the collected personnel's finger-print collection is not qualified, the system will indicate the reason of unqualified collection after unqualified collection.

click **Recoger de nuevo**, it re-collect finger-print.

5. When collected person is lack of finger, click ; it can set this finger position as a lack of finger.

Rolling finger-print interface, at the collected finger position is to click ; it can re-collect the finger-print.

6. The effect of collected rolling finger-print as shown in figure (as shown in figure5.3.6.1).

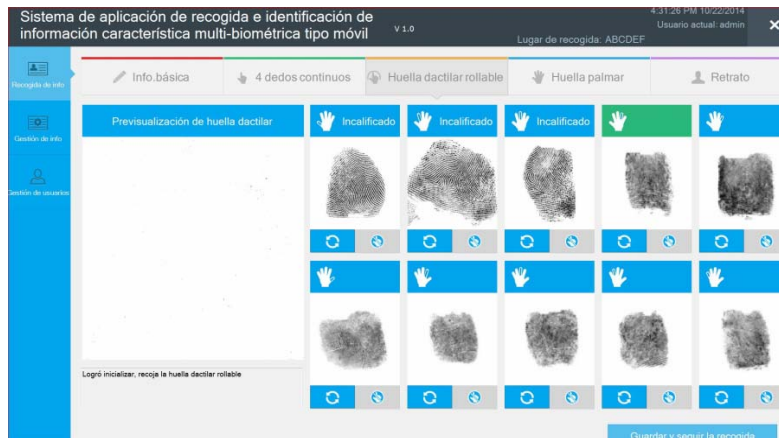


Figure5.3.6.1

7. The rolling finger-print consistency checking must be performed after four joint fingers-print collections, and in this case, the rolling finger-print collection can perform the consistency checking on the same finger position. If there is any inconsistency, it will indicate “the current collected finger-print doesn't match with the corresponding plane finger-print, please press again”. If the collection of rolling finger-print is first performed, when collection of four joint fingers is conducted, it will not perform consistency checking.

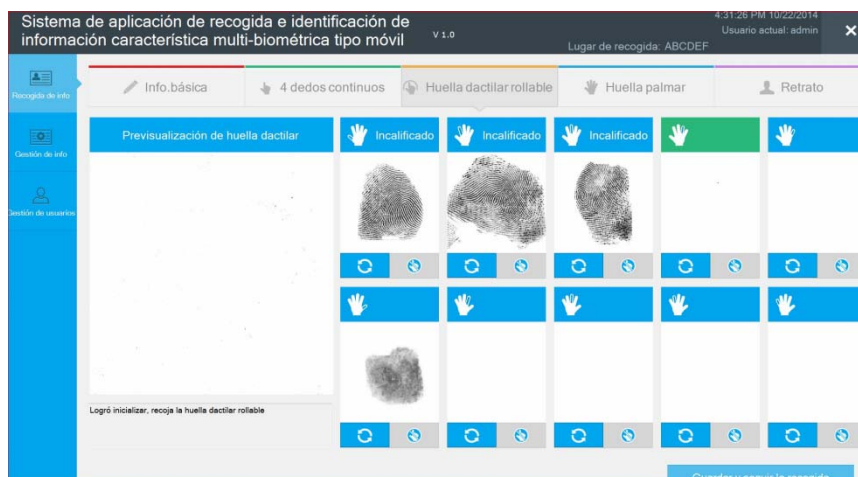




Figure5.3.7.1

8. In the figure 5.3.7.1, the lack of finger icon is unavailable with gray , it is because this finger of four joint fingers collection has been done. In rolling finger-print, it can't allow to set as a lack of finger. If in four joint fingers, it is to set one of four finger position as a lack of finger; when it is shift to rolling finger-print collection page, the corresponding finger position will be automatically set as a lack of finger.

[Note] Such as it will not perform a consistency checking when it is first to collect the rolling finger-print.

1.2.3.3 The collection of palm-print

1. After completion of collection of rolling finger-print, it is to click , and enter to palm collection interface, according to icon indication, the collection order is: the positive palm of right hand, the lateral palm of right hand, the positive palm of left hand, and the lateral palm of left hand; among them, the one with green frame is current awaiting collection palm-print, after completion of palm-print collection, it will change to blue (as shown in figure 5.4.1.1).

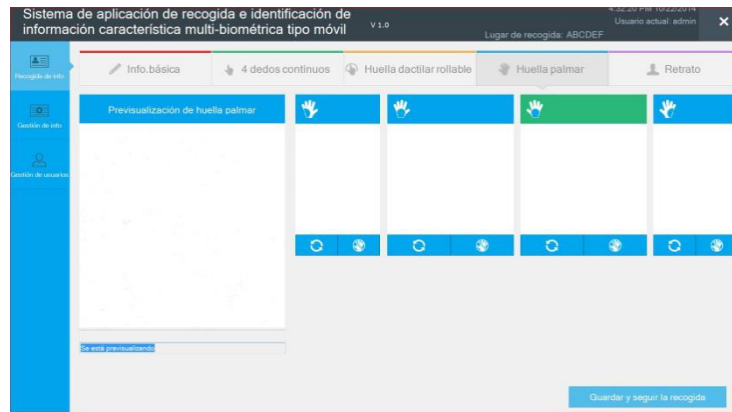


Figure5.4.1.1

2. When the positive palm is collected, it is to put the positive palm on the collecting instrument. After calibration of palm-print and collection instrument light if off, you can remove your palm. System will automatically evaluate the quality of palm-print. When collection quality is qualified, the collection of palm-print will automatically display the palm position; the effect of collected positive palm is as shown in figure (as shown in figure 5.4.1.2)

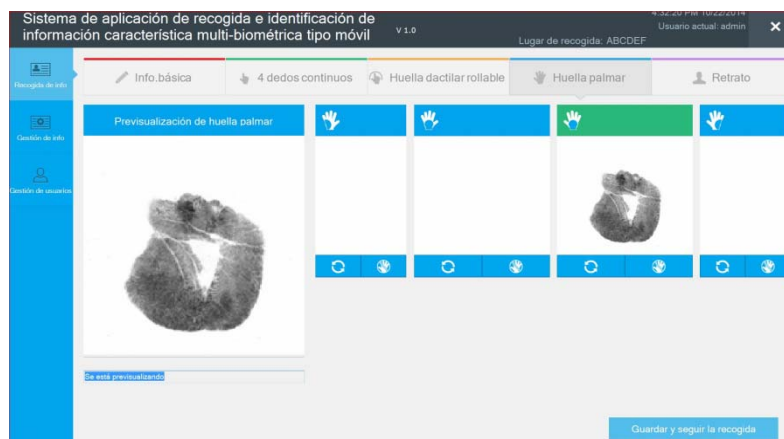


Figure5.4.1.2

3. When the lateral palm is collected, it is to put the lateral palm on the collecting instrument. After calibration of palm-print and put your hand lateral on the light place; when collection instrument light if off, you can remove your palm. System will automatically evaluate the quality of lateral palm-print. When collection quality is qualified, the collection of palm-print will automatically display the palm position; the effect of collected lateral palm is as shown in figure (as shown in figure 5.4.3.1)

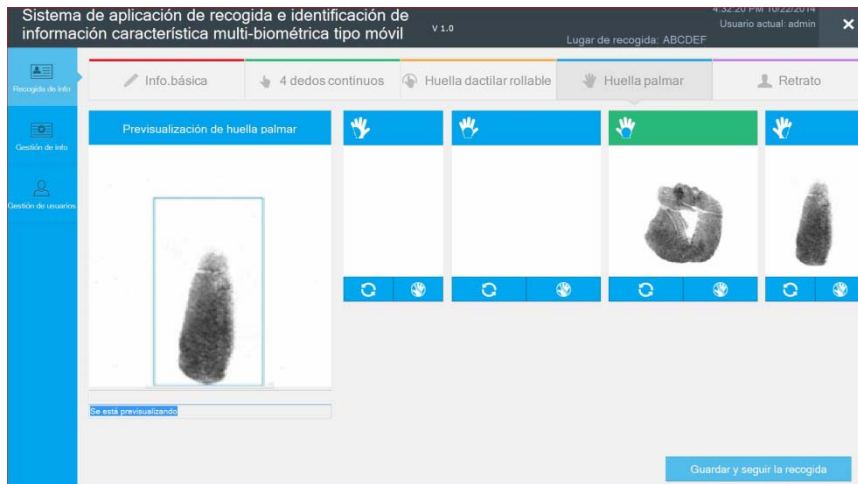


Figure5.4.3.1


3. Because other reason, it leads to the collected person palm-print collection is unqualified, the system will remind the reason of unqualified collection (as shown in figure 5.4.4.1).




Figure5.4.4.1

Click [OK], return to palm-print collection interface, this palm position displays as unqualified.



In figure 5.4.4.1, click [re-collection], it can re-collect this palm-print.

5. When the collected person is a lack of palm, it is to click ; it can set this palm position as a lack of palm.

In the palm-print collection interface, it is to click ; it can re-collect the palm-print.

1.2.3.4 The collection of Human image

1. Before startup of the program, it is to connect the camera equipment (Canon 100D), and keep camera in the state of photographing.

2. After collection of palm-print, it is to click , and enter to Human image interface, the system is in the state of preview, and collection order is positive portrait, the left side of portrait, and the right side of portrait, and click , adjust the frame to the appropriate size, it is to click [OK] or double-click on the border of frame to cut portrait, and the system will automatically evaluate the quality of photo collection, in order to ensure that user can collect the qualified picture. (As shown in figure 5.5.2.1).

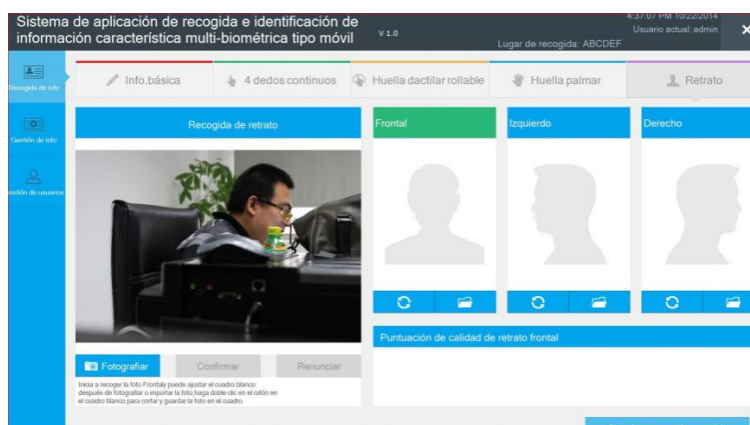





Figure 5.5.2.1

[Note]

In the figure 5.5.2.1, if unsatisfied with collection of human image, it is to click , and return to the preview state, and re-collect human image.

In the process of Human image collection and after collection of human image, it is not favorable to close the Canon camera (Such as if closed, it may lead to send wrong message when shifting other interface), therefore it can firstly shift to other interface or close the camera after saved.

3, it can use  export the pictures made in advance to the system, and

click  button (as shown in figure 5.5.3.1), and find the required photos in the “open” dialog box (as shown in figure 5.5.3.2). By using mouse, it is to select face location, within the scope of the white box is to double-click the left button of mouse or click [ok] to import this to the system (as shown in figure 5.5.3.3).

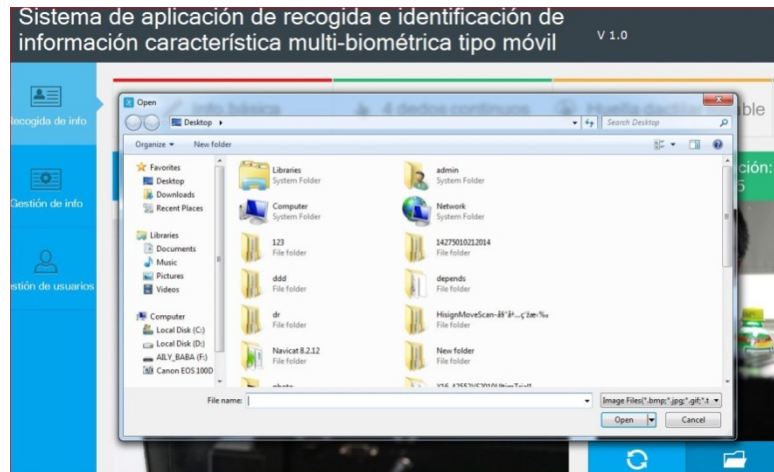




Figure 5.5.3.1



Figure 5.5.3.2

In figure 5.5.3.2, if unsatisfied with import photos, it is to click  , and can re-import photos.

4. When collecting the positive portrait, because of other reasons, it leads to the human image of collected person is not qualified, the system will provide unqualified reason after consecutive unqualified collections. In the right fills in the failure reason, and click  , and return human image interface; the composite score is unqualified.

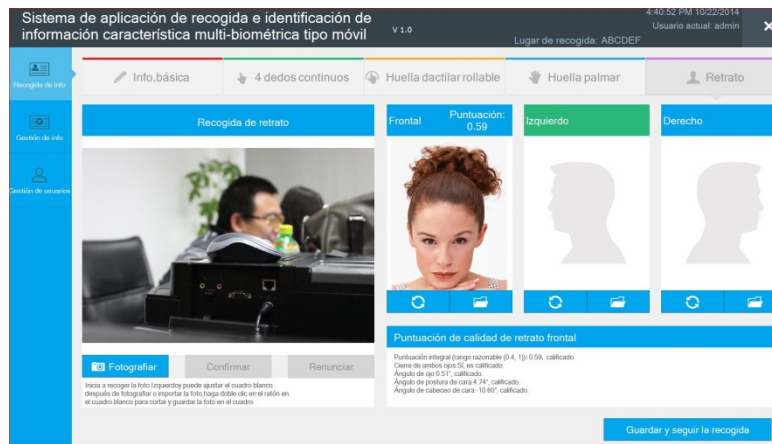


Figure5.5.4.3

In the figure 5.5.4.2, it is to click **Recoger de nuevo**, and re-collect the positive portrait.

5. Such as the photo collection quality is unqualified, it needs to re-collect, click below the human image corresponding position; it can immediately perform recollection.

[Note]

When the import photo size is smaller than set size, the system will indicate “import photo is too small”; it is to click [OK], and re-import photo. The import image pixel should be larger than 450*600

1.2.3.5 Information management

1. It is to click the information management module, and enter the information management page. (As shown in 6.1.1)

No serie de personal	Nombre de personal	Sexo	No certificado	Tiempo de recogida	Comparación de huella dactilar	Comparación de huella palmar	Comparación de retrato
0012014100004	eee			10/22/2014	Datos incomplet...	Datos incomplet...	Ver los resultad...
0012014100003	tanbo chen	Masculino	1101081984060557...	10/22/2014	Datos incomplet...	Datos incomplet...	Datos incomplet...
0012014100002	bing2			10/21/2014	Comparación	Ver los resultad...	Ver los resultad...
0012014100001	bing1			10/21/2014	Comparación	Ver los resultad...	Ver los resultad...

Figure6.1.1

2. It is to choose an incomplete data and click the edit button to enter into the edit page. The edit page and information collection page should be

consistent. (As shown in figure 6.2.1)

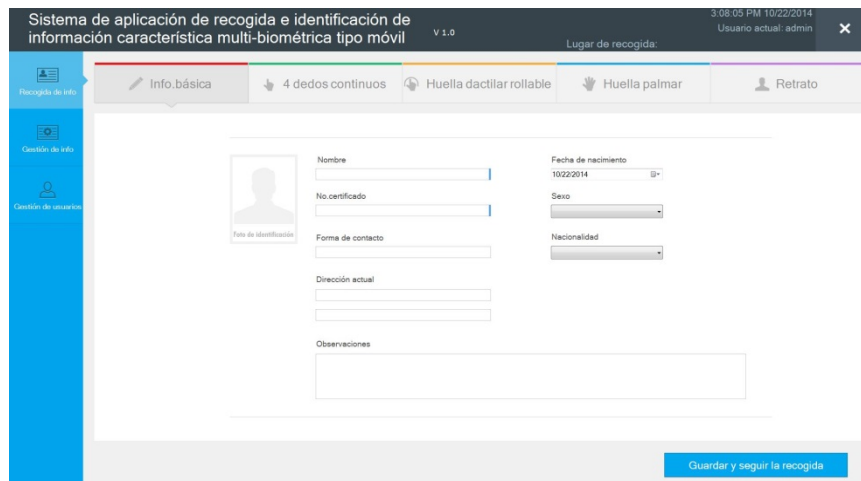



Figure6.2.1

3.It is to choose a data, and click the delete button to delete the selected data.

4.The collection information search interfaces; for search of collected information, it can input anyone item or several items information from “staff number”, “staff name”, “ID number”, “collection time” and click search. If there is no relevant information, the list is empty. If it has, it will display in the list.

5.In the figure 6.4.1, it is to click  , and all collected information will be displayed.

6.In the figure 6.4.1, it is to click “staff number”, the information will be displayed in the preview interface (as shown in figure 6.6.1).



Figure6.6.1


7. It is to choose a complete collected data of finger-print, and click “comparison” in the finger-print contrast list, and pop up comparison result search page (as shown in figure 6.7.1).



Figure6.7.1

8. It is to choose a complete data of palm-print collection, and click “view the comparison result” in the comparison list of palm-print, if data has not compared, the comparison information will be blank on the result page; otherwise the comparison information list shows the comparison result data.

9. It is to choose a complete data of human image collection, and click “view the comparison result” in the comparison list of human image, if data has not compared, the comparison information will be blank on the result page; otherwise the comparison information list shows the comparison result data.

10. It is to click  button on the page, and import the information management data to the Excel. (As shown in figure 6.10.1).

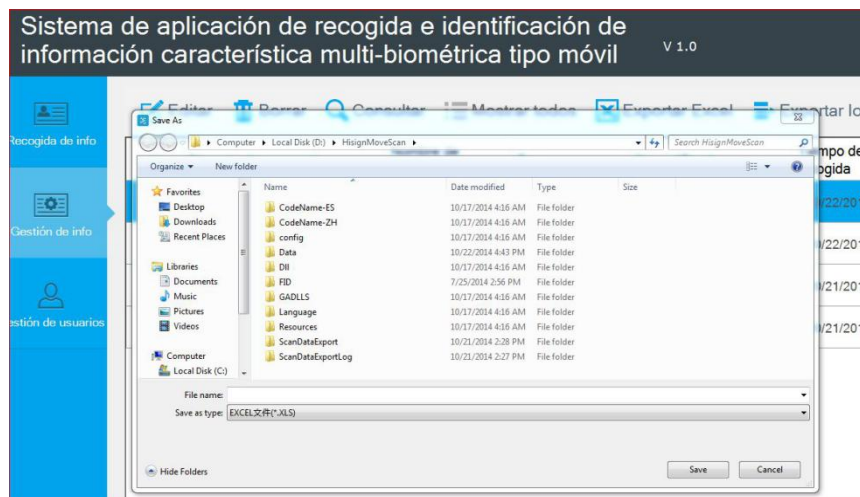



Figure 6.10.1

It is to open the saved Excel file, effect (as shown in figure 6.10.2).the table have comparison result data.

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
1	No. serie de personal	Nombre de personal	Sexo	No. cédula	Tiempo de fecha de (Dirección: Dirección Nacional) Forma de Observaci	Recogido	Resultados de comparación de huella dactilar	Resultados de comparación de huella palm	Resultados de comparación de retrato							
2	1112014100000	fff		10/17/2011 10/26/2014			admin	Todavía no compara	Todavía no compara	Todavía no compara						
3	1112014100000	edels.dff@****		10/16/2011 10/16/2014	Venezuela, 1222-9120		admin	Todavía no compara	Todavía no compara	Todavía no compara						
4	1112014100000	mmmm		10/16/2011 10/16/2014			admin	Datos incompletos	Todavía no compara	Datos incompletos						
5	1112014100000	fff		10/16/2011 10/16/2014			admin	Todavía no compara	Todavía no compara	Datos incompletos						
6	1112014100000	DD		10/15/2011 10/15/2014			admin	Todavía no compara	Todavía no compara	Datos incompletos						
7	1112014100000	fff		10/15/2011 10/15/2014			admin	Datos incompletos	Todavía no compara	Todavía no compara						
8	1112014100000	12		10/15/2011 10/15/2014			admin	Datos incompletos	Datos incompletos	Datos incompletos						
9	1112014100000	xxxx		10/15/2011 10/15/2014			admin	Datos incompletos	Datos incompletos	Datos incompletos						
10	1112014100000	123		10/14/2011 10/14/2014			admin	Todavía no compara	Todavía no compara	Todavía no compara						
11	1112014100000	ffff		10/14/2011 10/14/2014			admin	Datos incompletos	Datos incompletos	Datos incompletos						
12	1112014100000	h		10/13/2011 10/13/2014			admin	Datos incompletos	Datos incompletos	Datos incompletos						

Figure 6.10.2

11. It is to click  button on the page, and enter to the data submission page (as shown in figure 6.11.1).

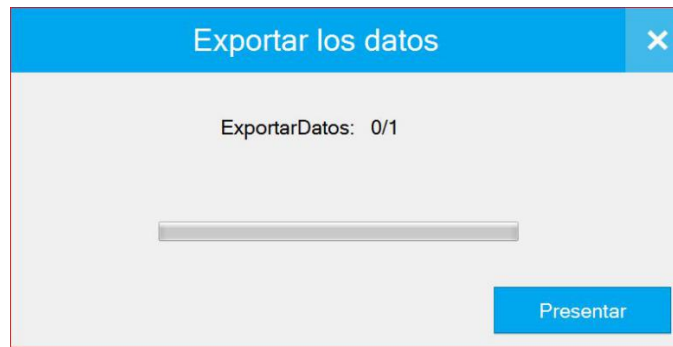

As figure 6.11.1

Data submission will generate data file and submit it to local specified folder for saving. The original pictures which include fingerprint, palm print and portrait are saved in designated location.



Figure 6.11.2

After the success of submission, it is to click [complete] button and remind (as shown in figure 6.11.6), and then it will generate two logs to complete documents (as shown in figure 6.11.7).



Figure 6.11.6

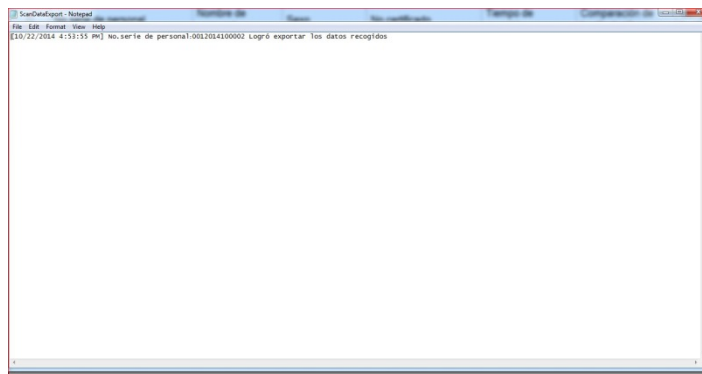


Figure 6.11.7

The two indication logs folders only play the indication and review effect, and can be closed after check.

1.2.3.6 User management



1. In the system main interface, is to click [Gestión de usuarios](#), to enter the user management interface (as shown in figure 7.1.1).

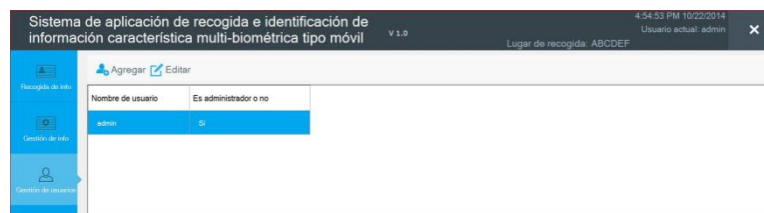


Figure 7.1.1

Admin users can add and edit ordinary users, and ordinary users can only edit users.

Admin users enter to user management interface, and click [Agregar](#), to enter adding general user interface (as shown in figure 7.1.2).

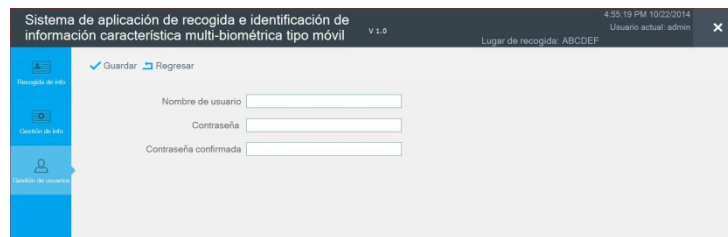



Figure 7.1.2

With reference to a registered administrator user interface, it is to input information, click [save]; the system pop up dialog window reminding “success of new user adding”, and click on [OK], it shall display users list.

In the user interface, it is to choose a certain user, and click , and enter to user edit interface for modification of corresponding information, click [save], the system indicate “edit success”, and then click on [ok]. It shall display users list.

[Note]

Admin user login the system, in the user management interface can search all users; after the ordinary user login the system, in the user management interface can only see his user information.

1.2.3.7 The important export contrast data

The system supports the import and export of data in comparison bank. Among the tools for import and export, respective import and export for fingerprint bank, palm print bank and portrait bank can be chosen.



1. in the desktop is to double-click  icon, it enter import and export comparison date interface (as shown in figure 8.1.1).



Figure8.1.1

Under condition of default, fingerprint, palm print and portrait is be ticked, and please tick as per actual requirement. When the data is to be imported, click the button of “import” as in Figure 8.1.1, then the choice box of folder pops up.

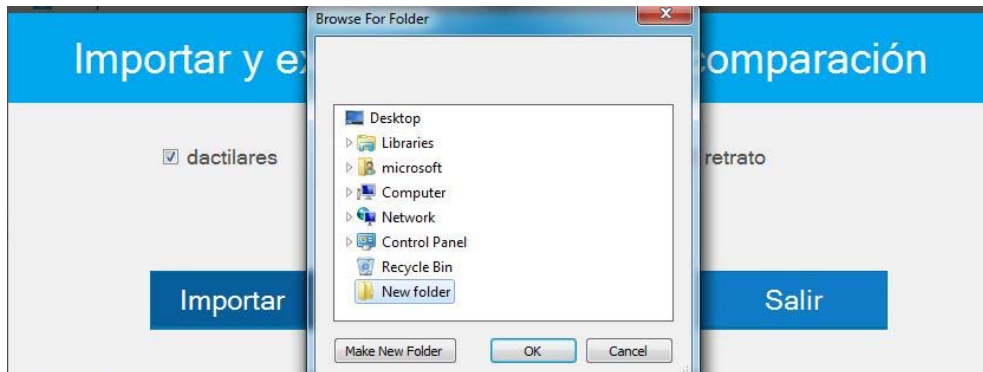


Figure8.1.4

Select the file to be imported and click button of “confirmation”, and then the selected data can be imported.



Figure8.1.5

Click [import], it is to indicate “Whether delete the original comparison data”.

After click [OK] button, it will indicate





Continue to click [ok] button, it will import the process of comparison data
If click the button of “cancel”, the imported data will be accumulated in original data file.

After the success of import comparison data, it is to click [complete], and then open the comparison data log document, the document only take a role of reminder to check. It is fine to close after check.

The application mode of data export tool is the same as that of data import, which are not be repeated here.

11,WIFI Guide

Check the network icon at the lower right corner of the desktop window on the status bar, which will be shown as one of the following:

F1		WIFI not connected
F2		WIFI network adaptor disabled
F3		WIFI successfully connected
F4		IP setting required

F1 If WIFI is not connected, click the icon and a list similar to the following will appear. Select the appropriate name, like




, then click “connect” and input password if requested.

Note: Actual WIFI names displayed on your system will differ from above.
Consult your network administrator for the appropriate WIFI name and


password.

When WIFI connection is successful, the following window will be displayed:

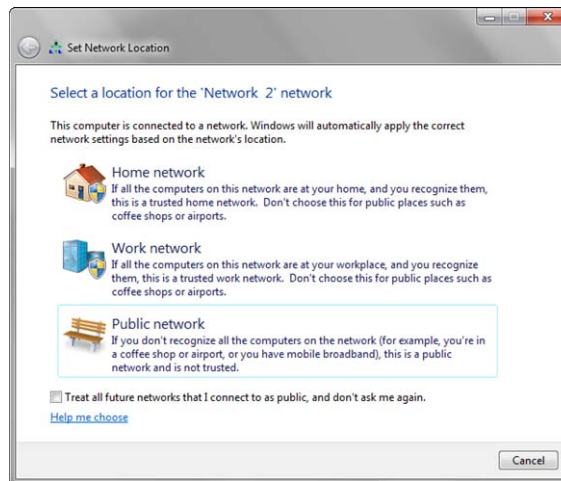


Click “Work network” and the window will close, and WIFI connection is OK. The icon will be as shown in F3.


F2 If the WIFI network adaptor is disabled, right-click on the icon and the following menu pops up:




Select “Open Network and Sharing Center” and the following window will be displayed:

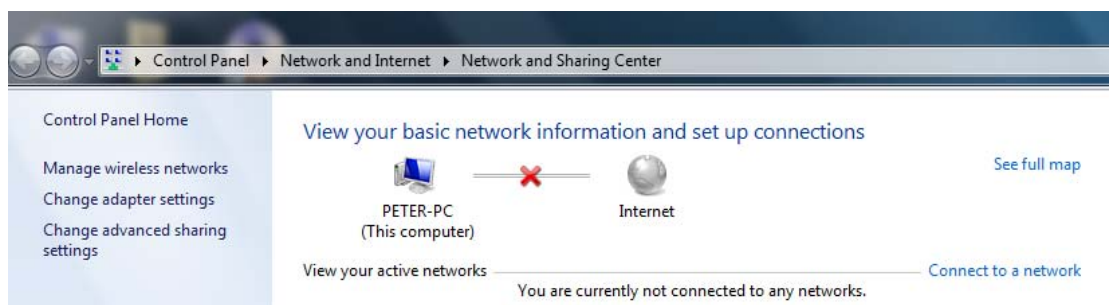


Click “Change adapter settings” on the left and the wireless Network Connection icon will be shown like this:



Right-click on this icon and the popup menu will appear:

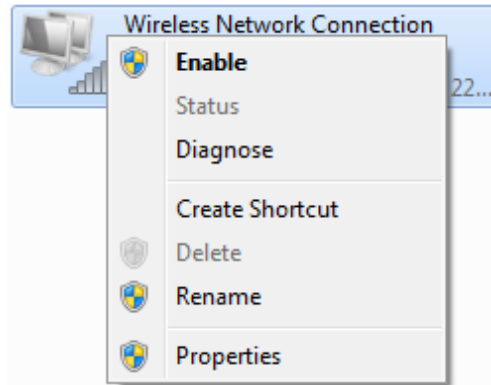

Click “Enable”, the icon will change its appearance into the following:



Exit this window and set the WIFI connection as described in F1.

F4 When IP setting for WIFI is required, consult your WIFI administrator.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications to this unit not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.