

BELKIN®

User Manual
TuneStage™ for iPod®


Introduction

Designed to let you roam and play your tunes from virtually anywhere in your home, TuneStage from Belkin delivers the pristine, CD-quality sound that iPod users desire. Using *Bluetooth*™ technology, TuneStage transmits from up to 33 feet away from your stereo, free of the barriers that limit traditional remotes—such as walls, ceilings, or windows. Please review this User Manual carefully so that you can be sure to get the most from your TuneStage.


What's in the Box




TuneStage *Bluetooth* Transmitter for iPod



TuneStage *Bluetooth* Receiver



7 Ft. RCA Stereo Cable




12V/1A AC Power Adapter

Operating Instructions


STEP 1 - TuneStage Receiver Setup

1. Ensure that your stereo system is powered off.
2. Plug the TuneStage Receiver into your home stereo system either by using the included stereo cable or a standard 3.5mm male/3.5mm male audio cable. Plug the AC power adapter (included) into both the Receiver and AC outlet and press the power button. The blue Status LED on the front will begin blinking.
3. Power on your home stereo system and select the audio channel input that the TuneStage Receiver is connected to.

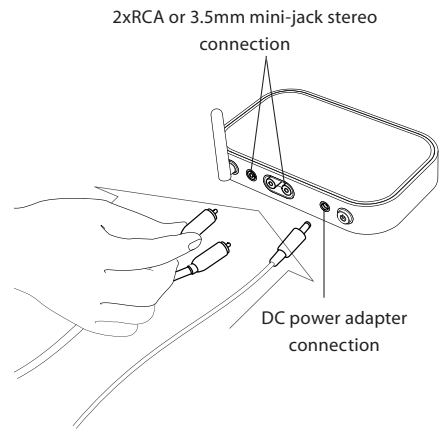



Wall-Mounting the TuneStage Receiver

1. Make sure the antenna is pointed upward.
2. You can hang the TuneStage Receiver on a wall using two screws (not included).
3. The cables should run through the channel on the bottom of the TuneStage Receiver, so they are held securely to the wall.

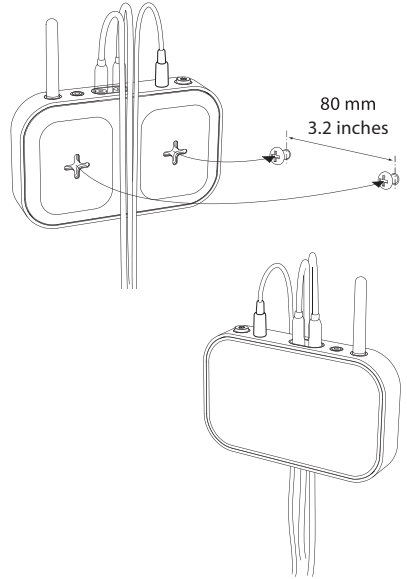

STEP 2 - TuneStage Transmitter Setup

1. Power on your iPod. Then, plug the TuneStage Transmitter into the remote/headphone connector. Press "PLAY" on the iPod. The TuneStage Transmitter will power on automatically. The Transmitter's blue Status LED should be blinking rapidly.
2. The TuneStage Transmitter and Receiver will pair with each other automatically. When the connection has been made, the blue light on the TuneStage Receiver will stop flashing and stay on solid. The light on the Transmitter will now flash slowly.
3. Play a tune from the iPod. Set the volume of the iPod to a medium level, and adjust the volume of your stereo system's speakers as desired.
4. Enjoy!

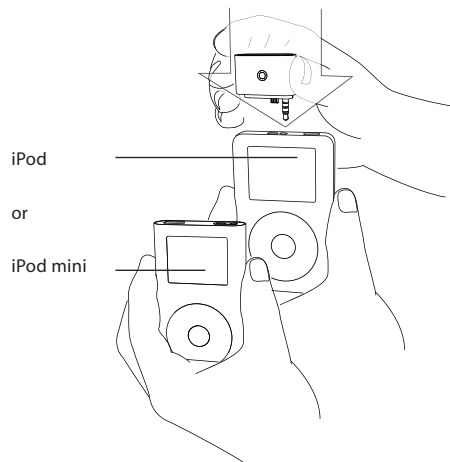

Do not move the Transmitter back and forth to avoid damage to the receptacle

For Best Results


- Try to keep the TuneStage Transmitter close to your home stereo system. While the Transmitter often works at distances of 33 feet or more, a distance of 10 feet or less will minimize interference and maximize performance.
- Power on the TuneStage Receiver first and then plug the Transmitter into the iPod to begin the pairing process.
- Adjust the volume on the iPod to a medium level and increase the volume on the stereo to a desired listening level.
- *Bluetooth* devices are known to have interference from devices operating in the same RF frequency (2.4GHz). However, using AFH (Adaptive Frequency Hopping), the interference with 802.11b/g has been minimized. Some interference (within a 6 1/2-foot range) with microwave ovens and 2.4GHz cordless phones may be present.

Understanding the LEDs

Receiver Status	LED
Power off	Off
Power switched on	Blinks on/off in 0.5 sec. intervals for 20 sec., then turns off
Detecting TX signal from standby	Blinks on/off in 0.5 sec. intervals for 20 sec., then turns off
Paired/receiving signal	On

Rapid Blinking:

Searching for *Bluetooth* Receiver




Slow Blinking:

Paired with Receiver
(*Bluetooth* connection active)



Rapid Blinking:

Searching for *Bluetooth* Transmitter
(LED will turn OFF after 20 seconds
but the Receiver will continue searching)



Steady Light:

Paired with Transmitter
(*Bluetooth* connection active)



Troubleshooting

Transmitter is not powering on when plugged into the iPod.

Remove the Transmitter and reinstall into the top of your iPod.
Ensure your iPod is charged and powered on.

Receiver is not powering on.

Ensure that the Receiver power switch is in the ON position. Ensure that the AC power adapter is connected into a powered wall socket and that the plug is properly inserted into the TuneStage Receiver's power jack.

After connecting the Transmitter and Receiver, there is no sound.

- Select a song on the iPod and press "PLAY".
- Make sure the audio cable is correctly plugged into the back of the TuneStage Receiver as well as to the back of the stereo system.
- Ensure the stereo system is set to the correct input channel.
- Make sure the iPod and stereo receiver are powered on.
- Repeat STEP 1 and STEP 2 from the instructions (page 3 and 4).

Troubleshooting

There are multiple *Bluetooth* transmitters or receivers in the same room or range, and they may be conflicting.

Belkin does not guarantee inter-compatibility with other *Bluetooth* devices; however, the TuneStage Transmitter and Receiver are 100% compatible with each other. Should there be additional *Bluetooth* devices in the same range, please follow these instructions:

There is more than one *Bluetooth* receiver (e.g., TuneStage Receiver and *Bluetooth* headphones) in the same room or range.

The TuneStage Transmitter will pair with the *Bluetooth* receiver that was turned on first or is the closest in proximity to the Transmitter. If you are paired with the incorrect receiver, turn off the power on the receiver that will not be used. Remove and reconnect the TuneStage Transmitter to the iPod.

There is more than one *Bluetooth* transmitter (e.g., TuneStage Transmitter, *Bluetooth* USB dongle) in the same room or range.

The TuneStage Receiver will pair with the closest *Bluetooth* transmitter. Turn off or remove the transmitter that will not be used. Remove and reconnect the TuneStage Transmitter to the iPod or remove and reconnect the USB dongle to the computer.

Specifications

Bluetooth Compliance: Bluetooth v1.2-compliant

Security Code: 1111

Supported Profiles: A2DP, AVRCP

Operating Frequency: 2.4 to 2.4835GHz

Spread Spectrum: FHSS (Frequency Hopping Spread Spectrum)

Modulation: GFSK (Gaussian Frequency Shift Keying)

Radio Characteristics

RF Output: +2.0 dBm

Sensitivity: <0.1% BER at -81 dBm

Operating Range: 33 ft. (10m)*

*33-foot range is dependent upon environment, number of users, and other wireless devices within immediate proximity.

Audio Performance

SNR + THD: -80 dB

Output Power: 80 mW into 600 Ohms

Operating Conditions

Typical Operating Current: <40mA

AC Power: 12V @ 1.0A

Physical

Receiver Dimensions: 6.5" x 4.5" x 1.2"

Transmitter Dimensions: 1.65" x 1.5" x 0.5"

Information

Belkin Corporation Limited 3-Year Product Warranty

Belkin Corporation warrants this product against defects in materials and workmanship for three years. If a defect is discovered, Belkin will, at its option, repair or replace the product at no charge provided it is returned during the warranty period, with transportation charges prepaid, to the authorized Belkin dealer from whom you purchased the product. Proof of purchase may be required. This warranty does not apply if the product has been damaged by accident, abuse, misuse, or misapplication; if the product has been modified without the written permission of Belkin; or if any Belkin serial number has been removed or defaced.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE IN LIEU OF ALL OTHERS, WHETHER ORAL OR WRITTEN, EXPRESSED OR IMPLIED. BELKIN SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

No Belkin dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

BELKIN IS NOT RESPONSIBLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY, OR ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO, LOST PROFITS, DOWNTIME, GOODWILL, DAMAGE TO OR REPROGRAMMING OR REPRODUCING, ANY PROGRAM OR DATA STORED IN OR USED WITH BELKIN PRODUCTS.

Some states do not allow the exclusion or limitation of incidental or consequential damages or exclusion of implied warranties, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

FCC Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canada-Industry Canada (IC)

The wireless radio of this device complies with RSS 139 & RSS 210 Industry Canada. This Class B digital apparatus complies with Canadian ICES-003.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.



BELKIN®

www.belkin.com

Belkin Corporation
501 West Walnut Street
Compton, CA, 90220, USA
310-898-1100
310-898-1111 fax

Belkin Ltd.
Express Business Park, Shipton Way
Rushden, NN10 6GL, United Kingdom
+44 (0) 1933 35 2000
+44 (0) 1933 31 2000 fax

Belkin B.V.
Boeing Avenue 333
1119 PH Schiphol-Rijk, The Netherlands
+31 (0) 20 654 7300
+31 (0) 20 654 7349 fax

Belkin Ltd.
7 Bowen Crescent, West Gosford
NSW 2250, Australia
+61 (0) 2 4372 8600
+61 (0) 2 4372 8603 fax

Tech Support
US: 310-898-1100 ext. 2263
800-223-5546 ext. 2263
Europe: 00 800 223 55 460
Australia: 1800 235 546
New Zealand: 0800 235 546

© 2005 Belkin Corporation. All rights reserved.

All trade names are registered trademarks of respective manufacturers listed.

iPod is a trademark of Apple Computer, Inc., registered in the U.S. and other countries.

The *Bluetooth* name and the *Bluetooth* trademarks are owned by *Bluetooth SIG, Inc.*, and are used by Belkin Corporation under license.