



Ambit Microsystems (Shanghai) LTD.
No 1925, Nanle Road Songjiang Export
Processing Zone Shanghai, China
Tel :86-21-61206688 Ext:22165
FAX:86-21-57749230

User Manual of J20H081

Project Name	WiFi+BT module
Approval Sheet Rev.	1.2
Foxconn Part No.	J20H081.00

Prepared by	Reviewed by	Approved by
Clon Liu	Eddie Huang	



CONTENTS

1	REVISION HISTORY	3
2	MANUFACTURING INFORMATION	4
3	PRODUCT OVERVIEW	5
3.1	APPLICATION SCOPE	5
4	MODULE HARDWARE OVERVIEW	6
4.1	BLOCK DIAGRAM	6
4.2	FEATURES	6
4.3	INTERFACE AND CONNECTOR	6
5	ELECTRICAL SPECIFICATION	8
5.1	ABSOLUTE MAXIMUM RATING	8
5.2	RECOMMENDED OPERATING RATING	8
5.3	DC CHARACTERISTICS	8
5.4	ESD INFORMATION	8
5.5	ENVIRONMENT STORAGE CONDITION	8
6	RF SPECIFICATION	10
6.1	IEEE802.11B	10
6.2	IEEE802.11G	11
6.3	802.11N HT20	12
6.4	802.11A	14
6.5	802.11AN HT20	15
6.6	802.11AN HT40	16
6.7	802.11AC HT80	17
6.8	BLUETOOTH 3.0	18
6.9	ANTENNA ELECTRICAL SPECIFICATION	19
7	MECHANICAL SPECIFICATIONS	20
7.1	SHIELDING COVER DIMENSION	20
7.2	PCB ASSEMBLY DIMENSION	21



1 Revision History

Date	Document revision	Change Description
2013/08/31	1.0	Initial release
2013/10/14	1.1	Add BT specification and modify Wifi specification
2013/10/15	1.2	Modify BT standard from V3.0+HS standard to V3.0 standard Add specification of Aux antenna



2 Manufacturing Information

Manufacture Country:

Made in China

Manufacturer:

Ambit Microsystems (Shanghai) LTD.

Manufacture Address:

No 1925, Nanle Road Songjiang Export Processing Zone Shanghai, China



3 Product Overview

The J20H081.00 802.11a/b/g/n/ac and BT3.0 module provides wireless modem functionality utilizing direct sequence spread spectrum and OFDM/CCK technology. This module is based on MTK MT7650U solution .It fully complies with IEEE 802.11n,IEEE 802.11 a/b/g and ,IEEE 802.11 ac standards, Bluetooth v2.1+EDR, v3.0 standard, offering feature-rich wireless connectivity at high standards, and delivering reliable, cost-effective throughput from an extended distance. Optimized RF architecture and baseband algorithms provide superb performance and low power consumption. Intelligent MAC design deploys a high efficient DMA engine and hardware data processing accelerators which offloads the host processor.

3.1 Application scope

The wireless LAN is compliant to IEEE 802.11n,IEEE 802.11 a/b/g and IEEE 802.11 ac standards . The data rate of 802.11b is up to 11Mbps and fallback rates of 5.5, 2, 1Mbps. The data rate of 802.11a/g is up to 54Mbps and fallback rates of 48,36,24,18,12,9, 6Mbps. The data rate of 802.11n HT20 is up to 65Mbps and fallback rates of 58.5, 52, 39, 26, 19.5, 13, 6.5Mbps;
The data rate of 802.11n HT40 is up to 130Mbps and fallback rates of 117, 104, 78, 52, 39, 26, 13Mbps;
The data rate of 802.11ac VHT80 is up to 433.3Mbps and fallback rates of 390,325,292.5,260,195,130,97.5,65,32.5Mbps;

The BT Module is compliant to Bluetooth 3.0 and EDR standard:

Carrier Frequency: 2402MHz ~ 2480 MHz

Carrier Spacing: 1.0MHz

Duplexing: TDD

Modulation: FHSS


GFSK, pi/4-DQPSK, 8DPSK

Symbol Rate: 1Mbps (GFSK), 2Mbps (pi/4-DQPSK), 3Mbps (8DPSK)

4 Module Hardware Overview

4.1 Block Diagram

The general HW architecture is shown below Figure:

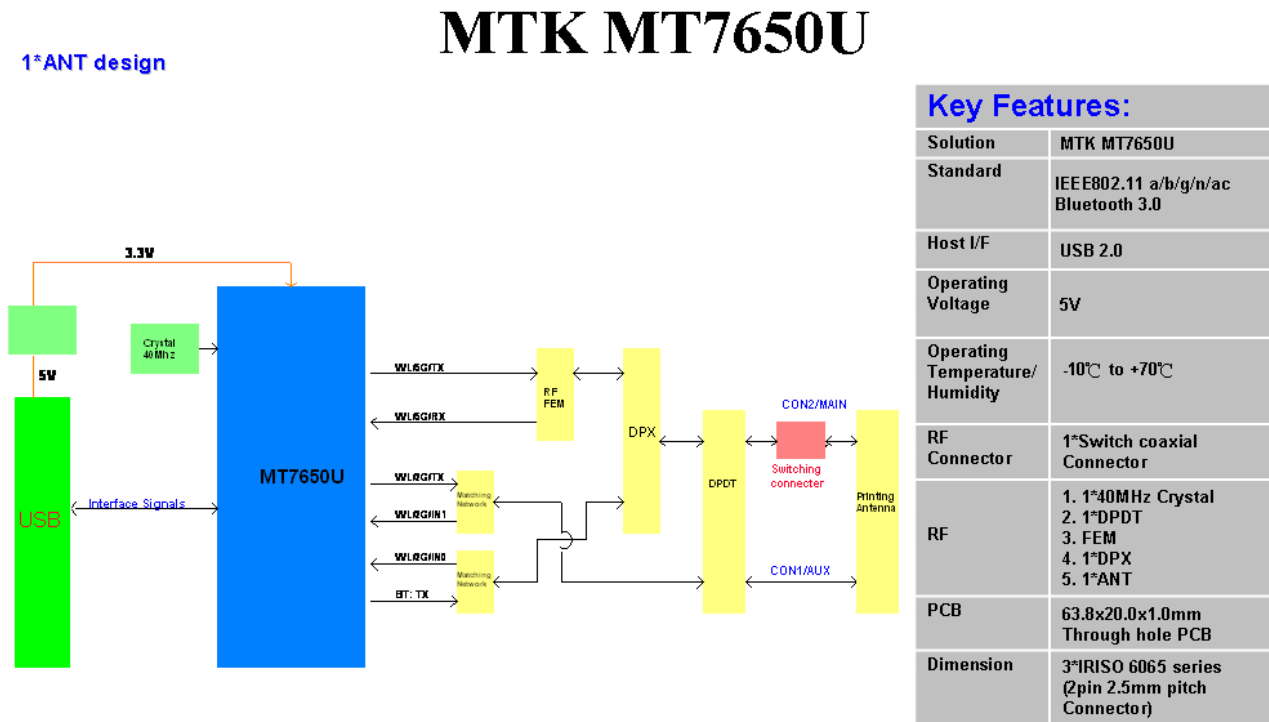


Module Block Diagram

4.2 Features

- ◆ IEEE802.11a/b/g/n/ac (1X1) based on MTK MT7650U solution.
- ◆ Support BT3.0
- ◆ USB 2.0 Interface, High and Full Speeds supported.
- ◆ Module is powered by the host with a 5.0V +/- 5% supply.
- ◆ External PCB printed antennas.
- ◆ 4 layers through hole PCB design with FR4 material

4.3 Interface and Connector

- ◆ Pin definition:
- ◆ Vendor: JST
- ◆ Vendor P/N: SM05B-GHS-TB

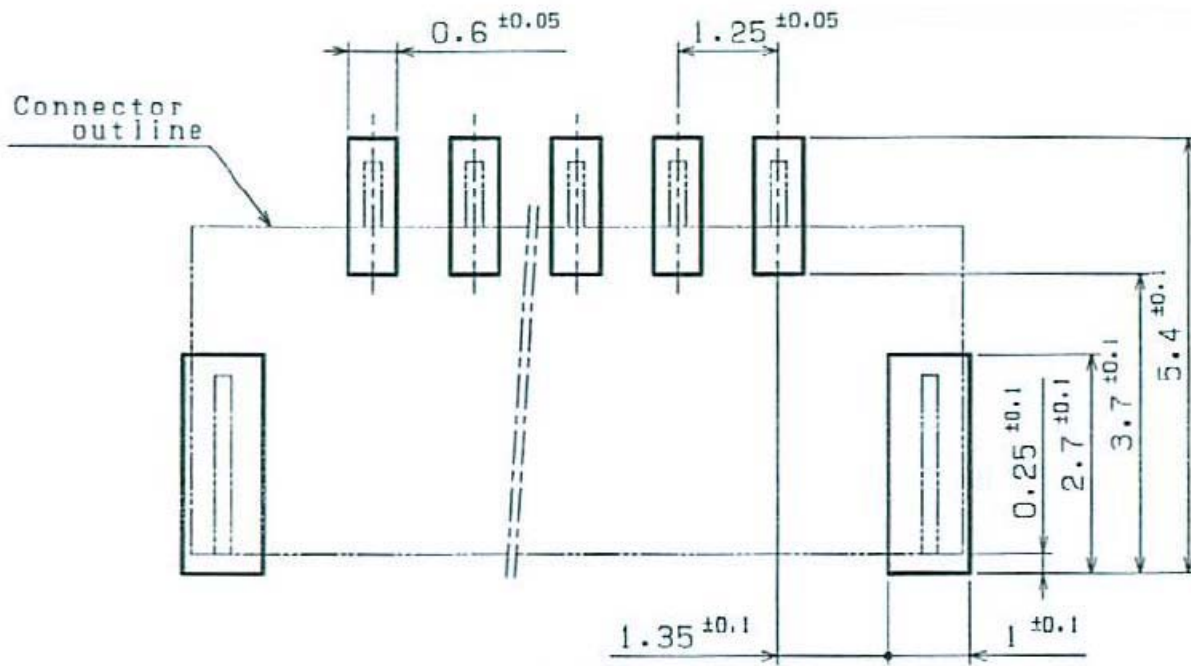

Recommendable P.C.Board layout

Pin Number	Symbol Name	Status	Pin definition
1	GND		Ground
2	DP	I/O	USB positive data
3	DM	I/O	USB negative data
4	UV+	P	USB +5V power input
5	GND		Ground
S1	GND		Ground
S2	GND		Ground



5 Electrical Specification

5.1 Absolute maximum rating

Element	Symbol	Min	Typ	Max	Unit
DC supply voltage	UV+		5.0	6.5	(V)

5.2 Recommended operating rating

Element	Symbol	Min	Typ	Max	Unit
DC supply voltage	UV+	4.5	5.0	5.5	(V)

5.3 DC Characteristics

Symbol	Parameter	Min	Typ.	Max	Unit
UV+	Supply voltage	4.5	5.0	5.5	(V)
	2.4GHz Tx Current(1M/15dBm)		200		(mA)
	2.4GHz Tx Current(11M/15dBm)		-		(mA)
	2.4GHz Tx Current(6M/15dBm)		-		(mA)
	2.4GHz Tx Current(54M/15dBm)		220		(mA)
	2.4GHz Tx Current(MCS0/15Bm/HT20)		220		(mA)
	2.4GHz Tx Current(MCS7/15dBm/HT20)		220		(mA)
	Rx Current			80	(mA)
	5GHz Tx Current(6M/12dBm)			-	(mA)
	5GHz Tx Current(54M/12dBm)			-	(mA)
	5GHz Tx Current(MCS0/12Bm/HT20)			-	(mA)
	5GHz Tx Current(MCS7/12dBm/HT20)			-	(mA)
	5GHz Tx Current(MCS0/12Bm/HT40)			-	(mA)
	5GHz Tx Current(MCS7/12dBm/HT40)			300	(mA)
	5GHz Tx Current(MCS0/11Bm/VHT80)			-	(mA)
	5GHz Tx Current(MCS9/11dBm/VHT80)			-	(mA)

5.4 ESD Information

Mode	Level	Unit
HBM	1000	V

5.5 Environment Storage Condition



Environment condition	
Temperature	Operating Temperature: -10 deg.C ~70 deg.C
	Storage Temperature: -40 deg.C ~85 deg.C
Humidity	Operating Humidity: 20% ~90%
	Storage Humidity: 20% ~90%



6 RF Specification

6.1 IEEE802.11b

Items	Contents			
Specification	IEEE802.11b			
Mode	DSSS / CCK			
Channel	CH1 to CH11			
Data rate	1, 2, 5.5, 11Mbps			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@1Mbps	13.5	15	16.5	dBm
2) Target Power@2Mbps	13.5	15	16.5	dBm
3) Target Power@5.5Mbps	13.5	15	16.5	dBm
4) Target Power@11Mbps	13.5	15	16.5	dBm
2. Spectrum Mask @15dBm				
1) $f_c - 33\text{MHz} < f < f_c - 22\text{MHz}$	-	-	-50	dBr
2) $f_c - 22\text{MHz} < f < f_c - 11\text{MHz}$	-	-	-30	dBr
3) $f_c + 11\text{MHz} < f < f_c + 22\text{MHz}$	-	-	-30	dBr
4) $f_c + 22\text{MHz} < f < f_c + 33\text{MHz}$	-	-	-50	dBr
3. Frequency Error	-10	-	+10	ppm
4 Modulation Accuracy(EVM)@15dBm				
1) 1Mbps	-		-10	dB
2) 2Mbps	-		-10	dB
3) 5.5Mbps	-		-10	dB
4) 11Mbps	-		-10	dB
RX Characteristics	Min.	Typ.	Max.	Unit
5 Minimum Input Level Sensitivity				
1) 1Mbps (FER \leq 8%)	-	-92	-91	dBm
2) 2Mbps (FER \leq 8%)	-	-91	-89	dBm
3) 5.5Mbps (FER \leq 8%)	-	-90	-87	dBm
4) 11Mbps (FER \leq 8%)	-	-89	-85	dBm
6 Maximum Input Level (FER \leq 8%)	-10	-5	-	dBm

6.2 IEEE802.11g

Items	Contents			
Specification	IEEE802.11g			
Mode	OFDM			
Channel	CH1 to CH11			
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@6Mbps	13.5	15	16.5	dBm
2) Target Power@9Mbps	13.5	15	16.5	dBm
3) Target Power@12Mbps	13.5	15	16.5	dBm
4) Target Power@18Mbps	13.5	15	16.5	dBm
5) Target Power@24Mbps	13.5	15	16.5	dBm
6) Target Power@36Mbps	13.5	15	16.5	dBm
7) Target Power@48Mbps	13.5	15	16.5	dBm
8) Target Power@54Mbps	13.5	15	16.5	dBm
2. Spectrum Mask @15dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-40	dBr
3 Modulation Accuracy(EVM)@15dBm				
1) 6Mbps	-	-	-5	dB
2) 9Mbps	-	-	-8	dB
3) 12Mbps	-	-	-10	dB
4) 18Mbps	-	-	-13	dB
5) 24Mbps	-	-	-16	dB
6) 36Mbps	-	-	-19	dB
7) 48Mbps	-	-	-22	dB
8) 54Mbps	-	-28	-25	dB
4 Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5 Minimum Input Level Sensitivity				
1) 6Mbps (PER <10%)	-	-92	-83	dBm
2) 9Mbps (PER < 10%)	-	-91	-81	dBm
3) 12Mbps (PER < 10%)	-	-90	-79	dBm
4) 18Mbps (PER < 10%)	-	-87	-77	dBm
5) 24Mbps (PER < 10%)	-	-85	-75	dBm
6) 36Mbps (PER < 10%)	-	-80	-73	dBm
7) 48Mbps (PER < 10%)	-	-77	-71	dBm
8) 54Mbps (PER < 10%)	-	-75	-69	dBm
6 Maximum Input Level (PER < 10%)	-20	-11	-	dBm

6.3 802.11n HT20

Items	Contents			
Specification	IEEE802.11n HT20			
Mode	OFDM			
Channel	CH2 to CH10			
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@MCS0	13.5	15	16.5	dBm
2) Target Power@ MCS1	13.5	15	16.5	dBm
3) Target Power@ MCS2	13.5	15	16.5	dBm
4) Target Power@ MCS3	13.5	15	16.5	dBm
5) Target Power@ MCS4	13.5	15	16.5	dBm
6) Target Power@ MCS5	13.5	15	16.5	dBm
7) Target Power@ MCS6	13.5	15	16.5	dBm
8) Target Power@ MCS7	13.5	15	16.5	dBm
2. Spectrum Mask @15dBm				
1) at fc +/- 11MHz	-	-	-20	dB
2) at fc +/- 20MHz	-	-	-28	dB
3) at fc > +/-30MHz	-	-	-45	dB
3. Modulation Accuracy(EVM)@15dBm				
1) MCS0	-	-	-5	dB
2) MCS1	-	-	-10	dB
3) MCS2	-	-	-13	dB
4) MCS3	-	-	-16	dB
5) MCS4	-	-	-19	dB
6) MCS5	-	-	-22	dB
7) MCS6	-	-	-25	dB
8) MCS7	-	-	-28	dB
4. Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5. Minimum Input Level Sensitivity				
1) MCS0 (PER < 10%)	-	-91	-81	dBm
2) MCS1 (PER < 10%)	-	-89	-79	dBm
3) MCS2 (PER < 10%)	-	-87	-77	dBm
4) MCS3 (PER < 10%)	-	-84	-75	dBm
5) MCS4 (PER < 10%)	-	-80	-73	dBm
6) MCS5 (PER < 10%)	-	-75	-71	dBm
7) MCS6 (PER < 10%)	-	-74	-69	dBm
8) MCS7 (PER < 10%)	-	-72	-67	dBm
6. Maximum Input Level (PER < 10%)	-20	-10	-	dBm

Items	Contents			
Specification	IEEE802.11n HT20			
Mode	OFDM			
Channel	CH1, CH11			
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@MCS0	12.5	14	15.5	dBm
2) Target Power@ MCS1	12.5	14	15.5	dBm
3) Target Power@ MCS2	12.5	14	15.5	dBm
4) Target Power@ MCS3	12.5	14	15.5	dBm
5) Target Power@ MCS4	12.5	14	15.5	dBm
6) Target Power@ MCS5	12.5	14	15.5	dBm
7) Target Power@ MCS6	12.5	14	15.5	dBm
8) Target Power@ MCS7	12.5	14	15.5	dBm
2. Spectrum Mask @15dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-45	dBr
3. Modulation Accuracy(EVM)@15dBm				
1) MCS0	-	-	-5	dB
2) MCS1	-	-	-10	dB
3) MCS2	-	-	-13	dB
4) MCS3	-	-	-16	dB
5) MCS4	-	-	-19	dB
6) MCS5	-	-	-22	dB
7) MCS6	-	-	-25	dB
8) MCS7	-	-	-28	dB
4. Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5. Minimum Input Level Sensitivity				
1) MCS0 (PER < 10%)	-	-91	-81	dBm
2) MCS1 (PER < 10%)	-	-89	-79	dBm
3) MCS2 (PER < 10%)	-	-87	-77	dBm
4) MCS3 (PER < 10%)	-	-84	-75	dBm
5) MCS4 (PER < 10%)	-	-80	-73	dBm
6) MCS5 (PER < 10%)	-	-75	-71	dBm
7) MCS6 (PER < 10%)	-	-74	-69	dBm
8) MCS7 (PER < 10%)	-	-72	-67	dBm
6. Maximum Input Level (PER < 10%)	-20	-10	-	dBm

6.4 802.11a

Items	Contents			
Specification	IEEE802.11a			
Mode	OFDM			
Channel	CH36 to CH165			
Data rate	6, 9, 12, 18, 24, 36, 48, 54Mbps			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@6Mbps	10.5	12	13.5	dBm
2) Target Power@9Mbps	10.5	12	13.5	dBm
3) Target Power@12Mbps	10.5	12	13.5	dBm
4) Target Power@18Mbps	10.5	12	13.5	dBm
5) Target Power@24Mbps	10.5	12	13.5	dBm
6) Target Power@36Mbps	10.5	12	13.5	dBm
7) Target Power@48Mbps	10.5	12	13.5	dBm
8) Target Power@54Mbps	10.5	12	13.5	dBm
2. Spectrum Mask @12dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-40	dBr
3 Modulation Accuracy(EVM)@15dBm				
1) 6Mbps	-	-	-5	dB
2) 9Mbps	-	-	-8	dB
3) 12Mbps	-	-	-10	dB
4) 18Mbps	-	-	-13	dB
5) 24Mbps	-	-	-16	dB
6) 36Mbps	-	-	-19	dB
7) 48Mbps	-	-	-22	dB
8) 54Mbps	-	-28	-25	dB
4 Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5 Minimum Input Level Sensitivity				
1) 6Mbps (PER < 10%)	-	-92	-83	dBm
2) 9Mbps (PER < 10%)	-	-91	-81	dBm
3) 12Mbps (PER < 10%)	-	-90	-79	dBm
4) 18Mbps (PER < 10%)	-	-87	-77	dBm
5) 24Mbps (PER < 10%)	-	-85	-75	dBm
6) 36Mbps (PER < 10%)	-	-80	-73	dBm
7) 48Mbps (PER < 10%)	-	-77	-71	dBm
8) 54Mbps (PER < 10%)	-	-75	-69	dBm
6 Maximum Input Level (PER < 10%)	-20	-11	-	dBm

6.5 802.11an HT20

Items	Contents			
Specification	IEEE802.11an HT20			
Mode	OFDM			
Channel	CH36 to CH165			
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@MCS0	10.5	12	13.5	dBm
2) Target Power@ MCS1	10.5	12	13.5	dBm
3) Target Power@ MCS2	10.5	12	13.5	dBm
4) Target Power@ MCS3	10.5	12	13.5	dBm
5) Target Power@ MCS4	10.5	12	13.5	dBm
6) Target Power@ MCS5	10.5	12	13.5	dBm
7) Target Power@ MCS6	10.5	12	13.5	dBm
8) Target Power@ MCS7	10.5	12	13.5	dBm
2. Spectrum Mask @15dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-45	dBr
3. Modulation Accuracy(EVM)@15dBm				
1) MCS0	-	-	-5	dB
2) MCS1	-	-	-10	dB
3) MCS2	-	-	-13	dB
4) MCS3	-	-	-16	dB
5) MCS4	-	-	-19	dB
6) MCS5	-	-	-22	dB
7) MCS6	-	-	-25	dB
8) MCS7	-	-	-28	dB
4. Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5. Minimum Input Level Sensitivity				
1) MCS0 (PER < 10%)	-	-91	-81	dBm
2) MCS1 (PER < 10%)	-	-89	-79	dBm
3) MCS2 (PER < 10%)	-	-87	-77	dBm
4) MCS3 (PER < 10%)	-	-84	-75	dBm
5) MCS4 (PER < 10%)	-	-80	-73	dBm
6) MCS5 (PER < 10%)	-	-75	-71	dBm
7) MCS6 (PER < 10%)	-	-74	-69	dBm
8) MCS7 (PER < 10%)	-	-72	-67	dBm
6. Maximum Input Level (PER < 10%)	-20	-10	-	dBm

6.6 802.11an HT40

Items	Contents			
Specification	IEEE802.11an HT20			
Mode	OFDM			
Channel	CH38 to CH159			
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@MCS0	10.5	12	13.5	dBm
2) Target Power@ MCS1	10.5	12	13.5	dBm
3) Target Power@ MCS2	10.5	12	13.5	dBm
4) Target Power@ MCS3	10.5	12	13.5	dBm
5) Target Power@ MCS4	10.5	12	13.5	dBm
6) Target Power@ MCS5	10.5	12	13.5	dBm
7) Target Power@ MCS6	10.5	12	13.5	dBm
8) Target Power@ MCS7	10.5	12	13.5	dBm
2. Spectrum Mask @15dBm				
1) at fc +/- 11MHz	-	-	-20	dBr
2) at fc +/- 20MHz	-	-	-28	dBr
3) at fc > +/-30MHz	-	-	-45	dBr
3. Modulation Accuracy(EVM)@15dBm				
1) MCS0	-	-	-5	dB
2) MCS1	-	-	-10	dB
3) MCS2	-	-	-13	dB
4) MCS3	-	-	-16	dB
5) MCS4	-	-	-19	dB
6) MCS5	-	-	-22	dB
7) MCS6	-	-	-25	dB
8) MCS7	-	-	-28	dB
4. Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5. Minimum Input Level Sensitivity				
1) MCS0 (PER < 10%)	-	-88	-78	dBm
2) MCS1 (PER < 10%)	-	-86	-76	dBm
3) MCS2 (PER < 10%)	-	-84	-74	dBm
4) MCS3 (PER < 10%)	-	-81	-72	dBm
5) MCS4 (PER < 10%)	-	-77	-70	dBm
6) MCS5 (PER < 10%)	-	-72	-68	dBm
7) MCS6 (PER < 10%)	-	-71	-66	dBm
8) MCS7 (PER < 10%)	-	-69	-64	dBm
6. Maximum Input Level (PER < 10%)	-20	-10	-	dBm

6.7 802.11ac HT80

Items	Contents			
Specification	IEEE802.11ac HT80			
Mode	OFDM			
Channel	CH42 to CH155			
Data rate (MCS index)	MCS0/1/2/3/4/5/6/7/8/9			
TX Characteristics	Min.	Typ.	Max.	Unit
1. Power Levels (Calibrated)				
1) Target Power@MCS0	9.5	11	12.5	dBm
2) Target Power@ MCS1	9.5	11	12.5	dBm
3) Target Power@ MCS2	9.5	11	12.5	dBm
4) Target Power@ MCS3	9.5	11	12.5	dBm
5) Target Power@ MCS4	9.5	11	12.5	dBm
6) Target Power@ MCS5	9.5	11	12.5	dBm
7) Target Power@ MCS6	9.5	11	12.5	dBm
8) Target Power@ MCS7	9.5	11	12.5	dBm
2. Spectrum Mask @15dBm				
1) at fc +/- 11MHz	-	-	-20	dB
2) at fc +/- 20MHz	-	-	-28	dB
3) at fc > +/-30MHz	-	-	-45	dB
3. Modulation Accuracy(EVM)@15dBm				
1) MCS0	-	-	-5	dB
2) MCS1	-	-	-10	dB
3) MCS2	-	-	-13	dB
4) MCS3	-	-	-16	dB
5) MCS4	-	-	-19	dB
6) MCS5	-	-	-22	dB
7) MCS6	-	-	-25	dB
8) MCS7	-	-	-28	dB
4. Frequency Error	-10	-	+10	ppm
RX Characteristics	Min.	Typ.	Max.	Unit
5. Minimum Input Level Sensitivity				
1) MCS0 (PER < 10%)	-	-80	-75	dBm
2) MCS1 (PER < 10%)	-	-78	-73	dBm
3) MCS2 (PER < 10%)	-	-76	-71	dBm
4) MCS3 (PER < 10%)	-	-74	-69	dBm
5) MCS4 (PER < 10%)	-	-72	-67	dBm
6) MCS5 (PER < 10%)	-	-70	-65	dBm
7) MCS6 (PER < 10%)	-	-68	-63	dBm
8) MCS7 (PER < 10%)	-	-66	-61	dBm
9) MCS7 (PER < 10%)	-	-63	-58	dBm
10) MCS7 (PER < 10%)	-	-59	-54	dBm
6. Maximum Input Level (PER < 10%)	-20	-10	-	dBm



6.8 Bluetooth 3.0

Items	Contents			
	Min.	Typ.	Max.	Unit
- TX Characteristics -				
1. Power Levels				
BT Output Power (Basic Data Rate)	-3	0	2	dBm
2. Initial Carrier Frequency Tolerance				
Average Offset	-75	0	75	kHz
3. Carrier Drift				
Drift Rate				
DH1	-20	0	20	kHz/50us
DH3	-20	0	20	kHz/50us
DH5	-20	0	20	kHz/50us
Average Drift				
DH1	-25	0	25	kHz
DH3	-40	0	40	kHz
DH5	-40	0	40	kHz
4. Modulation Characteristic				
F1avg	140	150	175	kHz
F2max	115	140		kHz
F1/F2 Ratio	0.8	0.96		
5. EDR Carrier Frequency Stability and Modulation Accuracy				
2Mbps: $\pi/4$ DQPSK				
Initial Frequency Error: ω_i	-75	0	75	kHz
Frequency Error: ω_0	-10	0	10	kHz
Block Frequency Error: $\omega_i + \omega_0$	-75	0	75	kHz
RMS DEVM	-	0.05	0.2	
Peak DEVM	-	0.12	0.35	
99% DEVM (% Symbols ≤ 0.3)	99%	100%		
3Mbps: 8DPSK				
Initial Frequency Error: ω_i	-75	0	75	kHz
Frequency Error: ω_0	-10	0	10	kHz
Block Frequency Error: $\omega_i + \omega_0$	-75	0	75	kHz
RMS DEVM	-	0.05	0.13	
Peak DEVM	-	0.13	0.25	
99% DEVM (% Symbols ≤ 0.13)	99%	100%		

- RX Characteristics -				
	Min.	Typ.	Max.	Unit
1. Minimum Input Level Sensitivity				
GFSK (1Mbps)	-	-88	-79	dBm
$\pi/4$ DQPSK (2Mbps)	-	-88	-79	dBm
8DPSK (3Mbps)	-	-84	-76	dBm



6.9 Antenna Electrical Specification

Parameter	Value	Units
Operating frequency range	2.4 ~ 2.4835	GHz
	5.15~5.85	
Antenna gain (max)	-0.4	dBi (Main Antenna)
	1.12	
Antenna gain (max)	0.28	dBi (Aux Antenna)
	0.9	

7 Mechanical Specifications

7.1 Shielding Cover Dimension

Dimension (LxWxH): 25.19mm x 18.56mm x 2.0mm

Thickness: 0.2mm

REV.	MARK.	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00			2013.03.28	FIRST RELEASE	fu yu
01	▲		2013.06.10	UPDATE THE (2) (4)	fu yu

NOTE:

1. † MEANS CRITICAL DIMENSION
2. COLOR NATURE
3. PART TO BE FREE OF MANUFACTURING LUBRICANTS.
4. ALL UNSPECIFIED INSIDE BEND RADIUS TO BE 0.25 mm OR LESS.
5. ARROW INDICATES PUNCH DIRECTION.
6. THERE MUST NOT BE SMUDGINESS, SMEAR, ACCIDENTED, DISTORTION, OXIDATION ON THE SURFACE
7. THE WIDTH OF THE SCRATCH SHOULD NOT BE BIGGER THEN 0.05MM AND ALL THE SCRATCH IN THE AREA OF 25 SQUARE CENTIMETER SHOULD NOT BE BIGGER THEN 50MM.
8. MATERIAL THICKNESS TOLERANCE: 0.01MM
9. ALL 90 DEG BEND WALLS TOLERANCE -1 TO +1 DEGS
10. THE DIMENSION WITHOUT TOLERANCE WILL REFER TO THE TOLERANCE BOW AS BELOW "†" level with "†" MARKED.
11. THIS PART MUST BE COMPLIED WITH EU WEEE AND ROHS RULE

MATERIAL (SPEC.)		C7521(Mitsubishi) T=0.2mm		SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG		
FINISH				SHEET			
				UNIT	SHIELDING COVER		
				SIZE	MODEL	PART NO.	DESIGNED
					J20H081.00	426.01799.005	fu yu
					CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
							Jon zhou

LAST USED	(14)	6-30	0.10	0.15	0.20	0.30	0.50	0.50	0.30	0.20	0.05
---		30-120	0.15	0.20	0.30	0.50	0.50	0.20	0.25	0.10	
---		120-300	0.20	0.30	0.40	0.50	0.50	0.10	0.03	0.30	0.15
---		300-450	0.25	0.40	0.50	0.50	0.50	0.15	0.05	0.50	0.20
---		450-600	0.30	0.50	0.60	0.50	0.50	0.20	0.05	0.80	0.20


DIMENSION DESIGNATOR	DRAFT	TOLERANCE	0.2	CRITICAL DIM.	MARK	†
----------------------	-------	-----------	-----	---------------	------	---



7.2 PCB Assembly Dimension

Dimension (W x L x H): 63.8mmx20mmx1.0mm

PCB: 4 layer HF-FR4 design

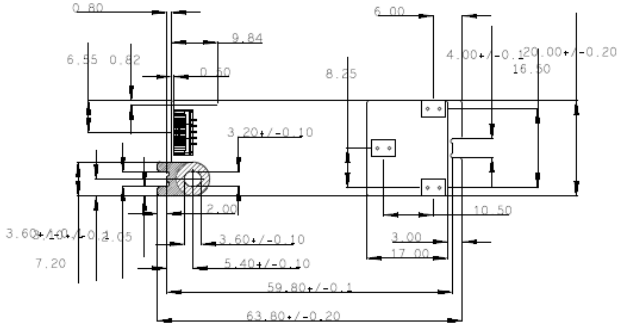

MATERIAL (SPEC.)										SCALE 1:1		FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG																																																																								
FINISH										SHEET																																																																										
<table border="1"> <thead> <tr> <th>Select</th> <th>A</th> <th>B</th> <th>C</th> <th>EMS</th> <th>EP</th> <th>BAG</th> <th>CTN</th> <th>LABE</th> <th>USR</th> </tr> </thead> <tbody> <tr> <td>0x6</td> <td>0.05</td> <td>0.05</td> <td>0.10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.20</td> </tr> <tr> <td>0x30</td> <td>0.10</td> <td>0.10</td> <td>0.20</td> <td>0.50</td> <td>0.50</td> <td>0.00</td> <td></td> <td></td> <td>0.20</td> </tr> <tr> <td>30x120</td> <td>0.15</td> <td>0.20</td> <td>0.30</td> <td>0.50</td> <td>0.50</td> <td>0.00</td> <td>0.00</td> <td>0.20</td> <td>0.10</td> </tr> <tr> <td>20x30</td> <td>0.20</td> <td>0.30</td> <td>0.40</td> <td>1.00</td> <td>1.00</td> <td>0.00</td> <td>0.00</td> <td>0.30</td> <td>0.20</td> </tr> <tr> <td>00x40</td> <td>0.20</td> <td>0.40</td> <td>0.50</td> <td>0.00</td> <td>0.15</td> <td>0.00</td> <td>0.00</td> <td>0.30</td> <td>0.20</td> </tr> <tr> <td>00x60</td> <td>0.30</td> <td>0.50</td> <td>0.60</td> <td>0.00</td> <td>0.00</td> <td>0.00</td> <td>0.00</td> <td>0.30</td> <td>0.20</td> </tr> </tbody> </table>										Select	A	B	C	EMS	EP	BAG	CTN	LABE	USR	0x6	0.05	0.05	0.10						0.20	0x30	0.10	0.10	0.20	0.50	0.50	0.00			0.20	30x120	0.15	0.20	0.30	0.50	0.50	0.00	0.00	0.20	0.10	20x30	0.20	0.30	0.40	1.00	1.00	0.00	0.00	0.30	0.20	00x40	0.20	0.40	0.50	0.00	0.15	0.00	0.00	0.30	0.20	00x60	0.30	0.50	0.60	0.00	0.00	0.00	0.00	0.30	0.20	UNIT MM		PART NAME OUTLINE DRAWING		
Select	A	B	C	EMS	EP	BAG	CTN	LABE	USR																																																																											
0x6	0.05	0.05	0.10						0.20																																																																											
0x30	0.10	0.10	0.20	0.50	0.50	0.00			0.20																																																																											
30x120	0.15	0.20	0.30	0.50	0.50	0.00	0.00	0.20	0.10																																																																											
20x30	0.20	0.30	0.40	1.00	1.00	0.00	0.00	0.30	0.20																																																																											
00x40	0.20	0.40	0.50	0.00	0.15	0.00	0.00	0.30	0.20																																																																											
00x60	0.30	0.50	0.60	0.00	0.00	0.00	0.00	0.30	0.20																																																																											
LAST USED										SIZE A4		MODEL J20H081.00		PART NO.		DESIGNED fu yu																																																																				
NOT USED												CUSTOMER MODEL		CUSTOMER PART NO.		APPROVED Anda woo																																																																				
DIMENSION DESIGNATOR										DRAFT TOLERANCE		0.2		CRITICAL DIM. MARK																																																																						

Industry Canada statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This device is intended only for OEM integrators under the following conditions: (For module device use)

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
 - 2) The transmitter module may not be co-located with any other transmitter or antenna.
- As long as 2 conditions above are met, further transmitter test will not be required.



However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes: (Pour utilisation de dispositif module)

- 1) L'antenne doit être installée de telle sorte qu'une distance de 20 cm est respectée entre l'antenne et les utilisateurs, et
- 2) Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne. Tant que les 2 conditions ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains IC: 2878D-J20H081".

Plaque signalétique du produit final

Ce module émetteur est autorisé uniquement pour une utilisation dans un dispositif où l'antenne peut être installée de telle sorte qu'une distance de 20cm peut être maintenue entre l'antenne et les utilisateurs. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: 2878D- J20H081".

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module.

Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.

Caution :

- (i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and



5470-5725 MHz shall comply with the e.i.r.p. limit; and

(iii) the maximum antenna gain permitted for devices in the band 5725-5825 MHz shall comply with the e.i.r.p. limits specified for point-to-point and non point-to-point operation as appropriate.

(iv) Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Avertissement:

Le guide d'utilisation des dispositifs pour réseaux locaux doit inclure des instructions précises sur les restrictions susmentionnées, notamment :

(i) les dispositifs fonctionnant dans la bande 5 150-5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;

(ii) le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5 250-5 350 MHz et 5 470-5 725 MHz doit se conformer à la limite de p.i.r.e.;

(iii) le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5 725-5 825 MHz) doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

(iv) De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5 250-5 350 MHz et 5 650-5 850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party



responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Operations in the 5.15-5.25GHz band are restricted to indoor usage only.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device is intended only for OEM integrators under the following conditions:

1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and 2) The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for reevaluating

the end product (including the transmitter) and obtaining a separate FCC authorization.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: MCLJ20H081". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

For Taiwan 警語：(電信管制射頻器材使用)

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Note: 1. 本模組於取得認證後將依規定於模組本體標示審驗合格標籤 2. 系統廠商應於平台上標示「本產品內含射頻模組: XXXyyyLPDzzzz-x (NCC ID) 」字樣



Europe – EU Declaration of Conformity

This device complies with the essential requirements of the R&TTE Directive 1999/5/EC. The following test methods have been

applied in order to prove presumption of conformity with the essential requirements of the R&TTE Directive 1999/5/EC:
EN 60950-1: 2006+A11:2009+A1:2010+A12:2011

Safety of Information Technology Equipment

EN 62311: 2008

Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz-300 GHz)

(IEC 62311:2007 (Modified))

EN 300 328 V1.8.1 (2012);

Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Harmonized EN covering

essential requirements under article 3.2 of the R&TTE Directive

EN 301 893 V1.7.1: (2012)

Broadband Radio Access Networks (BRAN); 5 GHz high performance RLAN; Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive

EN 301 489-1 V1.9.2 (2011)

Electromagnetic compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements

EN 301 489-17 V2.2.1 (2012)

Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment National Authorities were informed according to Article 6.4 of Frequency Notification.

Special Requirements are considered. The product is labeled with CE Marking.



☑ Český [Czech]	[Jméno výrobce] tímto prohlašuje, že tento [typ zařízení] je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
☑ Dansk [Danish]	Undertegnede [fabrikantens navn] erklærer herved, at følgende udstyr [udstyrets typebetegnelse] overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
☑ Deutsch [German]	Hiermit erkläre [Name des Herstellers], dass sich das Gerät [Gerätetyp] in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
☑ Eesti [Estonian]	Käesolevaga kinnitab [tootja nimi = name of manufacturer] seadme [seadme tüüp = type of equipment] vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
☑ English	Hereby, [name of manufacturer], declares that this [type of equipment] is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
☑ Español [Spanish]	Por medio de la presente [nombre del fabricante] declara que el [clase de equipo] cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
☑ Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΙΑ [name of manufacturer] ΔΗΛΩΝΕΙ ΟΤΙ [type of equipment] ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
☑ Français [French]	Par la présente [nom du fabricant] déclare que l'appareil [type d'appareil] est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
☑ Italiano [Italian]	Con la presente [nome del costruttore] dichiara che questo [tipo di apparecchio] è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviski [Latvian]	Ar šo [name of manufacturer / izgatavotāja nosaukums] deklarē, ka [type of equipment / iekārtas tips] atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo [manufacturer name] deklaruoją, kad šis [equipment type] atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
☑ Nederlands [Dutch]	Hierbij verklaart [naam van de fabrikant] dat het toestel [type van toestel] in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
☑ Malti [Maltese]	Hawnhekk, [isem tal-manifattur], jiddikjara li dan [il-mudel tal-prodott] jikkonforma mal-htigijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Direttiva 1999/5/EC.
☑ Magyar	Alulírott, [gyártó neve] nyilatkozom, hogy a [... típus] megfelel a vonatkozó