

Smartball Slim

User Manual

DEAR CUSTOMER

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or using this product. Please keep this manual for future reference.

Smart ball Slim

This product is compact and easy to take. With the latest Bluetooth 4.0 technology, it is stable performance and low power consumption, and its standby quiescent current consumption is only 3uA. It could be paired with the app and bind your iphone or other smartphones which revision should be Android4.3 or above.

It can be used for wireless self-timer, also used for anti-lost and looking for valuables (such as children, purses, pets, briefcases, luggage, etc). It can also look for your phone.

Advantages

- **Ultra-low power consumption:** Shutdown consumes 3uA, normal operating current is 20 ~ 45uA, a CR2016 battery can be used for 3 months.
- **Joy of Self-timer:** With the app, the wireless camera remote makes it easy to take "hands-free" photos from your smartphone. Just set up your phone, start the camera app, and then click the product to capture the shot
- **Bidirectional search:** Do not worry about your valuables (including phone) were missing, as long as the connection is under the range, both will automatically trigger alert.
- **Alarm Reminder:** Once entering an alarm status, your phone will play alert ringing repeatedly.

Features

- Wide application
- Small and beautiful, easy to take
- Bi-directional Anti-lost Function
- Ultra-low power dissipation; green and environment protect.
- Wireless Autodyne Shutter
- The power supply is CR2016, and the standby time is long.
- Suitable for IOS 5.1 and Android 4.3 above (Include IOS 6.0 and Android 4.3)

Application: iphone5/iphone5s/iphone4s/Samsung NOTE 3/ Huawei B199/ZTE Red Bull V5/HTC One max 8088/ Coolpad K1 (7620L) / Samsung S7272C /Sony M2...

Package Includes

- 1) Main unit X1 (The battery is placed separately)
- 2) User Manual X1
- 3) Lanyard X1

SPECIFICATIONS

Smartball Slim

Specifications

Overview/ Basic parameters	
Model	01
Features	Anti-lost Function; Finding Function; self-shot
Dimensions	32mm*32mm*7mm
Weight	10g
Color	White
Operating System	IOS 5.1 or later; android 4.3 or later
Compatible Devices	iphone 5/ iphone 5s/ iphone 4s/ Samsung NOTE 3/ Huawei B199/ ZTE V5/ HTC One max 8088/ Coolpad K1 (7620L) / Samsung S7272C / SONY M2 ...
Hardware Specifications	
Battery Capacity	85mAH (removable button battery)
Communication Method	Bluetooth 4.0 BLE mode only
Shutdown Current	3uA
Operating Current	20-45uA
Battery Life under shutdown condition	3 years
Battery Life under continuous operating condition	3 months
Indicate Method:	Red/ Green LED indicator; Buzzer
Device Specifications	None

Product Show & QR Code



Android Client



iOS Client

Connection and Operation

Usage method

1. Battery Installation

Open the back cover, and put the CR2016 battery into the battery case, the back of battery is upwards, close the back cover.

2. Remove the battery

Open the battery cover and remove the CR2016 battery.

3. Connection status

A) If the product is turned off, long press the product two seconds, enter the power-on status, the green light flashes three times.

B) Click APP "switch" icon. Connect with the device at the first time, need to choose the product you used and after that, it will be connected to the device automatically when you click the icon.

C) Once the connection is successful, the light of product glows green once, and the buzzer sounds once.

D) In connected status, press the product each time, the green light will flash once.

4. Disconnect status

In connection status, click on the APP "switch" icon, enter the disconnected state, the red light flashes three times, and as long as the light flashes each time, the buzzer will alarm once.

5. Shutdown status

In boot mode, long press the product two seconds, enter the shutdown status, the red light flashes twice quickly.

6. Alarm status

In alarm status, double-click on the product, or click "Stop Alarm" button on APP

Wireless Self-timer

Enter the APP camera interface, in connected status, click the product, can be photographed.

7. Bi-directional seeking

Seek for your phone: in connected status, double-click on the product, your phone gets into bright screen and enters an alarm status, the alarm sound plays in a loop.

CONNECTION

Smartball Slim

Seek for this product: Go to "find the ball" interface, phone signal strength can reaction the distance between your phone and product; meanwhile, every five seconds, green light of the product flashes once and buzzer sounds one second.

8. Rename the product

In the setup interface, you can change the name of the product, up to 14 characters at most and can only enter letters, numbers, and the underscore.


9. Alarm ringtone

In the setup interface, you can adjust the volume, and select one type of ringtone.

Matters need attention

1. Please use the product according to the user manual.
2. Please do not let the product near the fire, such as stove, candles, etc
3. Do not expose the product to extreme temperature environment
4. Do not let the product soaked into liquid, keep it away from the swimming pool, bathtub, etc
5. Do not wash the product by using corrosive cleaner.

CONNECTION DIAGRAM

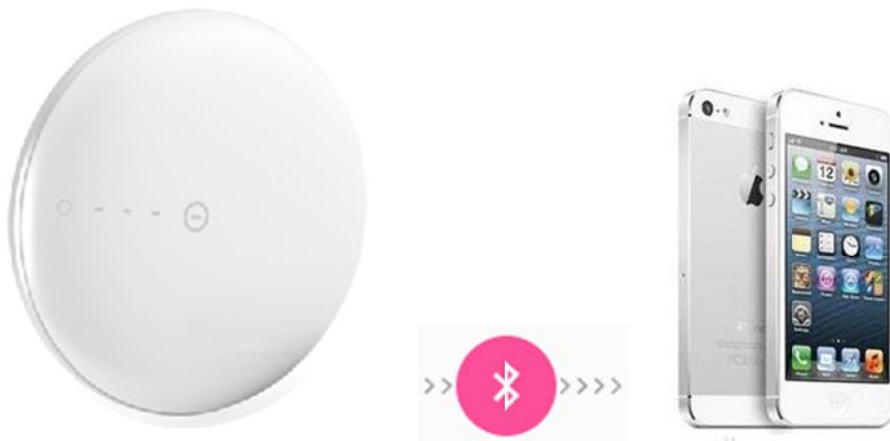

P/N9001

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.