

# G2

GPS Kidsafe Watch

GSM 2G Network



## USER'S MANUAL

Please read this user's manual carefully before use

Thank you for purchasing this product. In case of a malfunction, please refer to the support information at the end of this manual. We highly appreciate any feedback which helps us to improve our products. Please keep this instruction manual for future reference.

### FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### FCC RF Exposure Statement

The SAR values found for the WATCHU are below the maximum recommended levels of 1.6W/Kg as averaged over any 1g tissue for Mouth-worn and 4.0W/Kg averaged over any 10g tissue for Wrist-worn as according to the KDB 447498 D01.

This Smartwatch with FCC ID: 2AJ29-WATCHUGPS1 has also been tested against this SAR limit. The highest values for Mouth-worn and Wrist-worn are 0.759 W/kg, and 1.803 W/kg respectively. This device was tested for Mouth-worn operations with the front of the watch kept 10mm from the mouth. In addition this device was tested for Wrist-worn operations with the back of the watch at 0mm distance to the wrist. The use of accessories (with or without metallic components) are not assumed to be used for watches, and shall therefore not be used.

### About G2

#### Info

G2 is a smart mobile watch with GPS/AGPS/LBS/WIFI tracker treasured by Kids 4-12 and loved by parents. It's a wrist watch mobile phone equipped with GPS tracker and SOS function. With G2, parents can always keep track of their kids' location on a Google map and give them a call or send them voice message. A child can also make calls or send voice message to the pre-set numbers by a touch of a button. G2 is easily controlled via free App 'iCare++' available both on AppStore and GooglePlay.

### Features

- GPS/AGPS/LBS/WIFI precise tracking
- Dual-way phone calls
- Read and send voice message
- Instant location/Route playback
- Notification when the watch leaves pre-set Geo zone
- SOS function with dedicated button
- Pre-set 26 family numbers
- Frequency: GSM 850/900/1800/1900
- SIM card: Micro-SIM with voice and GSM (2G) internet
- Shake-shake to make friends
- IPX5 dust and splash protection
- Built-in speaker, microphone
- ELLP™ ultra-low power consumption
- Environment friendly safety material


### Warranty

This product is guaranteed by the manufacturer for a period of 1 year from the date of purchase. This guarantee does not cover defects arising from accidental damage, misuse or wear and tear and is available only to the original purchaser of the product. This does not affect your statutory rights.


### Contents of the package

- GPS Watch Unit
- USB Charging Cable
- User's Manual

### Watch elements




### Display Information



### Watch charging

This GPS Watch features a built-in rechargeable battery. To charge it, you need to use the charging cable which has been supplied with the device.

To protect the battery, please charge the watch at least 12h for the first time using and over 8h for the second and third time.



### SIM card install

This Watch relies on GPS technology and modern mobile devices. In order for these to work it requires a Micro SIM card with a 2G data, talk and text plan included. Make sure that the card is already registered with your operator and take careful note of the sim card phone number. Make sure the SIM card, which you intend to use, does not require a PIN code to work



NOTE: The first time you use your watch the information on the screen is not correct. You may need to wait a few minutes for the time to reset to your time zone.

### How to Use the Watch

#### Without SIM card, it works as a watch

- 1) Long press the Power/SOS button to turn ON the watch.
- 2) Long press the Power/SOS button about 3 seconds to turn OFF the watch.

#### With SIM card, it acts as a mobile phone after power on

- 1) Power OFF the watch and insert the Micro SIM card then close the rubber plug.
- 2) Light up the watch display screen to check the time, date, weeks and steps.
- 3) Watch face: switch the two different watch face by double press the Power/SOS button.

Tips: Please make sure the SIM card has the functions of Caller ID Display, SMS and GPRS mobile data flow.

### Functions

#### SOS

Long press the SOS button for 3 seconds, the watch will automatically send the current location to the SOS contact list and the watch will continually dial the SOS number list for 3 times until the phone get through successfully. Press the Power/SOS button to hang up the phone call.

#### Make a phone call to Pre-set Numbers

- 1) Long press "Phone Call Button", directly call the "administrator"
- 2) "Phone Call Button": Press TWICE to enter the phonebook. Press ONCE to flip over the contact list. Long press to dial-out the phone call.

"Power/SOS Button": press to exit from phonebook page / hang up the phone call. Long press the "Phone Call Button", it will automatically call the contact list pre-set in the watch. Press the "Power/SOS button" to hang up the phone call.

#### Answer a phone call on the Watch

Press "Phone Call Button/Voice Message Button" to answer the phone call from family members pre-set. Press the "Power/SOS Button" to hang up the phone call.

#### Send Voice message from Watch


A. "Shake-shake to make friends": Long press "Voice Message Button" to enter the voice message function, and shake two watches at the same time to add each other into the voice message contact list.

B. "Send voice messages": Double press "Voice Message Button" to enter the voice message contact list and press the button again to choose the phone number. Keep long press "Voice Message Button" to record your voice message and move away your finger, then the message will be send out.

C. "Read voice message": The voice message icon will appear when you receive a voice message from your friends or family contact list, press "Voice Message Button" to read the voice message.

### How to Turn OFF the watch with the SIM Card inside

1. Keep press the "Voice Message Button" first and then press the "Power/SOS Button" at the same time (long press more than 5 seconds).
2. The administrator can remote to turn off the watch via the "watch settings" on the APP.



### About APP


#### Download APP

Method 1: Search for "iCare++" in Google play or App Store, download and install the APP.  
Method 2: Open the browser to enter [app.soft-iot.com](http://app.soft-iot.com), click G2 for App download.



#### Registration


- 1) Install and open the APP after download
- 2) Click the "Registration" button, enter the registration page. Fill in your phone number and the password to finish the registration step by step.



### APP operation

#### Message Center

Press the icon in the main screen, it will turn to the message page and shows all the messages from the watch and system.



### How to Add Device

- 1) Connect your phone with WIFI or switch ON your mobile data to get the internet connection.
- 2) Fill in account number & password, then enter the APP interface and choose watch model.
- 3) Click the icon on the right head to add the G2 Watch and bind the device to start.
- 4) Scan the QR-code on the back of G2 watch or the below QR Code to add device or fill in the CID number on the gift box or warranty card to add device



\* Please do keep this QR Code for devices addition



- \* The first account connected with the watch will default to its administrator.
- \* You can add the device as many as you want.

### Main Screen


1. After logging in, you will see the main screen as below. It shows your added device with some information such as the name / date / hours and the precise location and the main functions of the watch.



### Fence List

A "Fence" is a virtual boundary for a zone which the GPS Watch is not supposed to leave. For example if you use the GPS Watch device on your child, you could set up a geo-fence around your house or school to get an alert if your child leaves the area.

Press the icon  to set Geo-fence. Press  to add or edit the detail information

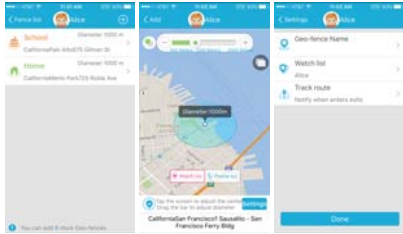


### Family List

This GPS Watch allows 26 family numbers including the administrator

present in the contact list. Press the icon  to enter the setting page.


Then click "+" on the right top of the page to add contact number, shows as below.



To edit or delete the current existed family members, please choose the numbers and long press at the mobile screen and the edit page will be shown as below:





### Watch Settings

Press the icon  to enter the watch settings page, shows as below. You can manage the watch here according to your needs.



### Change the account


Press the icon  , you can change your password and login with another account by pressing "Quit" button. Shows as below:




### Update APP

Press the icon  , to update the APP


### About US

Press the icon  to get more information about the APP




### Loc

Press the icon  to check the precise position of the watch. Also, you can change the map model: satellite map, 2D map, 3D map by pressing the icon  on the right hand.




### Track


Press the icon  , you can check the track history of the watch by setting "start date" and "end date". Please keep the "PathLine" button on to show the track on the map. Please do not turn on the "LBS&WiFi" button, otherwise the track line shows on the map will be hard to tell.




### Voice Message


Press the icon  to check messages send from the watch.

Also, you can click the "hold to talk" button at the bottom of the page to send voice messages to the watch. If you want to delete the voice message already sent out, long press  .

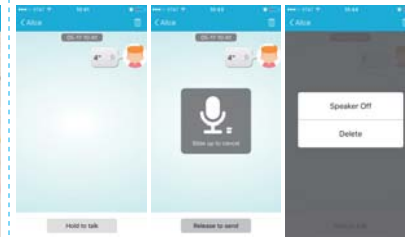


### Dial

Press the icon  to make a phone call to the watch. Shows as below:




### Guard

Press the icon  , you can hear the environment around the watch to ensure the safety of your child.



### Steps

Press the icon  to check watch steps of today and last 7 days. As below:



### Specifications

- Dimension: 41\*41\*16.5mm
- Screen size: AA 24mm
- Weight: about 42g
- Chipset: MTK6261
- GPS/AGPS: u-BLOX 7020
- G-sensor: BOSCH BMA250E
- Operating System: NUCLEUS
- Support: LBS, GPS/AGPS, WIFI
- Frequency: GSM/GPRS 850+1900+ 900+1800MHz
- GPRS/WAP/MMS: GPRS CLASS 12
- Flash: 32M bit
- RAM: 32M bit
- Antenna: built-in GSM&GPS antenna
- Battery: Li-Po 430mAh
- Working time: 75-90 hours
- GSM talking time: >2 hours

### FAQ

#### Q: How to turn ON/OFF the watch?

- A: (1) Press the power button for 3 seconds to turn on the watch. If it fails, please charge the watch and try again later.  
 (2) Keep press the "Voice Message Button" first and then press "Power/SOS Button" at the same time to turn off the watch;  
 Or turn off the watch via the "watch settings" in the operation APP if you're the administrator.  
 (3) If the watch is without SIM Card, please long press the "Power/SOS Button" to turn off the watch.

#### Q: What to do if the QR code doesn't work?

- A: If the QR code doesn't work, please try again in a bright place or adjust the distance between your phone camera and the QR code.

#### Q: Mobile system for Operation APP?

- A: IOS 7.0+ ; Android 4.0+

#### Q: Why does some people can not reach the watch by phone call?

- A: (1) To protect the privacy and safety of its owner, only the relatives, administrator and the pre-set contact list people can make a phone call to the watch.  
 (2) If there is a private cornet between the administrator and the watch, please add it to the contact list at first.

#### Q: How to change the administrator?

- A: Log in the APP with the administrator's account, enter the "family member" page. Long press the new administrator number and click " Transfer Administrator Right" in the appeared page to finish the operation.

#### Q: How to delete family member?

- A: Log in the APP with the administrator's account, enter the "family member" page. Long press the member you need to remove and click "delete" in the appeared page to finish the operation.

#### Q: Why the watch is hot sometimes?

- A: It happens when the watch is in charging.

### Cautions

1. Please do not wash the watch or put the watch in the water or take bath with the watch.
2. Please keep the watch away from fire and high temperature.
3. Please remind kids do not eat the watch.
4. The GPS will not work when the watch is power off, the SIM card is in arreange or GSM is out of service.
5. Make sure the SIM Card has "Caller ID display" service for using the phone call and voice monitor function.