



PRODUCT SPECIFICATION

Version 1.3

IEEE 802.11 a/b/g/n/ac 2T/2R Dual Band USB Module Integrated Bluetooth v4.2

Model Number: WCT3EM2611
(MediaTek : MT7662TU)

客户认可 Custom Approval Section	
Custom Name	
Department	
Approval	Date:

拟制 DESIGN	审核 CHECK	批准 APPROVAL
秦楠	陈宇科	熊运自
2016-06-12	2016-06-12	2016-06-12

惠州高盛达科技有限公司
HUIZHOU GAOSHENGDA TECHNOLOGY CO.,LTD

中国惠州仲恺高新技术开发区华宇路 75 号
HUA YU RD., NO.75, ZHONGKAI HIGH-TECH DEVELOPMENT AREA, HUIZHOU, CHINA
TEL: (0752) 2096849 E-mail: qinnan@gaosd.cn



PRODUCTS SPECIFICATION

WCT3EM2611

Document revision history

Revision	Date	Approved by	Remarks
Version 1.0	2015-12-02		Draft
Version 1.1	2016-05-12		Update: BT 天线图片 WIFI Antenna Height
Version 1.2	2016-06-12		Update: Product Picture BT Antenna Length
Version 1.3	2016-06-30		去掉 BT 天线图片;BT 改为 V4.2



1. General Description

This document is to specify the product requirements for 802.11 **a/b/g/n/ac** USB Module. This Card is based on MediaTek MT7662TU chipset that complied with IEEE 802.11b/g/n ,and it is also backward complied with IEEE 802.11a standard from 5.15~5.825GHz wideband and IEEE 802.11b/g standard from 2.4~2.5GHz. It can be used to provide up to 54Mbps for IEEE 802.11a and IEEE 802.11g, 11Mbps for IEEE 802.11b and 150Mbps for IEEE 802.11n and 866.7Mbps for IEEE 802.11ac to connect your wireless LAN. The Bluetooth part supports latest 4.2+HS operation.

This module can only be configured as a client in all NII bands where it operates using passive scanning techniques.

2. Features

- Compatible with IEEE 802.11a standard to provide wireless 54Mbps data rate.
- Compatible with IEEE 802.11b standard to provide wireless 11Mbps data rate.
- Compatible with IEEE 802.11g standard to provide wireless 54Mbps data rate.
- Compatible with IEEE 802.11n standard to provide wireless 300Mbps data rate.
- Compatible with IEEE 802.11ac standard to provide wireless 866.7Mbps data rate.
- Operation at 2.4~2.5GHz and 5.15~5.825GHz frequency band to meet worldwide regulations
- Bluetooth v4.2 Low Energy(LE);
- Bluetooth specification v2.1+EDR;
- Support wireless data encryption with 64/128-bit WEP for security
- Support infrastructure networks via Access Point and ad-hoc network via peer-to-peer communication
- Drivers support Windows 2000,XP,
- ROHS compliant

3. Application Diagrams

3.1 Functional Block Diagram

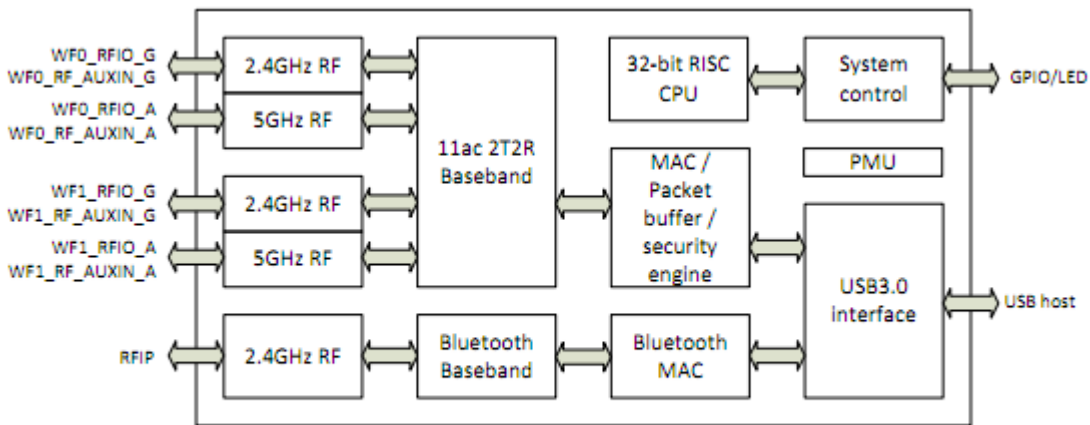


Figure 1 MT7662U block diagram

3.2 General Requirements

3.2.1 IEEE 802.11b Section

	Feature	Detailed Description
3.2.1.1	Standard	<ul style="list-style-type: none"> IEEE 802.11b
3.2.1.2	Radio and Modulation Schemes	<ul style="list-style-type: none"> DQPSK , DBPSK , DSSS , and CCK
3.2.1.3	Operating Frequency	<ul style="list-style-type: none"> 2400 ~ 2497MHz ISM band
3.2.1.4	Channel Numbers	<ul style="list-style-type: none"> 11 channels for United States 13 channels for Europe Countries 14 channels for Japan
3.2.1.5	Data Rate	<ul style="list-style-type: none"> 11,5.5,2,and 1Mbps
3.2.1.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK
3.2.1.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power at each RF chain,Data Rate and at room Temp. 25°C 17dBm(±2dB) at 1,2,5.5,11Mbps



PRODUCTS SPECIFICATION

WCT3EM2611

3.2.1.8	Receiver Sensitivity at Antenna Connector	<ul style="list-style-type: none"> • Typical Sensitivity at Which Frame(1000-byte PDUs)Error Rate=8% • -76 dBm at 2Mbps • -76 dBm for 11Mbps
---------	---	---

3.2.2 IEEE 802.11g Section

	Feature	Detailed Description
3.2.2.1	Standard	<ul style="list-style-type: none"> • IEEE 802.11g
3.2.2.2	Radio and Modulation Type	<ul style="list-style-type: none"> • QPSK , BPSK , 16QAM ,64QAM with OFDM
3.2.2.3	Operating Frequency	<ul style="list-style-type: none"> • 2400 ~ 2483.5MHz ISM band
3.2.2.4	Channel Numbers	<ul style="list-style-type: none"> • 11 channels for United States • 13 channels for Europe Countries • 13 channels for Japan
3.2.2.5	Data Rate	<ul style="list-style-type: none"> • 6,9,12,18,24,36,48,54Mbps
3.2.2.6	Media Access Protocol	<ul style="list-style-type: none"> • CSMA/CA with ACK
3.2.2.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> • Typical RF Output Power(tolerance\pm2dB) at each RF chain, Data Rate and at roomTemp. 25$^{\circ}$C • +17 dBm at 6,9Mbps • +16 dBm at 12,18Mbps • +15 dBm at 24,36Mbps • +14 dBm at 48,54Mbps
3.2.2.8	Receiver Sensitivity at Antenna Connector	<ul style="list-style-type: none"> • Typical Sensitivity at each RF chain. Frame(1000-byte PDUs)Error Rate<10% at room Temp 25$^{\circ}$C • -82 dBm at 6Mbps • -81 dBm at 9Mbps • -79 dBm at 12Mbps • -77 dBm at 18Mbps • -74 dBm at 24Mbps • -70 dBm at 36Mbps • -66 dBm at 48Mbps • -65 dBm at 54Mbps

3.2.3 IEEE 802.11a Section

	Feature	Detailed Description
3.2.3.1	Standard	<ul style="list-style-type: none"> IEEE 802.11a
3.2.3.2	Radio and Modulation Type	<ul style="list-style-type: none"> QPSK , BPSK , 16QAM ,64QAM with OFDM
3.2.3.3	Operating Frequency	<ul style="list-style-type: none"> 5.15~5.35GHz and 5.725~5.825GHz for US and Canada 5.15~5.35GHz and 5.47~5.725GHz for Japan 5.15~5.35GHz and 5.47~5.725GHz for Europe 5.725~5.825GHz for China
3.2.3.4	Channel Numbers	<ul style="list-style-type: none"> 12 non-overlapping channels for US and Canada 8 non-overlapping channels for Japan 19 non-overlapping channels for Europe 4 non-overlapping channels for China
3.2.3.5	Data Rate	<ul style="list-style-type: none"> 6,9,12,18,24,36,48,54Mbps
3.2.3.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK
3.2.3.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power(tolerance ± 2dB) at each RF chain, Data Rate and at roomTemp. 25°C +14 dBm at 6,9Mbps +13 dBm at 12,18Mbps +12 dBm at 24,36Mbps +11 dBm at 48,54Mbps
3.2.3.8	Receiver Sensitivity at Antenna Connector	<ul style="list-style-type: none"> Typical Sensitivity at each RF chain. Frame(1000-byte PDUs)Error Rate<10% at room Temp 25°C -82 dBm at 6Mbps -81 dBm at 9Mbps -79 dBm at 12Mbps -77 dBm at 18Mbps -74 dBm at 24Mbps -70 dBm at 36Mbps -66 dBm at 48Mbps -65 dBm at 54Mbps



PRODUCTS SPECIFICATION

WCT3EM2611

3.2.4 IEEE 802.11n Section

	Feature	Detailed Description																																																	
3.2.4.1	Standard	<ul style="list-style-type: none"> IEEE 802.11n 																																																	
3.2.4.2	Radio and Modulation Type	<ul style="list-style-type: none"> BPSK , QPSK , 16QAM ,64QAM with OFDM 																																																	
3.2.4.3	Operating Frequency	<ul style="list-style-type: none"> 2.4GHz band:2400 ~ 2483.5MHz 5GHz and:5150 ~ 5825MHZ 																																																	
3.2.4.4	Data Rate	<table border="1"> <thead> <tr> <th rowspan="2">MCS</th> <th colspan="2">GI=800ns</th> <th colspan="2">GI=400ns</th> </tr> <tr> <th>20MHz</th> <th>40MH</th> <th>20MHz</th> <th>40MHz</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>6.5</td> <td>13.5</td> <td>7.2</td> <td>15</td> </tr> <tr> <td>1</td> <td>13</td> <td>27</td> <td>14.4</td> <td>30</td> </tr> <tr> <td>2</td> <td>19.5</td> <td>40.5</td> <td>21.7</td> <td>45</td> </tr> <tr> <td>3</td> <td>26</td> <td>54</td> <td>28.9</td> <td>60</td> </tr> <tr> <td>4</td> <td>39</td> <td>81</td> <td>43.3</td> <td>90</td> </tr> <tr> <td>5</td> <td>52</td> <td>108</td> <td>57.8</td> <td>120</td> </tr> <tr> <td>6</td> <td>58.5</td> <td>121.5</td> <td>65.0</td> <td>135</td> </tr> <tr> <td>7</td> <td>65</td> <td>135</td> <td>72.2</td> <td>150</td> </tr> </tbody> </table>	MCS	GI=800ns		GI=400ns		20MHz	40MH	20MHz	40MHz	0	6.5	13.5	7.2	15	1	13	27	14.4	30	2	19.5	40.5	21.7	45	3	26	54	28.9	60	4	39	81	43.3	90	5	52	108	57.8	120	6	58.5	121.5	65.0	135	7	65	135	72.2	150
		MCS		GI=800ns		GI=400ns																																													
			20MHz	40MH	20MHz	40MHz																																													
		0	6.5	13.5	7.2	15																																													
		1	13	27	14.4	30																																													
		2	19.5	40.5	21.7	45																																													
		3	26	54	28.9	60																																													
		4	39	81	43.3	90																																													
		5	52	108	57.8	120																																													
6	58.5	121.5	65.0	135																																															
7	65	135	72.2	150																																															
3.2.4.5	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK 																																																	
3.2.4.6	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power(tolerance±2dB) at each RF chain,Data Rate and at roomTemp. 25°C 																																																	
		<table border="1"> <tr> <td> <ul style="list-style-type: none"> 2.4GHz Band/HT20 +14dBm at MCS0~7 </td> <td> <ul style="list-style-type: none"> 2.4GHz Band/HT40 +14dBm at MCS0~7 </td> </tr> <tr> <td> <ul style="list-style-type: none"> 5GHz Band/HT20 +11dBm at MCS0~7 </td> <td> <ul style="list-style-type: none"> 5GHz Band/HT40 +11dBm at MCS0~7 </td> </tr> </table>	<ul style="list-style-type: none"> 2.4GHz Band/HT20 +14dBm at MCS0~7 	<ul style="list-style-type: none"> 2.4GHz Band/HT40 +14dBm at MCS0~7 	<ul style="list-style-type: none"> 5GHz Band/HT20 +11dBm at MCS0~7 	<ul style="list-style-type: none"> 5GHz Band/HT40 +11dBm at MCS0~7 																																													
		<ul style="list-style-type: none"> 2.4GHz Band/HT20 +14dBm at MCS0~7 	<ul style="list-style-type: none"> 2.4GHz Band/HT40 +14dBm at MCS0~7 																																																
<ul style="list-style-type: none"> 5GHz Band/HT20 +11dBm at MCS0~7 	<ul style="list-style-type: none"> 5GHz Band/HT40 +11dBm at MCS0~7 																																																		
<p>Typical Sensitivity at each RF chain at Which Frame(1000-byte PDUs)Error Rate=10% and at room Temp. 25°C</p> <table border="1"> <tr> <td> 2.4GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 </td> <td> 2.4GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 </td> </tr> <tr> <td> 5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 </td> <td> 5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 </td> </tr> </table>	2.4GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	2.4GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 	5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																															
2.4GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	2.4GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																																		
5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																																		
3.2.4.7	Receiver Sensitivity at Antenna Connector	<table border="1"> <tr> <td> 2.4GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 </td> <td> 2.4GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 </td> </tr> <tr> <td> 5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 </td> <td> 5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 </td> </tr> </table>	2.4GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	2.4GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 	5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																													
2.4GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	2.4GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																																		
5GHz Band/HT20 <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 	5GHz Band/HT40 <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 																																																		

3.2.5 IEEE 802.11ac Section

	Feature	Detailed Description						
3.2.5.1	Standard	<ul style="list-style-type: none"> IEEE 802.11ac 						
3.2.5.2	Radio and Modulation Type	<ul style="list-style-type: none"> QPSK , BPSK , 16QAM ,64QAM,256QAM with OFDM 						
3.2.5.3	Operating Frequency	<ul style="list-style-type: none"> 5.15~5.35GHz and 5.725~5.825GHz for US and Canada 5.15~5.35GHz and 5.47~5.725GHz for Japan 5.15~5.35GHz and 5.47~5.725GHz for Europe 5.725~5.825GHz for China 						
3.2.5.4	Channel Numbers	<ul style="list-style-type: none"> 12 non-overlapping channels for US and Canada 8 non-overlapping channels for Japan 19 non-overlapping channels for Europe 4 non-overlapping channels for China 						
3.2.5.5	Data Rate	<ul style="list-style-type: none"> at most 433.3 Mbps 						
3.2.5.6	Media Access Protocol	<ul style="list-style-type: none"> CSMA/CA with ACK 						
3.2.5.7	Transmitter Output Power at Antenna Connector	<ul style="list-style-type: none"> Typical RF Output Power(tolerance ± 2dB) at each RF chain, Data Rate and at roomTemp. 25degree C +11 dBm at HT20 / HT40 						
3.2.5.8	Receiver Sensitivity at Antenna Connector	<p>4 Typical Sensitivity at each RF chain. Frame(1000-byte PDUs)Error Rate<10% at room Temp 25 degree C</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">5GHz Band / HT20</th> <th style="width: 50%;">5GHz Band / HT40</th> </tr> </thead> <tbody> <tr> <td> <ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 -59dBm at MCS8 -57dBm at MCS9 </td> <td> <ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 -56dBm at MCS8 -54dBm at MCS9 </td> </tr> <tr> <td> <p>5GHz Band / HT80</p> <ul style="list-style-type: none"> -76dBm at MCS0 -73dBm at MCS1 -71dBm at MCS2 -68dBm at MCS3 -64dBm at MCS4 -60dBm at MCS5 -59dBm at MCS6 -58dBm at MCS7 -55dBm at MCS8 -51dBm at MCS9 </td> <td></td> </tr> </tbody> </table>	5GHz Band / HT20	5GHz Band / HT40	<ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 -59dBm at MCS8 -57dBm at MCS9 	<ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 -56dBm at MCS8 -54dBm at MCS9 	<p>5GHz Band / HT80</p> <ul style="list-style-type: none"> -76dBm at MCS0 -73dBm at MCS1 -71dBm at MCS2 -68dBm at MCS3 -64dBm at MCS4 -60dBm at MCS5 -59dBm at MCS6 -58dBm at MCS7 -55dBm at MCS8 -51dBm at MCS9 	
5GHz Band / HT20	5GHz Band / HT40							
<ul style="list-style-type: none"> -82dBm at MCS0 -79dBm at MCS1 -77dBm at MCS2 -74dBm at MCS3 -70dBm at MCS4 -66dBm at MCS5 -65dBm at MCS6 -64dBm at MCS7 -59dBm at MCS8 -57dBm at MCS9 	<ul style="list-style-type: none"> -79dBm at MCS0 -76dBm at MCS1 -74dBm at MCS2 -71dBm at MCS3 -67dBm at MCS4 -63dBm at MCS5 -62dBm at MCS6 -61dBm at MCS7 -56dBm at MCS8 -54dBm at MCS9 							
<p>5GHz Band / HT80</p> <ul style="list-style-type: none"> -76dBm at MCS0 -73dBm at MCS1 -71dBm at MCS2 -68dBm at MCS3 -64dBm at MCS4 -60dBm at MCS5 -59dBm at MCS6 -58dBm at MCS7 -55dBm at MCS8 -51dBm at MCS9 								

3.2.6 Bluetooth Section

Feather	Description		
General specification			
Bluetooth standard	Bluetooth v4.2 of 1,2,and3 Mbps		
Antenna reference	Small antenna with 0-2 dbi peak gain		
Frequency band	2402MHz-2480Mhz		
Channel Numbers	79 channels		
Modulation	FHSS,GFSK,DPSK,DQPSK		
RF specification			
	Min (dBm)	Type (dBm)	Max (dBm)
Output Power (class 1)	0	4	8
Output Power (class 2)	-6	2	4
Sensitive @BER=0.1% FOR GFSK(1Mbps)		-86	
Sensitive @BER=0.01% FOR π /4-DQPSK(2Mbps)		-86	
Sensitive @BER=0.01% FOR 8DQPSK(3Mbps) Maximum input level		-80	
	GFSK(1Mbps) -20dBm		
	π /4-DQPSK(2Mbps) -20dBm		
	8DQPSK(3Mbps) -20dBm		

4. Electrical and Thermal Characteristics

4.1 Temperature Limit Ratings

Parameter	Minimum	Maximum	Units
Storage Temperature	-40	+80	C
Ambient Operating Temperature	0	60	C
Junction Temperature	0	125	C

4.2 General Section

	Feature	Detailed Description
5.2.1	Antenna Type	<ul style="list-style-type: none"> ● Integrated antenna
5.2.2	Operating Voltage	<ul style="list-style-type: none"> ● 5V±10%
5.2.3	Current Consumption	<ul style="list-style-type: none"> ● <300mA@RX ● <700mA@TX
5.2.4	Form Factor and Interface	<ul style="list-style-type: none"> ● High Speed USB2.0 Interface

4.3 Software



PRODUCTS SPECIFICATION

WCT3EM2611

Driver	Windows XP/ Win7, Linux, MAC
Security	64/128-bits WEP, WPA, WPA2

5. EEPROM Information


BT

Vendor ID	0x0E8D
Product ID	0x76A0

WIFI

Reg Domain	Worldwide 2.4G/5G Read from registry; Control by driver
	Offset 0x38 for 5G:0xFF Offset 0x39 for 2.4G:0xFF
Vendor ID	0x0E8D
Product ID	0x76A0

6 Mechanical Dimensions

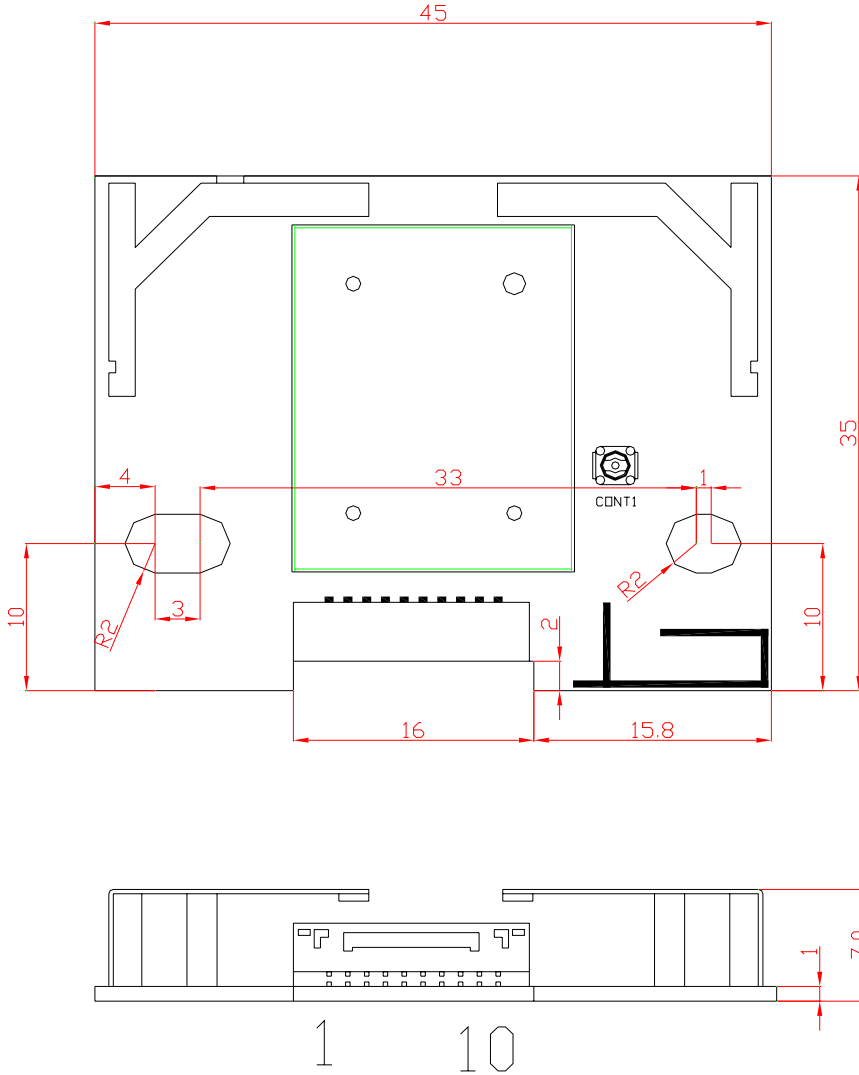

Pin	Symbol	Pin	Symbol
1	BT_SYNC		BT接3D眼镜用
2	DEV_WAKE		主机唤醒WIFI模块, 高电平有效,
3	BT_WAKE		BT唤醒
4	GND		
5	WOW		WIFI唤醒
6	RESET		
7	GND		
8	WL_USB_DP		
9	WL_USB_DN		
10	VDD(+5.0V)		

*TOLERANCES ARE +/-0.5mm UNLESS OTHERWISE SPECIFIED

*UNIT:mm

7 FCC Statement

FCC Important Notes:

(1)

FCC Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.



PRODUCTS SPECIFICATION

WCT3EM2611

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product. Modular could be only used in mobile or fix device, and could not be used in any portable device.

Caution!

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. This device and it's antennas(s) must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.

(2)

Co-location Warning:

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

(3)

OEM integration instructions:

This device is intended only for OEM integrators under the following conditions:

The transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the integral antenna(s) that has been originally tested and certified with this module.

As long as 3 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

(4)

Validity of using the module certification:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

(5)

End product labeling:

The final end product must be labeled in a visible area with the following:

“Contains Transmitter Module FCC ID: 2AC23- WCT3EM2611”.

(6)

Information that must be placed in the end user manual:

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IEEE 802.11b or 802.11g operation of this product in the USA is firmware-limited to channels 1 through 11.

The device for the band 5150-5250 MHz is only for indoor usage to reduce the potential for harmful interference to co-channel mobile satellite systems.