

# Quick Reference Manual 5427

CASIO®

Congratulations upon your selection of this CASIO watch.

Bluetooth® is a registered trademark or trademark of Bluetooth SIG, Inc. of the United States.

Your watch has a Mobile Link function that allows it to communicate with a Bluetooth® SMART mobile phone and adjust its time settings to match those of the mobile phone.

- This product complies with or has received approval under radio laws in various countries and geographic areas. Use of this product in an area where it does not conform to or where it has not been approved under applicable radio laws may be punishable under local laws. For details, visit <http://world.casio.com/ce/BLE/>.
- Use of this product inside of an aircraft is restricted by the aviation laws of each country. Be sure to obey instructions provided by flight personnel concerning use of devices such as this product.

For details about functions, go to the website below and select your language for the ECB-500.

<http://support.casio.com/wat/bs/>



## Using the Watch

### Charging

**Remove the watch from your wrist and place it in a brightly lit area.**

- The watch may become hot when exposed to light for charging. Take care to avoid burn injury.
- Avoid charging in locations where it is very hot.

### Power Saving

- Leaving the watch in a dark location for about one hour between the hours of 10 p.m. and 5:50 a.m. will cause the second hand to stop at 12 o'clock and the digital display to go blank.
- Leaving the watch in a dark location for about one week will cause all hands to stop at 12 o'clock and the digital display to go blank.


### Battery Alerts

- Low Battery  
Second hand jumps every two seconds (Low Battery Alert).
- Dead Battery  
All hands stopped at 12 o'clock.

### Watch Operations

**Use the buttons below to navigate between modes.**

- Hold down **(D)** about two seconds to return to the Timekeeping Mode.

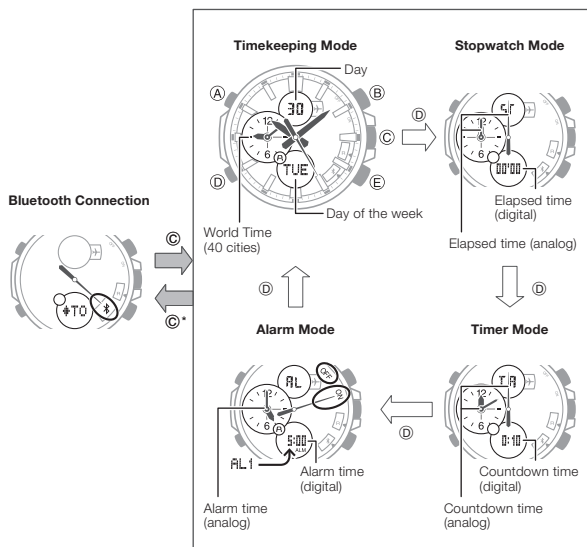

\* Hold down **(C)** for about 0.5 seconds to establish a Bluetooth connection.

## Adjusting the Time and Date Settings

- In the Timekeeping Mode, hold down **(A)** for about two seconds until a city name appears.
- Use **(E)** and **(B)** to scroll through the city names and display the one you want.
- Press **(D)** six times until the seconds digits are flashing.
- Press **(E)** to reset the seconds to 00.
- Use the **(D)** button to move the flashing between the setting items in the following sequence: hour, minute, year, month, day, seconds.
  - Use **(E)** and **(B)** to change the setting of the flashing item.
- To return to the Timekeeping Mode, press **(A)** twice.



## Specifications

Accuracy at normal temperature	: ±15 seconds a month
Analog Timekeeping	: Hour, minute (hand moves every 10 seconds), seconds
Digital Timekeeping	: Hour, minute, seconds; p.m. (P); 12/24-hour timekeeping format; Day, day of the week; Full auto calendar (2000 to 2099); Summer time setting
World Time	: Current time in 40 cities (40 time zones) + UTC (Universal Coordinated Time) time display; Summer time setting; user-added city (one city can be added to the 40 built-in cities), World Time/Home Time swapping
Alarms	: 5 daily alarms Setting units: Hour, minute Alarm duration: 10 seconds
Stopwatch	: Measuring unit: 1/100 of a second (up to 59°59.99") 1 second (from 1:00'00") Measuring capacity: 23:59'59" (24 hours) Measurement functions: Elapsed time, split times
Countdown Timer	: Countdown unit: 1 second Countdown range: 24 hours Setting unit: 1 minute Time up: 10-second beeper
Mobile Link Functions	: Auto Time Correction Time setting adjusted automatically at preset time. Auto summer time switching Automatic switching between standard time and summer time Phone finder Watch operation sounds the alert of the mobile phone. Hand position adjustment Data Communication Specifications Bluetooth® SMART Communication range: 2 meters max. (depends on environment)
Other	: Low battery alert; Auto return to Timekeeping Mode; Power Saving; High-brightness LED light; Selectable illumination duration; Operation tone on/off; Hand shift; Airplane Mode (disables data communication)
Power Supply	: Solar panel and one rechargeable battery
Approximate Battery Life	: 8 months Conditions • Mobile Link: 2 times (3 minutes)/day • Alarm: Once (10 seconds)/day • Illumination: Once (1.5 seconds)/day • Power Saving: 6 hours/day