



MOTOROLA

intelligence everywhere™



MOTOMANUAL

TXTR™ x5

DRAFT 3 – 11/18/2005

Quick Start

To use your TXTR, you need to:

- 1** Charge the TXTR (see page 15).
- 2** Turn on your TXTR (press © key until the display is on).
- 3** Pair your TXTR with your phone (see page 22).
- 4** Send and receive SMS text messages with your phone, or chat with another TXTR user

Export Law Assurances

This product is controlled under the export regulations of the United States of America and Canada. The Governments of the United States of America and Canada may restrict the exportation or re-exportation of this product to certain destinations. For further information contact the U.S. Department of Commerce or the Canadian Department of Foreign Affairs and International Trade.

The use of wireless devices and their accessories may be prohibited or restricted in certain areas. Always obey the laws and regulations on the use of these products.

The TXTR keyboard is a Class 1 Bluetooth device. Bluetooth features and Bluetooth Class 1 power levels are not allowed for outdoor operation in France. To avoid unlawful interference with radio signals, do not use the Bluetooth features in France unless you are indoors.

MOTOROLA and the Stylized M Logo are registered in the US Patent & Trademark Office. The Bluetooth trademarks are owned by their proprietor and used by Motorola, Inc. under license. All other product or service names are the property of their respective owners.

© Motorola, Inc., 2005.

Manual number:6809500A07-0

Contents

Safety and General Information . . .	6
Introduction	11
TXTR Controls	14
Charging TXTR Battery	15
Turning TXTR On & Off	18
Idle Screen	20
Pairing TXTR with Phone	22
Turning On Bluetooth on Phone . .	23
Setting TXTR to Look for Phone . .	24
Pairing Phone with TXTR	24
Pairing to Additional Devices	26
Operating Your TXTR	28
Basic Operation	29
Text Entry	30
Messages	32
Chat	46
Phonebook	51

Calculator	54
Settings.	55

European Union Directives

Conformance Statement	61
--	-----------

Safety and General Information

IMPORTANT INFORMATION ON SAFE AND EFFICIENT OPERATION. READ THIS INFORMATION BEFORE USING YOUR DEVICE.

Users are not permitted to make changes or modify the device in any way. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. See 47 CFR Sec. 15.21.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. See 47 CFR Sec. 15.19(3).

Electromagnetic Interference/Compatibility

Note: Nearly every electronic device is susceptible to electromagnetic interference (EMI) if inadequately shielded, designed, or otherwise configured for electromagnetic compatibility.

Facilities

To avoid electromagnetic interference and/or compatibility conflicts, turn off your device in any facility where posted notices instruct you to do so. Hospitals or health care facilities may be using equipment that is sensitive to external RF energy.

Aircraft

When instructed to do so, turn off your device when on board an aircraft. Any use of a device must be in accordance with applicable regulations per airline crew instructions.

Medical Devices

Hearing Aids

Some devices may interfere with some hearing aids. In the event of such interference, you may want to consult with your hearing aid manufacturer to discuss alternatives.

Other Medical Devices

If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately shielded from RF energy. Your physician may be able to assist you in obtaining this information.

Industry Canada Notice to Users

Operation is subject to the following two conditions: (1) This device may not cause interference and (2) This device must accept any interference, including interference that may cause undesired operation of the device Ref IC RSS 210 Sec. 5.11. The term "IC:" before the certification/registration number only signifies that registration was performed based on a Declaration of Conformity indicating that Industry

Canada technical specifications were met. It does not imply that Industry Canada approved the equipment. See Ref IC Self-Marking 6(f) and RSP-100 Sec. 4.

FCC Notice to Users

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the

interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Introduction

The Motorola TXTR allows you to compose, send, and receive SMS text messages with your Motorola Bluetooth phone using a full QWERTY keyboard. With the TXTR, you can:


- Compose, send and receive SMS text messages.
- Chat directly with other TXTR device users.

To perform messaging tasks, a bluetooth connection is established between the phone and TXTR. Your phone remains in its holster, briefcase, or purse while you use the TXTR.

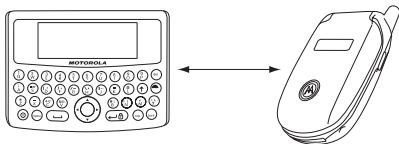


The Bluetooth connection range between the phone and TXTR can be up to 300 feet (exact range is dependent on phone model).

To chat with another TXTR user, a bluetooth connection is established between both TXTR devices.

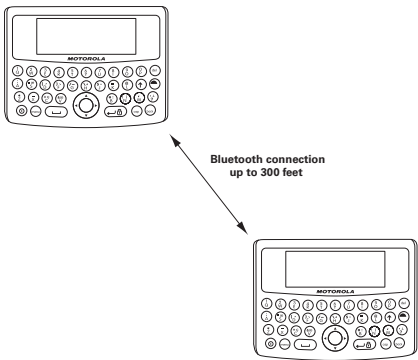

The Bluetooth connection range between the TXTR devices is 300 feet.

TXTR Controls

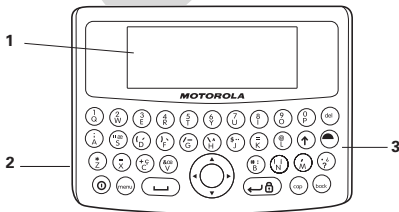

1. Display: Shows text and icons for TXTR.

2. Charging Port: Accepts the plug for your TXTR battery charger.

3. Keypad: Allows you to perform operations with the TXTR.

Charging TXTR Battery

First-Time Use — Before you can use your TXTR, charge its self-contained battery for two hours.

Recharging — When you hear an audio alert along with no bars displayed on the battery meter, the TXTR battery needs recharging.

Over time, batteries gradually wear down and require longer charging times. This is normal. The more you use your TXTR with your phone, the less standby time your battery has.



The rechargeable batteries that power your TXTR must be

disposed of properly and may need to be recycled. Contact your local recycling center for proper disposal methods.

Warning: Never dispose of batteries in a fire because they may explode.

- 1 Plug the Motorola charger into the TXTR's charging port as shown.



- 2 Plug the other end of the charger into an electrical outlet.

During charging, the battery meter flashes until charging is complete. Your TXTR fully charges in approximately two hours. When complete, the battery meter stops

flashing along with three bars displayed on the battery meter.

Note: The TXTR can be used while charging.

- 3** When charging completes, remove the charger from the electrical outlet, and detach the charger from the TXTR.

Note: You can also use a Motorola Original Vehicle Power Adapter to charge the TXTR battery while in your vehicle.

A fully charged battery provides approximately:

- 20 hours of typical messaging time
- hours standby time


Turning TXTR On & Off

To turn on the TXTR, press and hold Ⓞ key for at least 5 seconds until the display is on.

When turned on, the TXTR establishes a connection with your phone. Ensure your phone's Bluetooth feature is turned on and is paired with the TXTR.

Note: If the TXTR is connected to the phone, and a previously paired headset/car kit is turned on, the headset is connected and the TXTR remains disconnected until the headset/car kit is turned off or out of range. Any messages composed on the TXTR during this period are saved as drafts.

When connecting to the phone, the following screen is displayed for a few seconds:



If your phone is not paired with your TXTR, see "Pairing TXTR with Phone" on page 22. The phone and TXTR will not communicate without being paired.

To turn off the TXTR, select **☰ (Main Menu) > Settings > Power Off.**

Idle Screen

Upon connecting to the phone, the **Idle screen** is displayed:



Once connected, the TXTR downloads existing SMS messages and phone book from the phone. Up to 10 of the newest messages are retrieved. When downloading is complete, the TXTR generates an audio alert.

After the initial download of existing messages, the TXTR polls the phone for new messages every 30 seconds. When a new message is received, the TXTR:

- displays a New Message icon on the display,
- generates an audio alert, and
- if at Idle screen, the text “New Message” is displayed for a few seconds.

Pairing TXTR with Phone

Note: You must pair (link) your TXTR and phone before you can send or receive messages.

“Pairing” creates a link between devices with Bluetooth[®] wireless technology, and allows the phone to remember the TXTR’s unique ID. When your TXTR and phone are paired, the TXTR automatically connects to the phone.

To pair (link) your TXTR and phone:

- 1 Start Bluetooth feature on phone.
- 2 Set TXTR to look for phone.

- 3 Pair (link) your phone with your TXTR.

Turning On Bluetooth on Phone

Your phone's Bluetooth feature is off by default. To use your phone with the system, turn on the Bluetooth feature in your Motorola phone.

- 1 On the phone, select **Main Menu > Settings > Connection > Bluetooth Link > Setup.**
- 2 Scroll to **Power.**
- 3 Select **Change.**
- 4 Scroll to **On.**
- 5 Press **Select** to turn on the Bluetooth feature. The Bluetooth

feature remains on until you turn it off.

Setting TXTR to Look for Phone

To place the TXTR into Bluetooth search mode, select  **(Main Menu) > Settings > Bluetooth > Search phone.**

The TXTR is placed in search mode for [xx] seconds.

Pairing Phone with TXTR


While the TXTR is in search mode, place your phone in Bluetooth discovery mode to pair (link) it with your TXTR.

- 1 On your phone, select **Main Menu > Settings > Connection > Bluetooth Link > Setup > Handsfree > Find Me.**

The phone is placed in Discovery mode. After a few moments, a pop-up window is displayed with text "Bond with TXTR?".

- 2 Select **Yes** to pair your TXTR with your phone.
- 3 Enter the passkey: **0000**
- 4 Select **OK**.

When your TXTR successfully pairs with your phone, the Idle screen indicates that the TXTR and phone are connected:



Pairing to Additional Devices

Your TXTR can store pairing information for up to eight different devices with Bluetooth wireless technology. Devices are stored in a “Paired Device List” in memory in the order entered. When an attempt to pair to more than eight devices is made, the oldest paired device is removed from the list.

Any of the eight paired devices can initiate a connection to the TXTR.


The TXTR will automatically initiate a connection (when powered on) only with the **last** device it was **connected to**. If you want to connect the TXTR to another device in the paired device list, you must initiate the connection from that device. Whichever

of the eight devices initiates a connection to the TXTR afterwards, that device then becomes the *last connected* device.

Operating Your TXTR

The TXTR furnishes a combination of keypad and a display screen to send and receive SMS messages.

The keypad consists of 36 keys and a 4-way navigation key. Here's a quick anatomy lesson of the keypad.

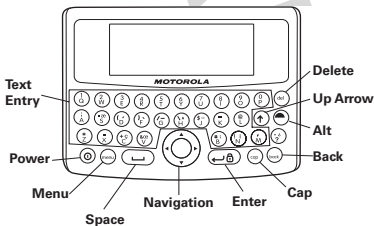

Basic Operation

To perform basic keyboard operations:

Function	Action
Turn TXTR On	Press and hold Power key.
Turn TXTR Off	1 Select ⊖ Main Menu > Settings and press Enter key. 2 Select Power Off and press Enter key.
Access Idle screen	1 Press Menu key. 2 Press Back key.
Access main menu	Press Menu key.
Scroll menu selections	Press Navigation key.

Function	Action (Continued)
Select menu item or perform actions.	Press Enter key.
Back to previous menu	Press Back key.
Lock/unlock keypad	Press both Alt and Enter keys.

Text Entry

To type text entries on your TXTR:

Function	Action
Type lowercase letters	Press letter key.

Function	Action (Continued)
<p>Type uppercase letters</p>	<p>Use Cap key as follows:</p> <ul style="list-style-type: none"> • Press once to type next letter in uppercase. • Press twice to place keypad in uppercase mode. • Press again to disable uppercase mode.
<p>Type numbers and symbol characters</p> <p>Note: Numbers and symbols are smaller on Text Entry keys.</p>	<p>Use Up Arrow key as follows:</p> <ul style="list-style-type: none"> • Press once to type next character as number/symbol. • Press twice to place keypad in number/symbol mode. • Press again to disable number/symbol mode.


Function	Action (Continued)
Type special characters Note: Special characters are blue on Text Entry keys.	Use Alt key as follows: <ul style="list-style-type: none">• Press once to type next special character.• Press twice to place keypad in number/symbol mode.• Press again to disable number/symbol mode.
Delete character	Press Del key.
Type space character	Press Space key.

Messages


Use this section to perform messaging operations with your TXTR.

New Messages

To perform basic operations with new messages.

Function	Action
Reading a new message	<ol style="list-style-type: none"><li data-bbox="443 385 940 560">1 Select  Main Menu > Recent Messages and press Enter key.<li data-bbox="443 575 940 749">2 Select Received Messages and press Enter key.<li data-bbox="443 764 940 1113">3 Select message and press Enter key. The newest messages are displayed at the top of the list. The message is displayed.


Function	Action (Continued)
Sending a new message	<ol style="list-style-type: none"> <li data-bbox="381 165 833 331">1 Select ☰ Main Menu > Create Message and press Enter key. <li data-bbox="381 355 819 463">2 Type message text and press Enter key. <li data-bbox="381 486 860 1166">3 Choose message recipient: <ul style="list-style-type: none"> <li data-bbox="470 623 809 885">• Select One Time Entry and enter phone number of a new contact, then press Enter key, or <li data-bbox="470 908 860 1166">• Select one or more contact names from phonebook using the Space key, then press Enter key. <li data-bbox="381 1189 845 1351">4 Select Send and press Enter key. You see sent message... displayed.


Function	Action (Continued)
Editing a new message (before sending)	<ol style="list-style-type: none"> <li data-bbox="446 165 899 331">1 Select  Main Menu > Create Message and press Enter key. <li data-bbox="446 355 886 463">2 Type message text and press Enter key. <li data-bbox="446 486 926 1059"> 3 Choose message recipient: <ul style="list-style-type: none"> <li data-bbox="536 623 878 885">• Select One Time Entry and enter phone number of a new contact, then press Enter key, or <li data-bbox="536 908 926 1059">• Select contact name from phonebook, then press Enter key. <li data-bbox="446 1083 866 1191">4 Select Edit and press Enter key. <li data-bbox="446 1214 876 1322">5 Edit message text and press Enter key.


Function	Action (Continued)
Saving a new message (before sending)	<ol style="list-style-type: none"> <li data-bbox="381 165 833 331">1 Select ☰ Main Menu > Create Message and press Enter key. <li data-bbox="381 355 819 463">2 Type message text and press Enter key. <li data-bbox="381 486 857 1059">3 Choose message recipient: <ul style="list-style-type: none"> <li data-bbox="470 623 809 885">• Select One Time Entry and enter phone number of a new contact, then press Enter key, or <li data-bbox="470 908 857 1059">• Select contact name from phonebook, then press Enter key. <li data-bbox="381 1083 864 1249">4 Select Draft and press Enter key. You see Saving draft... displayed.

Recent Messages


To perform basic operations with recent messages.


Function	Action
Reading an old message	<ol style="list-style-type: none"><li data-bbox="443 385 940 560">1 Select  Main Menu > Recent Messages and press Enter key.<li data-bbox="443 575 940 808">2 Select Received Messages or Sent Messages and press Enter key.<li data-bbox="443 822 940 997">3 Select message and press Enter key. The message is displayed.


Function	Action (Continued)
Replying to a received message	<ol style="list-style-type: none"> <li data-bbox="381 165 843 331">1 Select  Main Menu > Recent Messages and press Enter key. <li data-bbox="381 356 798 522">2 Select Received Messages and press Enter key. <li data-bbox="381 547 778 655">3 Select message and press Enter key. <li data-bbox="381 679 853 787">4 View message and press Enter key. <li data-bbox="381 812 829 920">5 Select Reply and press Enter key. <li data-bbox="381 944 843 1052">6 Type reply message text and press Enter key. <li data-bbox="381 1077 846 1243">7 Select Send and press Enter key. You see sent message... displayed.


Function	Action (Continued)
Forwarding a recent message	<ol style="list-style-type: none"> <li data-bbox="446 164 899 331">1 Select  Main Menu > Recent Messages and press Enter key. <li data-bbox="446 353 866 579">2 Select Received Messages or Sent Messages and press Enter key. <li data-bbox="446 601 843 710">3 Select message and press Enter key. <li data-bbox="446 732 919 841">4 View message and press Enter key. <li data-bbox="446 863 928 972">5 Select Forward and press Enter key. <li data-bbox="446 994 919 1103">6 View message and press Enter key.


Function	Action (Continued)
Forwarding a recent message (con't)	<p>7 Choose message recipient:</p> <ul style="list-style-type: none"> • Select One Time Entry and enter phone number of a new contact, then press Enter key, or • Select contact name from phonebook, then press Enter key. <p>8 Select Send and press Enter key. You see sent message... displayed.</p>

Function	Action (Continued)
Deleting a recent message	<ol style="list-style-type: none"> <li data-bbox="446 165 899 331">1 Select  Main Menu > Recent Messages and press Enter key. <li data-bbox="446 358 866 579">2 Select Received Messages or Sent Messages and press Enter key. <li data-bbox="446 605 843 710">3 Select message and press Enter key. <li data-bbox="446 736 919 841">4 View message and press Enter key. <li data-bbox="446 867 919 972">5 Select Delete and press Enter key. <li data-bbox="446 998 868 1161">6 Select Yes and press Enter. The message is deleted.

Function	Action (Continued)
Resending a sent message	<ol style="list-style-type: none"> <li data-bbox="381 165 882 336">1 Select  Main Menu > Recent Messages and press Enter key. <li data-bbox="381 355 882 467">2 Select Sent Messages and press Enter key. <li data-bbox="381 486 882 598">3 Select message and press Enter key. <li data-bbox="381 617 882 729">4 View message and press Enter key. <li data-bbox="381 748 882 860">5 Select Re-send and press Enter key.

Function	Action (Continued)
Storing phone number from received message	<ol style="list-style-type: none"> <li data-bbox="446 165 899 331">1 Select  Main Menu > Recent Messages and press Enter key. <li data-bbox="446 355 866 521">2 Select Received Messages and press Enter key. <li data-bbox="446 544 843 652">3 Select message and press Enter key. <li data-bbox="446 675 919 783">4 View message and press Enter key. <li data-bbox="446 806 917 914">5 Select Add Address and press Enter key. <li data-bbox="446 937 861 1045">6 Select Yes and press Enter key. <li data-bbox="446 1068 868 1176">7 Enter name and press Enter key. <li data-bbox="446 1199 899 1307">8 Select number type and press Enter key.e

Function	Action (Continued)
Sending a saved draft message	<ol style="list-style-type: none"><li data-bbox="381 165 832 331">1 Select  Main Menu > Recent Messages and press Enter key.<li data-bbox="381 355 822 463">2 Select Draft and press Enter key.<li data-bbox="381 500 774 608">3 Select message and press Enter key.<li data-bbox="381 631 853 739">4 View message and press Enter key.<li data-bbox="381 762 822 870">5 Select Send and press Enter key.


Function	Action (Continued)
Deleting a saved draft message	<ol style="list-style-type: none"> <li data-bbox="445 167 901 327">1 Select  Main Menu > Recent Messages and press Enter key. <li data-bbox="445 356 885 458">2 Select Draft and press Enter key. <li data-bbox="445 495 844 596">3 Select message and press Enter key. <li data-bbox="445 633 916 735">4 View message and press Enter key. <li data-bbox="445 764 916 866">5 Select Delete and press Enter key.


Function	Action (Continued)
Deleting all stored messages	<ol style="list-style-type: none"><li data-bbox="379 165 882 336">1 Select ☰ Main Menu > Recent Messages and press Enter key.<li data-bbox="379 355 882 525">2 Select Delete All Messages and press Enter key.<li data-bbox="379 544 882 661">3 Select Yes and press Enter key.


Chat

To perform basic operations with the TXTR-to-TXTR chat feature.

Function	Action
Placing TXTR in chat discovery mode	<ol style="list-style-type: none">1 Select ☰ Main Menu > Chat and press Enter key.2 Select Find Me and press Enter key.


Function	Action (Continued)
Searching for TXTR devices to chat	<ol style="list-style-type: none"> <li data-bbox="381 165 835 331">1 Select  Main Menu > Chat and press Enter key. <li data-bbox="381 355 835 463">2 Select Look for Device and press Enter key. <li data-bbox="381 497 835 605">3 Select TXTR device and press Enter key. <li data-bbox="381 628 861 1089">4 Do one of the following: <ul style="list-style-type: none"> <li data-bbox="470 704 861 914">• To connect with TXTR, select Request Connecting and press Enter key. <li data-bbox="470 937 861 1089">• To add to Friends list, select Add to Friends and press Enter key.


Function	Action (Continued)
Searching for TXTR devices to chat (con't)	<ul style="list-style-type: none"> • To add to Block list, select Block and press Enter key. • To remove TXTR from list, select Delete from List and press Enter key,
Chatting with a friend TXTR device	<ol style="list-style-type: none"> 1 Select  Main Menu > Chat and press Enter key. 2 Select Friends and press Enter key. 3 Select TXTR device and press Enter key. 4 Select Request Connecting and press Enter key.


Function	Action (Continued)
Renaming TXTR device	<ol style="list-style-type: none"> <li data-bbox="381 165 860 331">1 Select  Main Menu > Chat and press Enter key. <li data-bbox="381 355 860 463">2 Select Friends and press Enter key. <li data-bbox="381 486 860 594">3 Select TXTR device and press Enter key. <li data-bbox="381 617 860 725">4 Select Rename and press Enter key. <li data-bbox="381 748 860 856">5 Type new name and press Enter key.

Phonebook

To perform basic operations with the phonebook feature.

Function	Action
Adding new contact to phonebook	<ol style="list-style-type: none"><li data-bbox="443 404 899 569">1 Select  Main Menu > Phonebook and press Enter key.<li data-bbox="443 594 899 700">2 Select NEW ENTRY and press Enter key.<li data-bbox="443 725 899 831">3 Type name and press Enter key.<li data-bbox="443 856 899 962">4 Type phone number and press Enter key.<li data-bbox="443 987 899 1093">5 Select number type and press Enter key.

Function	Action (Continued)
Modifying contact information in phonebook	<ol style="list-style-type: none"> <li data-bbox="381 165 833 331">1 Select  Main Menu > Phonebook and press Enter key. <li data-bbox="381 355 847 463">2 Select contact and press Enter key. <li data-bbox="381 486 798 594">3 Select Edit and press Enter key. <li data-bbox="381 617 791 725">4 Type name and press Enter key. <li data-bbox="381 748 833 856">5 Type phone number and press Enter key. <li data-bbox="381 879 806 987">6 Type number type and press Enter key.

Function	Action (Continued)
Adding new phone number to contact in phonebook	<ol style="list-style-type: none"> <li data-bbox="446 165 899 331">1 Select  Main Menu > Phonebook and press Enter key. <li data-bbox="446 358 915 463">2 Select contact and press Enter key. <li data-bbox="446 489 874 594">3 Select New and press Enter key. <li data-bbox="446 620 902 725">4 Type phone number and press Enter key. <li data-bbox="446 751 899 856">5 Select number type and press Enter key.


Function	Action (Continued)
Deleting contact from phonebook	<ol style="list-style-type: none"><li data-bbox="381 165 882 336">1 Select ☰ Main Menu > Phonebook and press Enter key.<li data-bbox="381 355 882 467">2 Select contact and press Enter key.<li data-bbox="381 486 882 598">3 Select Delete and press Enter key.<li data-bbox="381 617 882 729">4 Select Yes and press Enter key.



Calculator



To perform basic operations with the calculator feature.



Settings


To customize settings for your TXTR:



Function	Action
Placing TXTR in Bluetooth search mode	<ol style="list-style-type: none"><li data-bbox="443 352 940 525">1 Select  Main Menu > Settings and press Enter key.<li data-bbox="443 540 940 656">2 Select Bluetooth and press Enter key.<li data-bbox="443 671 940 787">3 Select Search phone and press Enter key.

Function	Action (Continued)
Viewing TXTR Bluetooth Device Address (BDA)	<ol style="list-style-type: none"> <li data-bbox="381 161 882 336">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="381 350 882 467">2 Select Bluetooth and press Enter key. <li data-bbox="381 481 882 725">3 Select Bluetooth Address and press Enter key. You see address displayed.
Enabling audio alert	<ol style="list-style-type: none"> <li data-bbox="381 729 882 904">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="381 918 882 1035">2 Select Audio Alert and press Enter key. <li data-bbox="381 1049 882 1176">3 Select On and press Enter key.

Function	Action (Continued)
Enabling battery save mode	<ol style="list-style-type: none"> <li data-bbox="446 164 948 336">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="446 355 948 527">2 Select Backlight Timeout and press Enter key. <li data-bbox="446 546 948 659">3 Select On and press Enter key.
Changing display language	<ol style="list-style-type: none"> <li data-bbox="446 674 948 845">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="446 864 948 978">2 Select Language and press Enter key. <li data-bbox="446 997 948 1110">3 Select language and press Enter key.

Function	Action (Continued)
Changing TXTR device name	<ol style="list-style-type: none"> <li data-bbox="381 165 875 331">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="381 355 875 463">2 Select Device Name and press Enter key. <li data-bbox="381 486 875 594">3 Type device name and press Enter key.
Enabling TXTR keypad locking	<ol style="list-style-type: none"> <li data-bbox="381 617 875 783">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="381 806 875 914">2 Select Security and press Enter key. <li data-bbox="381 937 875 1045">3 Select PIN Required and press Enter key. <li data-bbox="381 1068 875 1176">4 Select Enable and press Enter key.

Function	Action (Continued)
Changing TXTR keypad lock PIN	<p>Note: Keypad locking must be enabled to set the PIN.</p> <ol style="list-style-type: none"> 1 Select  Main Menu > Settings and press Enter key. 2 Select Security and press Enter key. 3 Select Change PIN and press Enter key. 4 Type in old PIN and press Enter key. 5 Type in new PIN and press Enter key. 6 Retype in new PIN and press Enter key.

Function	Action (Continued)
Viewing software version	<ol style="list-style-type: none"> <li data-bbox="381 161 882 336">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="381 350 882 477">2 Select Version Info and press Enter key.
Restoring TXTR to factory default settings	<p data-bbox="381 481 882 656">Warning: Restoring TXTR to default settings will erase all content saved on device.</p> <ol style="list-style-type: none"> <li data-bbox="381 671 882 845">1 Select  Main Menu > Settings and press Enter key. <li data-bbox="381 860 882 976">2 Select Master Clear and press Enter key. <li data-bbox="381 991 882 1126">3 Select Yes and press Enter key.

European Union Directives Conformance Statement



Hereby, Motorola declares that this product is in compliance with

- The essential requirements and other relevant provisions of Directive 1999/5/EC
- All other relevant EU Directives

You can view your product's Declaration of Conformity (DoC) to Directive 1999/5/EC (to R&TTE Directive) at www.motorola.com/rtte. To find your DoC, enter the product Approval Number from your product's label in the "Search" bar on the web site.

DRAFT

motorola.com

FCC Caution

1. The device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.

2. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

3. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.