

Application Note

1 This product is intended for general consumption scenarios, please pay attention to the application scenarios of the product.

2 The illuminance is restricted by the installation environment, position and angle. The brightness value detected after the product is fixedly installed is the detection value of the current position. The light sensor hole on the front of the product is close to the true value when it faces the light source vertically;

3 The illumination deviation fluctuates greatly, and there will be a fluctuation deviation of about 10%;

4 Make sure that the ink screen is working within the specified temperature range. If it exceeds the working temperature range, it may work abnormally. Please place it in a normal environment as soon as possible. Check the test data value after 10 minutes;

5 When low battery occurs, please replace the battery in time;

6 The ventilation holes of the product should not be immersed in water;

Table Place Mode


7 The light hole of the product cannot be blocked by objects or covered with dirt;

8 The product is not suitable for use below 0°C, please stay away from harsh environments such as high temperature and high humidity;

9 The temperature felt by the human body depends on many factors, such as air temperature, heat radiation, relative humidity, human activities, etc. When the temperature is 10°C~28°C and the relative humidity is 41%, the human body feels the most comfortable. The measured brightness value depends on many factors, such as weather, window switch, light switch, position angle, etc. When the product desktop is flat, the front light hole is vertically upward, and the brightness value above 200lux is more suitable for office work.


Magnetic Mode

The smart brightness thermometer can be used on the desktop. Open the back cover halfway (at a 45° angle with the body), then the smart brightness thermometer can be stably placed on the desktop.



Wall-mounted Mode

The smart brightness thermometer can be combined with soft magnetic stickers to be attached to the surface of magnetically attractive objects such as refrigerators.

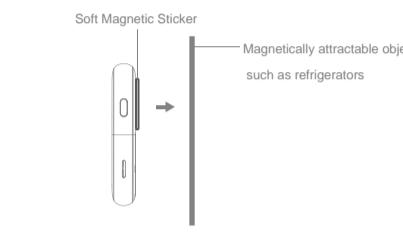

Maintenance

The smart brightness thermometer can be used with wall stickers and used on the wall.

Smart Brightness Thermometer (Zigbee Version)

Product Manual

FCC warning
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio communications, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.

Battery power-on
Open the body support, pull out the isolation sheet to power on.

Battery replacement
When the low battery icon appears on the screen, the battery power is too low, please replace the battery in time. At this time, it is necessary to open the body support, pry open the battery cover, and buckle the product upside down. Put the CR2032 battery in the battery compartment with the negative electrode facing down, and then press firmly against the buckle to close the back cover.

Maintenance

Battery power-on
Open the body support, pull out the isolation sheet to power on.

Battery replacement
When the low battery icon appears on the screen, the battery power is too low, please replace the battery in time. At this time, it is necessary to open the body support, pry open the battery cover, and buckle the product upside down. Put the CR2032 battery in the battery compartment with the negative electrode facing down, and then press firmly against the buckle to close the back cover.

Smart Brightness Thermometer (Zigbee Version)

Product Manual

FCC warning
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio communications, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.


Caution
Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Product Description

The smart brightness thermometer senses the changes in the ambient light, temperature, and humidity in real time, and can actively report to the user end. At the same time, it combines with other products to realize diversified smart home application scenarios.

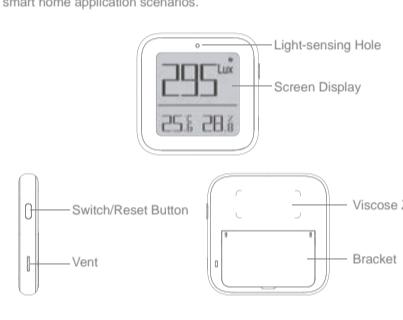


Preparation for use

- ① Connect your phone to WiFi → Network cable → Smart phone → Smart host → Router LAN port → WAN port
- ② Make sure that the product is within the effective coverage of the smart host (gateway). Zigbee network to ensure the effective connection between the product and the smart host (gateway) Zigbee network. "Make sure that the smart host has been added."
- ③ Download and open the APP
- ④ Search for "Smart Life" in the App store or scan the QR code in the manual to download and install the App. Press the "Register" button to register an account if this is your first time use; if you already have an account, press the "Login" button.

Scan the QR code to download "Smart Life" App

Network Access Setting

- After successfully installing the battery on the device, and ensure that the mobile phone is connected to the network and the smart gateway has been successfully added;
- Open the "Smart Life" App, on the "Smart Gateway" page, click the "Add Sub Device" button;
- Select "Temperature and Humidity Sensor" in the Device Type list;




Function Setting

- After adding successfully, you can find the device in the "My Home" list.

Switch Temperature Unit

The temperature unit displayed on the screen of the smart brightness thermometer can be switched between Celsius °C and Fahrenheit °F.

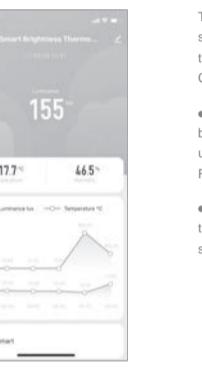

Product Specifications

Product Name	Smart Brightness Thermometer (Zigbee Version)
Battery Model	CR2032 button battery
Wireless Protocol	Zigbee
Temperature Measurement Range	0°C~50°C
Humidity Measurement Range	0%~99RH%
Temperature Accuracy	±0.3°C
Humidity Accuracy	±3RH%
Light Detection Range	0~999lux
Light Perception Accuracy	0.01lux
Product Size	66x66x11mm
Screen Size	45x45mm
Product Weight	45.0g

Packing list

- Thermo-hygrometer x1
- Wall sticker x1
- Soft magnetic sticker x1
- User manual x1