

BLUETOOTH HANDS-FREE WITH FM SPEAKERPHONE



User Manual

All other trademarks included herein are the property of their respective owners. The Bluetooth® word mark and logos are owned by bluetooth SIG, Inc. (Design and specifications subject to change without notice)




INDEX

Panel part.....	02
Side part	03
ON & OFF.....	04
Pairing	04
Opening the FM transmitting function.....	05
Setting the FM frequency.....	05
Closing the FM transmitting function.....	05
Making a call	06
Pronunciation dialing	06
Last redialing.....	06
Listening the incoming call.....	06
Rejecting the call	07
Mute function	07
FM Transmitter Function.....	07
Terminating a call.....	08
LED indication	08
Fixation of the hands free.....	08
Specifications	09

01

Panel part


There are two indicating LED on the panel, one is blue color LED, another red & green dual LED. And there are three keys, S1 is power key, S2 is answer/end key, S3 is FM frequency enactment key.

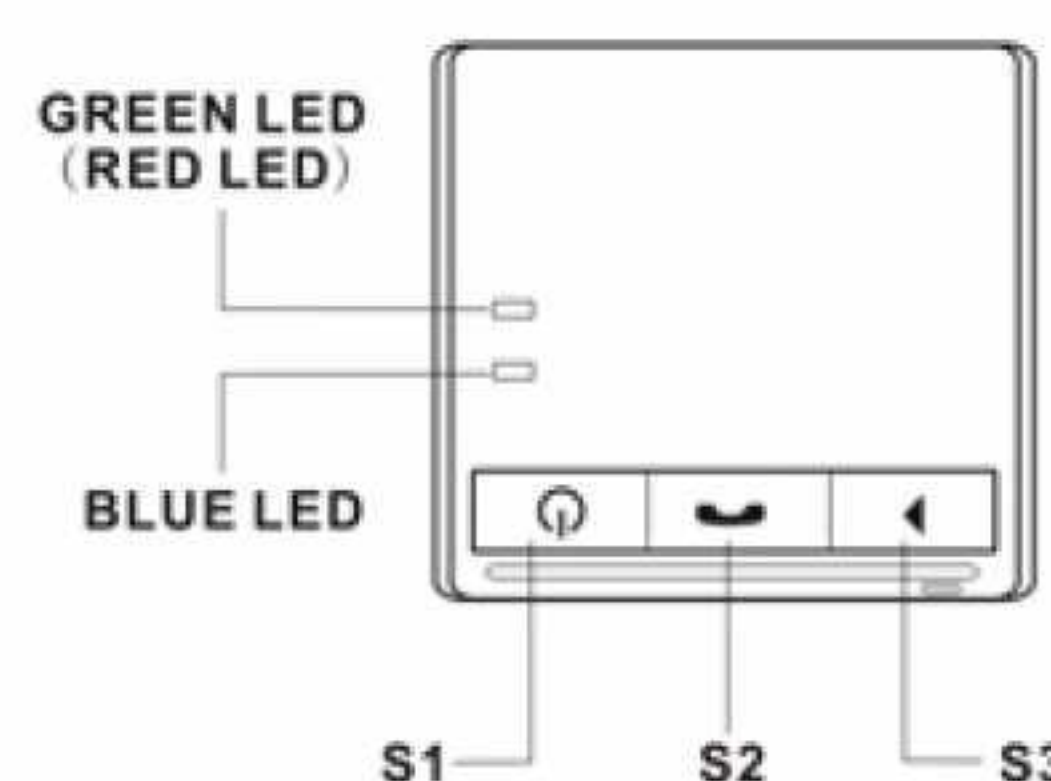

02

Side part

There are six LED display the frequency, they respectively corresponding to: 90MHz, 91MHz, 92MHz, 93MHz, 94MHz, 95MHz, Also with two MIC input, one is for gathering the sound, the other one is for noise suppression & echo cancellation.

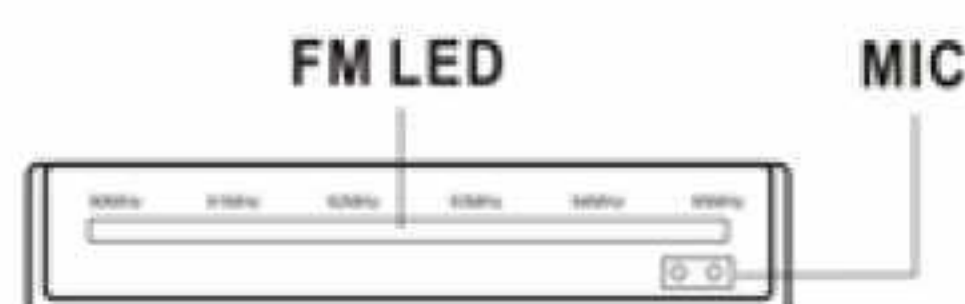

3.5 stereo jack is exterior audio frequency input connection, Mini 5 Pin USB socket is for charging. You can charge the hands free by connecting the hands free to car charger via this socket.



03

USER Manual

Pls switch on the car reception equipment and tune to the corresponding FM transmitting frequency of bluetooth hands free. Pls adjust until you achieve good receiving effect.

1. ON & OFF:

Press and hold the S1 key for about 5 seconds in the OFF mode then release. The blue LED indicator will glitter slowly to initiate the standby mode.

Press and hold the S1 key for 4 seconds in any mode to shut down the Hands Free with long beep sound.

2. Pairing:

Press and hold the S1 key for about 7 seconds in the OFF mode, The blue LED indicator will glitter and change to long bright, it indicate the hands free is in pairing mode. Enter the password 0000 to pair and connect.

(Please follow the instruction of the Bluetooth mobile phone User Manual to set and connect.)

04

3. Opening the FM transmitting function:

When you power on the hands free, it won't enter the FM ON mode immediately, pls switch on the FM by hand. Pls press and hold the S3 key for about 4 seconds then release. The FM LED indicator of the 90MHz will glitter incessantly, it show the FM works at the 90MHz.

4. Setting the FM frequency:

In FM works mode, press the S3 key for 1 second, then release, the FM LED indicator will change to the next frequency. Repeat the operation, the FM frequency will be in turn changed, 92MHz, 93MHz, 94MHz, 95MHz then back to 90MHz and in turn repetition.

5. Closing the FM transmitting function:

In FM works mode, press the S3 key for about 4 seconds, then release. The FM LED indicator will be extinguished which shows the FM is closed.

05

6. Making a call:

You can make a call by dialing the keys on the mobilephone as usual, the sound will transfer to the hands free.

7. Voice dialing:

When the mobile phone in connecting mode, pls press S2 key, you will hear prompt pronunciation dialing. (Your mobile phone must support voice dialing function)

8. Last redialing:

When the mobile phone in connecting mode, pls press and hold S2 key about 3 seconds.

9. Listening the incoming call:

The Car Kit will beep or ring when there is an incoming call. Simply press the S2 one second or you can press the "Answering" on the mobile phone to receive the call as usual.

06

10. Rejecting the call:

When there is an incoming call, pls press and hold the S2 key about 3 seconds to reject the calling.

11. Mute function

To silent the microphone during an active call, press and hold the S2 key for about 3 seconds, the Silent function is on. When your headset is in the Silent mode, you could repeat the operation or press and hold the S1, the Silent mode is off.

12. FM Transmitter Function

The hands free can also be used as FM Transmitter. You can play your music from your MP3 player by connecting your MP3 player to the 3.5 Stereo Jack with audio-in cable supplied in the kit. The hands free will auto switch to incoming call if you pair your mobile to the hands free at the same time.

07

13. Terminating a call:

To terminate a call, press S2 about 1 second to terminate the call.

14. LED indication

Blue LED: The bluetooth active condition, in connecting it will flash per 3 seconds, in the telephone conversation it will flash quickly, when pairing is often bright.

Red LED: When the battery voltage is low, it will flash slowly.

Green LED: During charging, it will on all the time, when finish the charging, it will off.

15. Fixation of the Hands Free:

The unit can be fixed both to ventilation rack and to sunshade panel by two different clips turned around in the acceptor on the backside hands free.

08

See pictures as below:



Ventilation rack clip



Acceptor of car kit



Kit Sunshade panel clip

Specifications:

Bluetooth version	V2.0
Wireless frequency	2.40-2.48GHz
Transmit range	10 meters
Charging time	about 2 hours
Size	55X56X13.5 mm
Weight	about 50g
Talking time	8 Hours
Standby time	120 Hours

09

Operation Temperature	-10°C-50°C
Relative humidity	<65%
FM frequency	88MHZ-108MHZ
Frequency response	20-15KHZ, SNR≥ 68dB, Stereo Separation> 50dB, THD<0.1%, Transmit Level<104dBuV
Transmission range	10 meters
Transmitting frequency	fixed 6 frequency
Battery	5V /300mA / Rechargeable

10