

# CROSS BAR DENT REPAIR KIT

**Model 66957**

## INSTRUCTIONS AND PRECAUTIONS

Distributed exclusively by Harbor Freight Tools®.  
3491 Mission Oaks Blvd., Camarillo, CA 93011  
Visit our website at: <http://www.harborfreight.com>



**SAVE THESE  
INSTRUCTIONS.  
READ ALL  
PRECAUTIONS AND  
INSTRUCTIONS.**

Copyright© 2009 by Harbor Freight Tools®. All rights reserved. No portion of this document or any artwork contained herein may be reproduced in any shape or form without the express written consent of Harbor Freight Tools. Diagrams within this document may not be drawn proportionally. Due to continuing improvements, actual product may differ slightly from the product described herein. Tools required for assembly and service may not be included.

**For technical questions or replacement parts,  
please call 1-800-444-3353.**

***Please note: Harbor Freight Tools is not  
responsible for damage to vehicle finish result-  
ing from use of this product.***

## SPECIFICATIONS

Glue Gun	120VAC / 60 Hz / .33 A
Crossbar Adjustment	3" min. to 5" max.

## UNPACKING

When unpacking, make sure that the item is intact and undamaged. If any parts are missing or broken, please call Harbor Freight Tools at 1-800-444-3353 as soon as possible.

## IMPORTANT SAFETY INFORMATION

1. Wear ANSI-approved safety goggles and heavy-duty work gloves during use.
2. Contains glue; keep away from children. This product is not a toy. Do not allow children to play with or near this item.
3. Use as intended only.
4. Inspect before every use; do not use if parts are loose or damaged.
5. Maintain product labels and nameplates. These carry important safety information. If unreadable or missing, contact Harbor Freight Tools for a replacement.

## INSTRUCTIONS




Read the **ENTIRE IMPORTANT SAFETY INFORMATION** section at the beginning of this document including all text under subheadings therein before set up or use of this product.

1. Insert Glue Stick (2) into Glue Gun (1). Plug in Glue Gun and allow to warm up for ten to fifteen minutes before use.
2. Using clean cloth (not included), clean dent area with Release Agent (3). Then apply heated glue from Glue Gun to end of desired Pull Tab (4).
3. Place Pull Tab on center of dent and hold there for ten seconds. **WARNING!** Do NOT push Pull Tab against dent.
4. Place Cross Bar (5) over Pull Tab, setting Adjusters (9) to desired length. Thread Wing Nut (6) onto end of Pull Tab. Continue to twist Wing Nut until dent is raised. Stop when dent returns to normal surface level.
5. Unthread Wing Nut and remove Cross Bar and Pull Tab from surface. Apply two drops of Release Agent to spot of dried glue. Use Scraper to peel off softened glue patch.
6. If a high spot has been created, use a hammer (not included) and lightly tap Dowel (8) against raised spot until desired smoothness is reached.
7. **Note:** The Repair Kit will not repair ALL kinds of dents, regardless of size. The Repair Kit will also not work on aluminum panels or surfaces.

## PARTS LIST & DIAGRAM

Part	Description	Qty.
1	Glue Gun	1
2	Glue Stick	3
3	Release Agent	1
4	Pull Tab	2
5	Cross Bar	1
6	Wing Nut	1
7	Scraper	1
8	Dowel	1
9	Adjuster	2

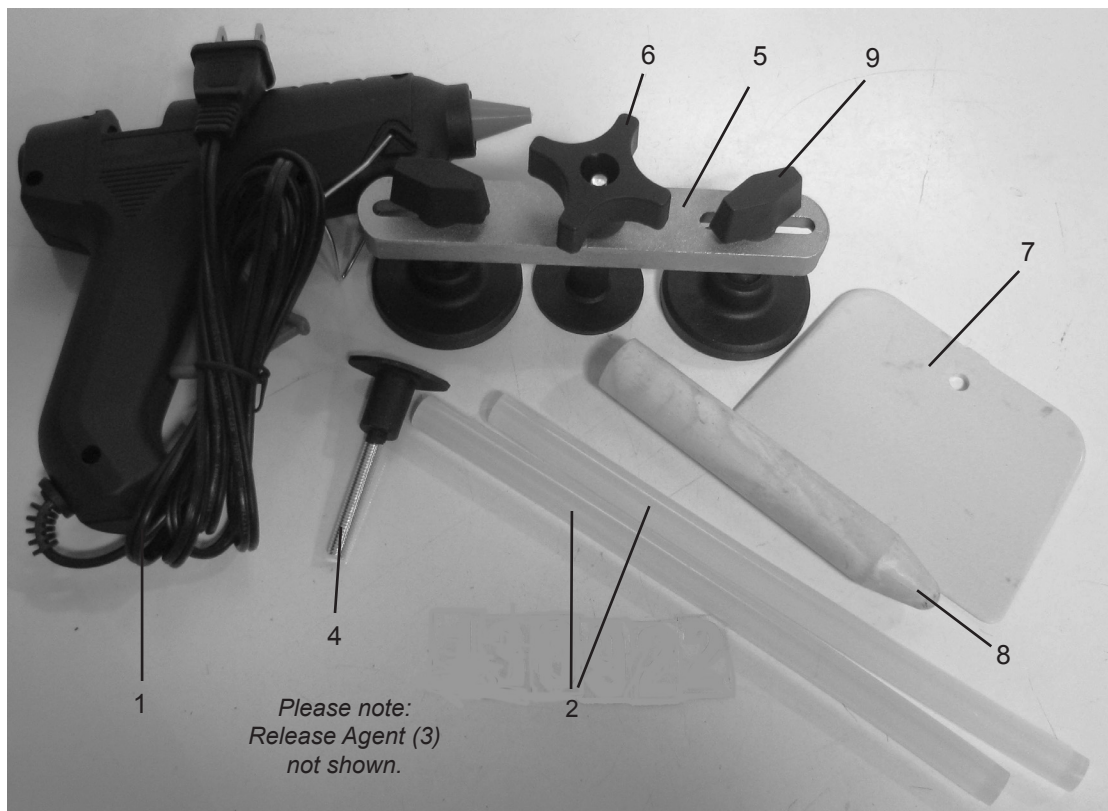

**Record Serial Number Here:** \_\_\_\_\_

**Note:** If product has no serial number, record month and year of purchase instead.

**Note:** Some parts are listed and shown for illustration purposes only, and are not available individually as replacement parts.

### PLEASE READ THE FOLLOWING CAREFULLY

THE MANUFACTURER AND/OR DISTRIBUTOR HAS PROVIDED THE PARTS LIST AND ASSEMBLY DIAGRAM IN THIS DOCUMENT AS A REFERENCE TOOL ONLY. NEITHER THE MANUFACTURER OR DISTRIBUTOR MAKES ANY REPRESENTATION OR WARRANTY OF ANY KIND TO THE BUYER THAT HE OR SHE IS QUALIFIED TO MAKE ANY REPAIRS TO THE PRODUCT, OR THAT HE OR SHE IS QUALIFIED TO REPLACE ANY PARTS OF THE PRODUCT. IN FACT, THE MANUFACTURER AND/OR DISTRIBUTOR EXPRESSLY STATES THAT ALL REPAIRS AND PARTS REPLACEMENTS SHOULD BE UNDERTAKEN BY CERTIFIED AND LICENSED TECHNICIANS, AND NOT BY THE BUYER. THE BUYER ASSUMES ALL RISK AND LIABILITY ARISING OUT OF HIS OR HER REPAIRS TO THE ORIGINAL PRODUCT OR REPLACEMENT PARTS THERETO, OR ARISING OUT OF HIS OR HER INSTALLATION OF REPLACEMENT PARTS THERETO.